



PRIME User Guide

Version 4.9

CONTENTS

Overview	11
Performance	13
PRIME Startup Screen	14
Preview Scenes	19
Preview / Program Display Options	20
Control Panel / Replaceable Panel Toggle	21
Previewing Animations and Save Options	22
Scenes vs Messages	24
Projects	26
Opening a New Project	26
Opening a Pre Existing Project	26
Removing a Project	28
Deleting a Preexisting Project	28
Editing a Pre Existing Project	28
Layouts	28
Tools	32
Application Scripting	32
Zip & Unzipping Assets	32
Settings	33
Settings Configuration	34
General	35
Control Panel	41
Appearance	42
Folders	44
Startup Scenes	47
Clips	48
Quality Control	50
Language	52
Logging	53
BXF	55
CAMIO	56

Hub Drive	57
Scripting	58
Hardware/Playout Configuration	58
Subchannels	58
Replaceables-Automation ID's	59
Configuration	59
Preparing the Scene for Automation (The Replaceables-Automation List)	59
Devices Configuration	63
GPI In	65
X-Keys	67
Import and Export Configs	68
Playlists	71
Configure Playlists	71
Take List	71
Sequence	77
Playlist as a Still Store	78
Shortcut Key Editor	78
Playout Shortcut Keys:	78
Reset to Defaults	79
Erase vs Clear Shortcuts	80
Component	80
Global	81
Designer Shortcut Keys	82
Tools	83
Parameters	85
Master Control Panels	86
Help	91
Open Log Folder	92
Show Current Log	93
Designer	94
Design for specific licensed options	94
Live Mode	94
Designer Settings	95

File	95
New Scene	95
New Base Scene	95
New Edge Scene	95
New Master Control Panel	95
Application Logic	95
Save as CAMIO File	95
Import FBX	96
Import SVG	96
Import AE	96
Editor Settings	97
General	97
New Scene	97
Layout	97
Default Region of Interest	98
Thumbnail	98
Canvas Settings	99
General	99
Color	100
Safe Title	100
Ruler Guides	100
Creating Guides	100
Deleting Guides	100
Align (Smart Guides)	100
Copy/Paste Mode	101
Control Panel Settings	102
Scene Tree	102
Filter	102
Highlight	102
Action Settings	103
Timeline	103
Animations	103
Parent	104

Hide	104
Show	104
Keyframes	105
Properties	105
Save	105
Copy/Paste	106
Node Coloring	106
Project Settings	108
Text Settings	108
Default Style	108
Enable Tab Key to Cycle Text Objects	109
Canvas Properties	109
Axis Mode	109
Auto Select	109
Selecting Overlapping Objects	110
Pan & Zoom	110
Show Wireframe-Normals-Key	110
Show Bounding Box-Manipulators	111
Custom Canvas Resolutions	112
Scene Properties	115
Command Sequence:	117
Scene Events	121
Scene Objects	124
Base Scene	125
Circle Object	127
Clip Object	131
Cone Object	140
Cube Object	140
Cylinder Object	143
Freehand	146
Group Object	147
Image Object	150
Model	163

Polygon Object	163
Pod Object	169
Rectangle Object	171
Sphere Object	174
Text Object	177
3D Text	191
Text Events	192
Text Tags	194
Style Tags	195
Tube Object	196
Video Input Object	198
Audio Properties	201
Alignment Tools	203
Align	203
Distribute	203
Snap to Grid	204
Color Picker-Eye Dropper	204
Effects	205
Align	205
Auto Follow	207
Auto Hide	211
Auto Scale	212
Auto Spacing	213
Billboard	214
Blur	215
Camera	216
Character	217
Chroma Key	219
Clip Plane	222
Crawl	223
Crawl Commands	227
Crop	229
Duplicate	230

Bind To Table - Drop down will display table resource available in scene	231
Table - Select table you want to bind to	231
Grid	232
HDR	233
JavaScript	235
Inline Text	237
Logic	238
LUA	242
Mask	244
Layer Masks	244
Group Masks	245
Material	246
Multi Style	255
Page Turn	260
Parameters	261
Photoshop Import	263
QR Code	265
Render to Texture	267
Roll	272
Roll Crawl	272
Scale to fit options	274
Text Uniform Scale	275
Auto Scale	276
Multi Scale	277
Auto Size	279
Shader	281
Style	281
Style Sheets	284
Table	289
Texture	291
Texture Matrix	292
Touch	292
Transform	293

Transition	294
File Based Transitions	294
Custom Transitions	300
Warp	301
Virtual Group	301
XMP	303
XMP LUCI Workflow	305
Resources	306
Ancillary Data	307
Audio	308
Base Scene	310
BXF-Broadcast Exchange Format- As Run Files	312
Clip Player	314
Control Panel	315
Data	315
GPI Out	315
GPI In	317
Hot Key	318
LIDIA	320
Message	321
Plugins	322
Table	323
Script	328
Timer	328
Clock	329
Timer Up	329
Timer Down	329
Time Countdown	329
Date Countdown	329
Time Countup	329
Date Countup	329
Timer Commands	330
Formats	331

XKeys	334
Playout	334
Scene based	335
Scene Tree	336
The Objects Column	338
Objects Properties	338
The Effects Column:	339
Resources	340
Parameters/Expressions/Conditions/Replaceables:	340
Timeline Editor	341
Animation Track Properties	342
Default Action	343
Set Default Keyframe	344
Color Coding the Timeline	345
Keyframe Property Values	346
Keyframe Interpolations:	347
Keyframe Timeline Ease Editor	349
Keyframe Spline Editor	350
Triggers	353
Trigger List	353
Triggered by List	353
Timeline Triggers	355
Control Panel Triggers	356
Triggering C# Scripts	356
Application Logic	357
External Activations	360
Bindings View	363
Events	365
Parameters Editor	368
Expressions Editor	369
Scene Control Panel	371
Shortcut Keys	377
Parameters, Expression & Conditions	378

Replaceables	378
Effect In/Out	380
Conditional Transitions	381
Conditional Transitions Advanced	382
Update In/Out	385
API & Scripting	386
Bypass	387
Power Clips	388
Adding and Configuring Power Clips Controllers	388
Showing the Power Clips Controllers	388
Default Transition	389
Playing Power Clips	389
Editing the Clip Metadata	390
Creating a Power Clip	392
Creating Clip Transitions	396
Creating a Sub-Clip	398
Searching for Clips	400
Edit/Save Searches	400
Advanced Searching	403
Archiving Clips	404
Clip Recorder	407
Adding and Configuring Power Clips Recorders	407
View the Clip Recorder	407
Clip Convertor	409
CAMIO	410
Template Preparation	410
Replaceable Fields	411
Auto Erase	411
LUCI Preview Only	412
Publishing	414
Publish a single scene	414
Publish a Project	415
CAMIO Playback	415

Configure the CAMIO Server:	415
Configuring for Playback Control:	417
CAMIO Renderer	418
The CAMIO Renderer Automation Connection:	418
Configure the CAMIO Renderer End Point:	418
LIVE	418
Uploading to LIVE	418
Configure Live Uploader	418
Upload a single scene	419
Display Matrix Display Port (GPU) Output	421
PRIME System Types	422

Overview



Please note that the PRIME User Guide is always in progress.

PRIME is ChyronHego’s advanced graphics playout and authoring system. It is based on ChyronHego’s fast and powerful dedicated PRIME Engine (previously known as as GS2)

PRIME allows for both design and playout in a single application. This fully featured application is designed as a multi-purpose platform that is dedicated to Advanced Systems Integration.

PRIME’s “Event Driven” architectural model allows users to utilize an array of capabilities for connecting and reacting to scene changes. Binding objects and Data is quick, easy and intuitive.

The “Point & Click” user interface enables advanced functionality without the usually required advanced scripting.

The power of PRIME's "Advanced Data Object," along with the Expression builder, ensures simplicity and ease of use for both Point & Click Acquisitions and the Parsing and Playout of data. PRIME also supports VB and Jscript for more advanced and complicated workflows. C# scripting is also available for an integrated development environment.


Automation for PRIME includes:

- ChyronHego's Intelligent Interface, along with an accompanying powerful Pattern matching Rules Engine
- VDCP
- PBus
- UDP server to receive broadcast requests


"Warp Technology," an advanced and unique feature in the PRIME Render Engine, allows users to create and import animated clip effects created in After Effects, 3D Studio and other 3D design tools. Additionally, PRIME Render Engine can map real time updateable content into the effect in design or during runtime.

Performance

PRIME is accompanied by a utility tool for measuring the application and system performance. This tool is called the **PRIME Engine Performance Monitor** and is located on the Start menu inside the Prime Engine folder

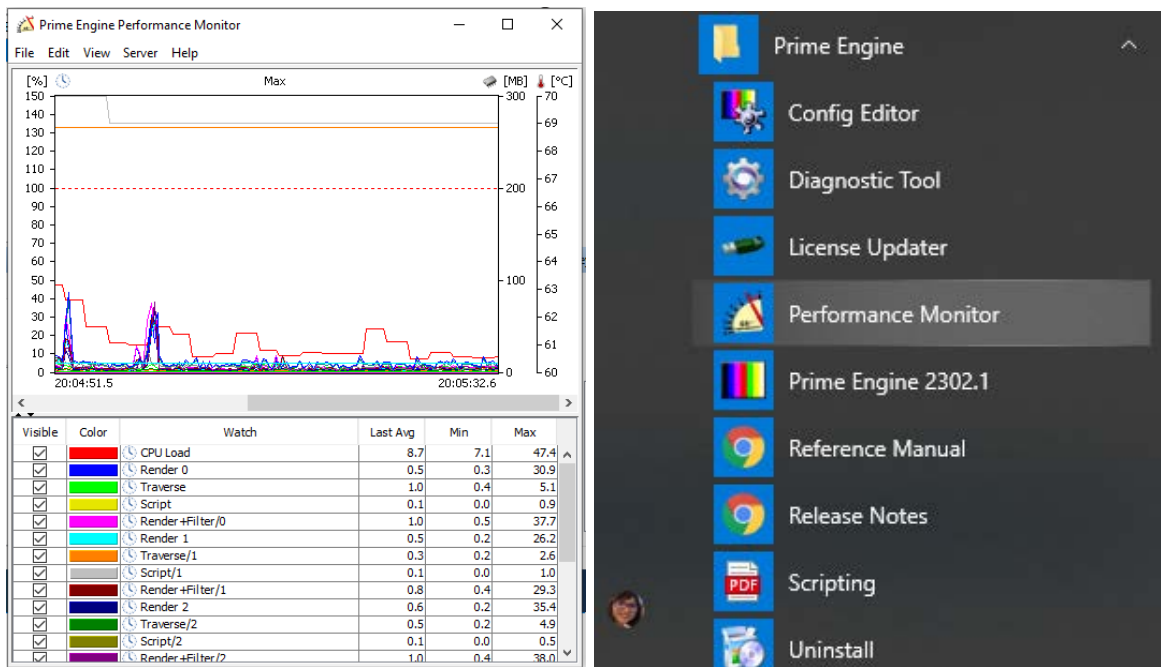

PRIME Startup Screen

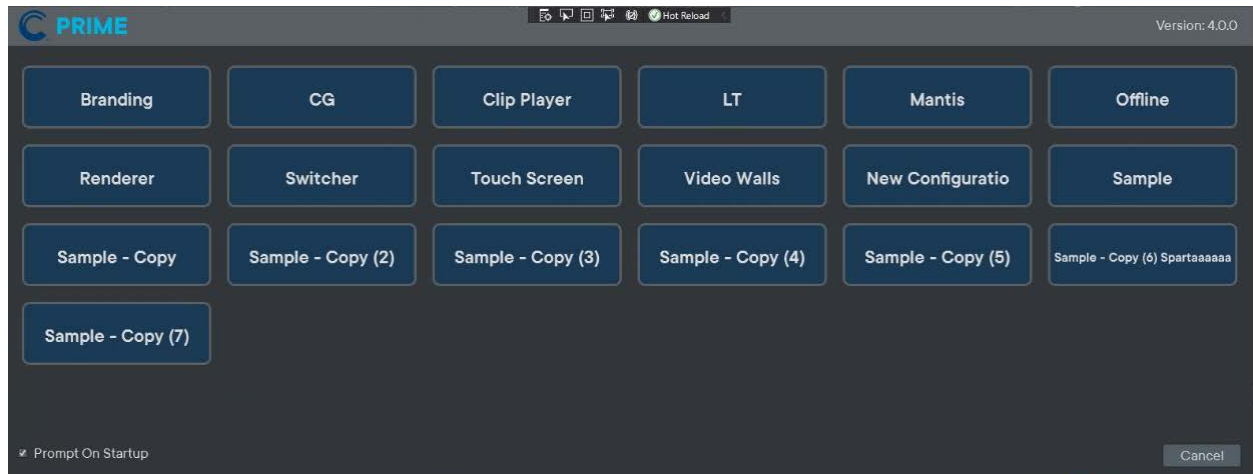

PRIME offers a selection of pre configured playout configurations.

The default is set to 8 predefined buttons that will always exist on the startup page.


This page uses the configuration directory sub folder that exists in the users "Config->Settings->Root Settings Directory".

Users can define their own configurations which will be added to the list.

To add your own configuration button to the startup page modify the Playout Configuration and then save it. It will auto populate the Startup Selection screen.


To Delete a Configuration button you can right click on a button or remove the configuration file from the directory.

Runtime User Interface

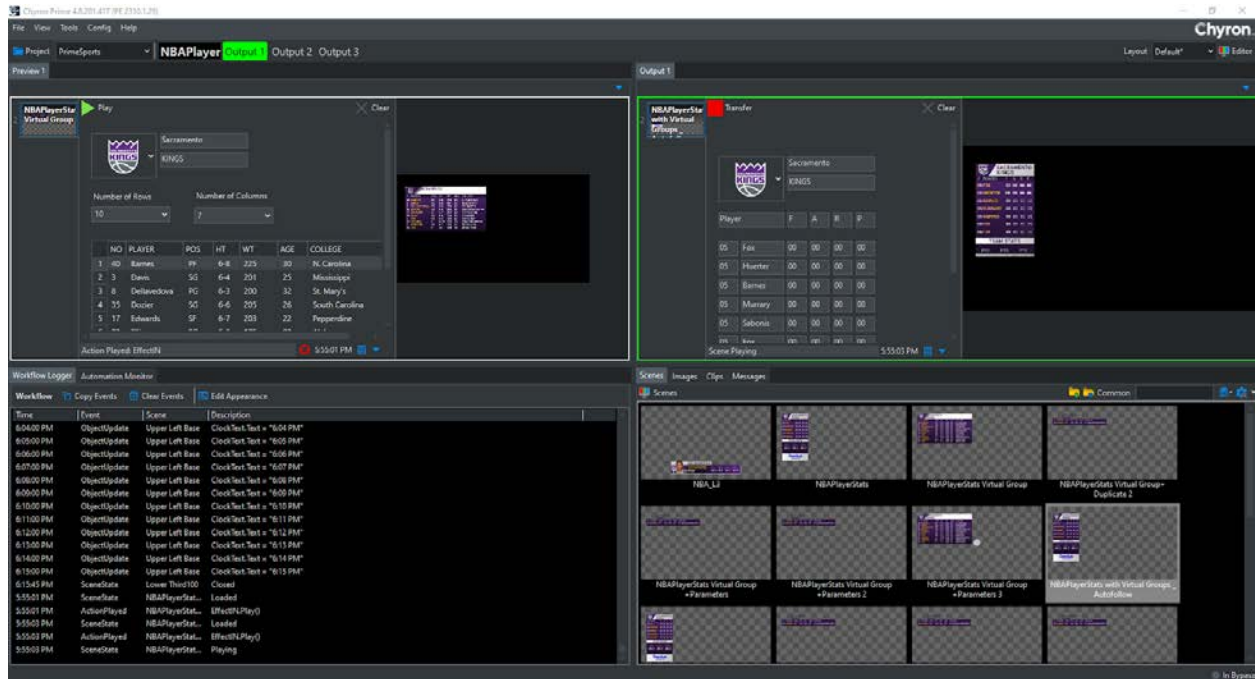

The main **Runtime User Interface** in PRIME is used for playout. PRIME can be configured for both a fully functional **preview** and program. Both the preview and program both have proxies.

Channel Proxy Visibility

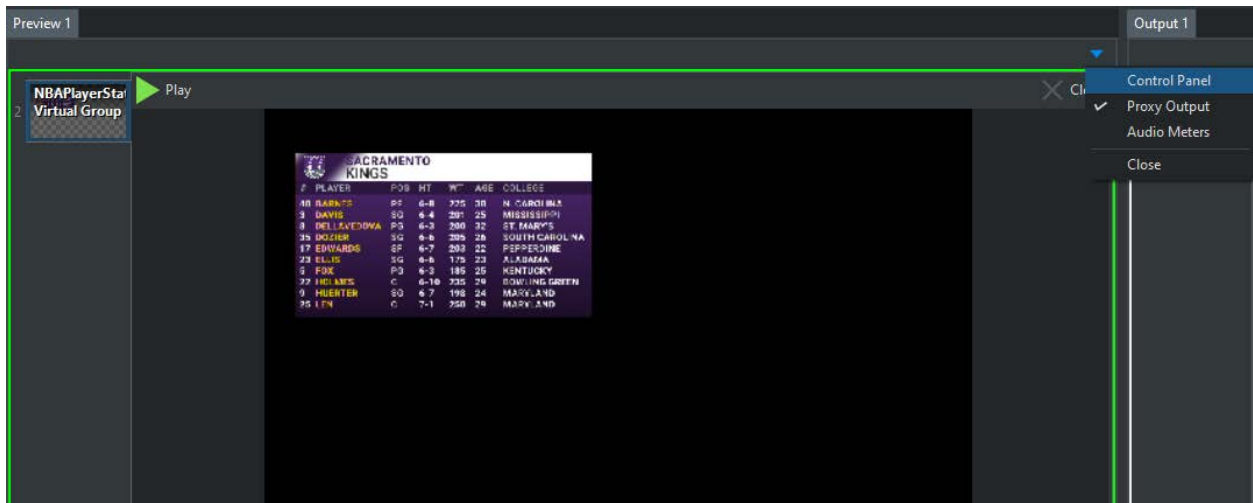

Enable and disable visibility of:


- Control Panel
- Proxy Output
- Audio Meters

For each configured Channel (Preview & Program)


Playing the preview to air, regardless of its state, will default it back to its default state to ensure proper operation.

During Scene Design, each scene is assigned an output channel which may be any negative or positive value. The channel number determines the compositing output order. Each channel may only have a single scene assigned to it. If a scene on output is occupying Channel 1 and a preview scene assigned to Channel 1 is played to air, it will “Effect out” the current scene on Channel 1. Additionally, multiple scenes from preview may be moved to output in a single take.


In the image below, there are 3 scenes loaded into preview. Each scene is in a different layer: Layer 1, Layer 2 and Layer 3.

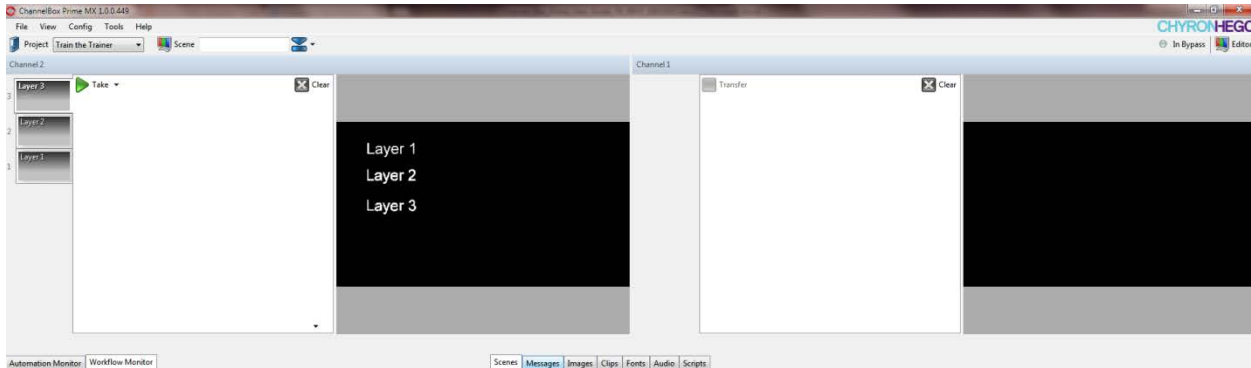

Users may choose to take all three scenes to air as a composite or select scenes individually.

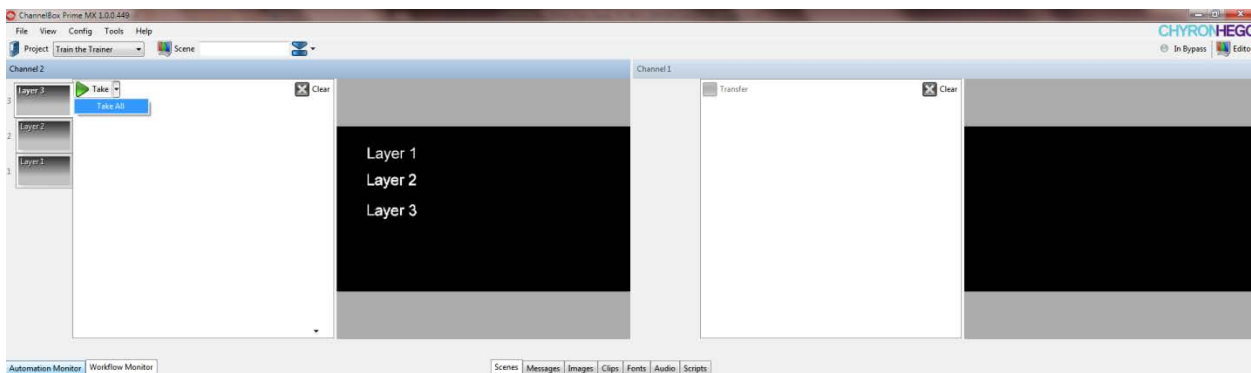


For example, here all three scenes have been taken to air while another scene is loaded into layer 1.

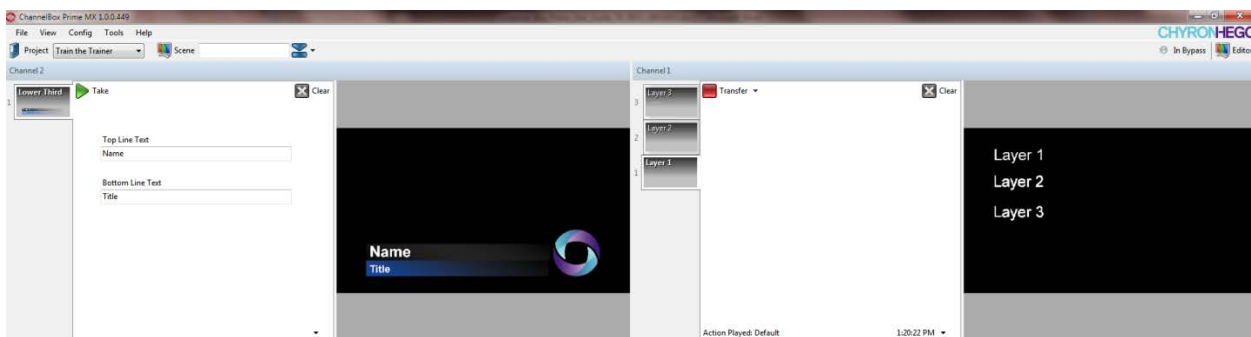

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

If the scene that is now loaded into layer 1 is sent from preview to air, it will bump off the existing scene on output that was assigned layer 1.

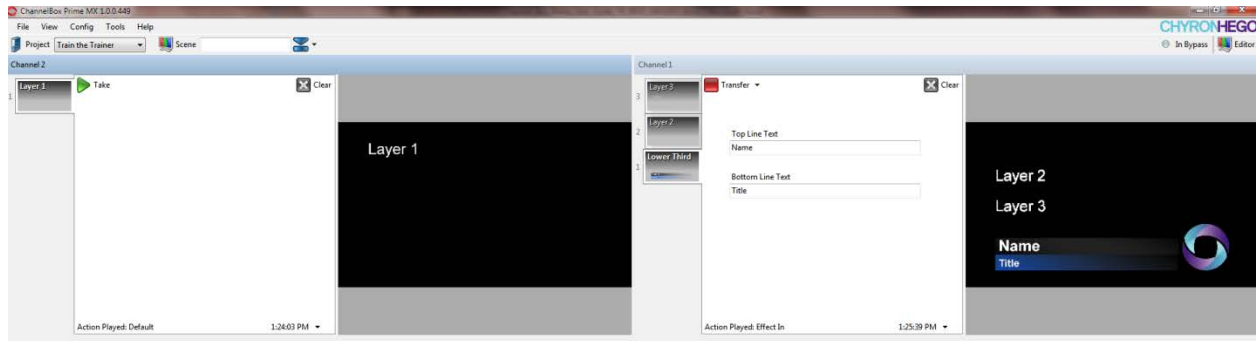

Preview Load Behavior options allows for Multiple Scenes, Single Scene Per Layer or Single Scene only.

Output **Layer** assignments are properties of the scene.

Scene Properties

Name Enabled

Scene


Description

Message Id

Layer


Preview Scenes


Output channels can have “Previews”. Multiple scenes can be loaded into a preview channel.

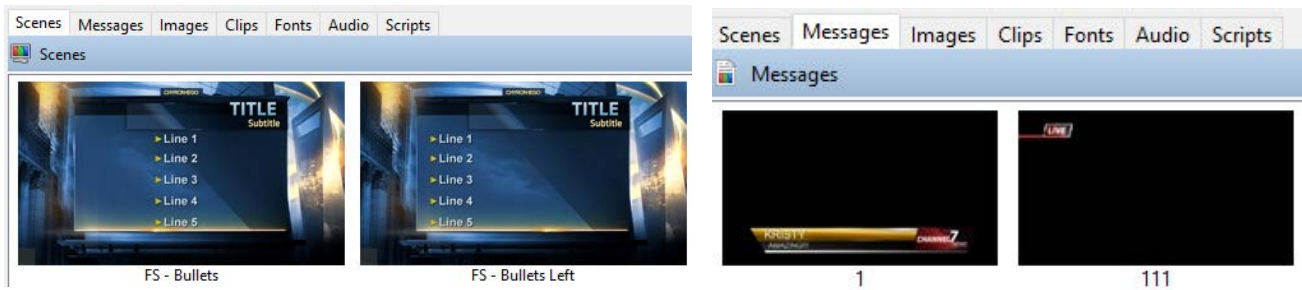

Multiple scenes can be played to air simultaneously.

Scenes can be fully previewed in the preview channel. No matter what the state is of the scene in the preview channel the scene will revert to the “Default” state when played to air. In the example below two scenes are loaded into preview. One scene is in layer 5 and the other scene is in layer 1. These two scenes can be played to air individually or as a group. They can be cleared individually or all.

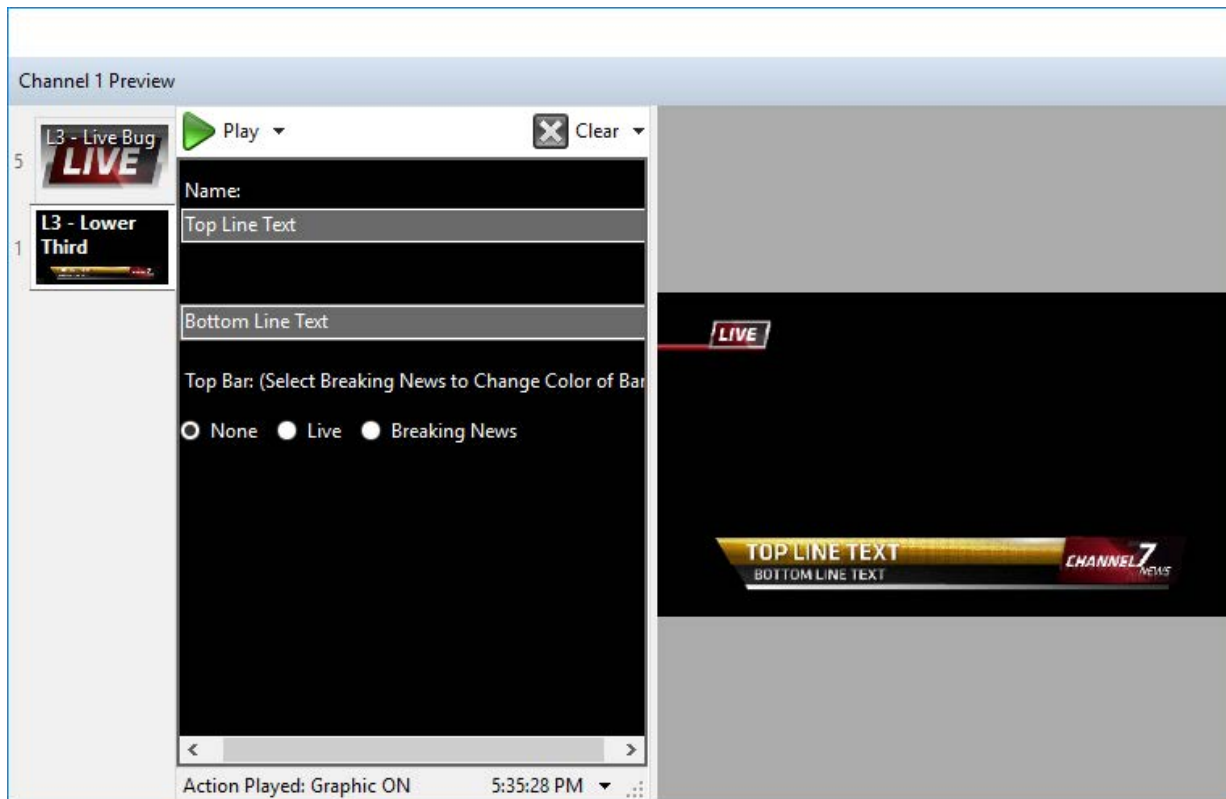


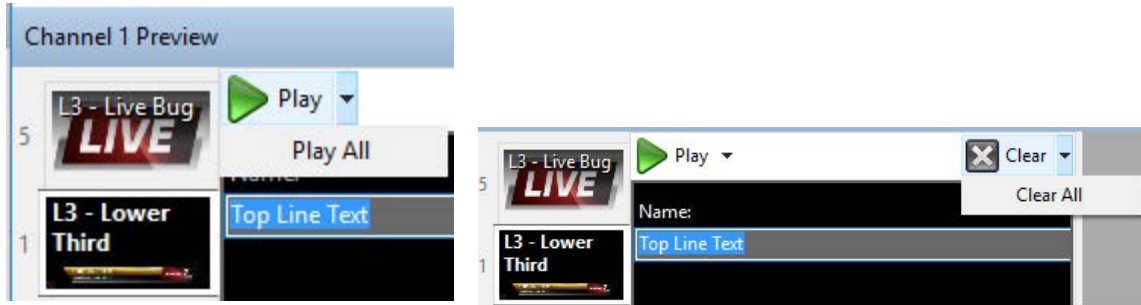

Preview / Program Display Options

For each configured Preview and Program channel you can choose to hide or show a proxy output, control panel and audio meters. Use the drop down arrow in the proxy windows upper right hand corner to check or uncheck desired selection


Control Panel Visible:

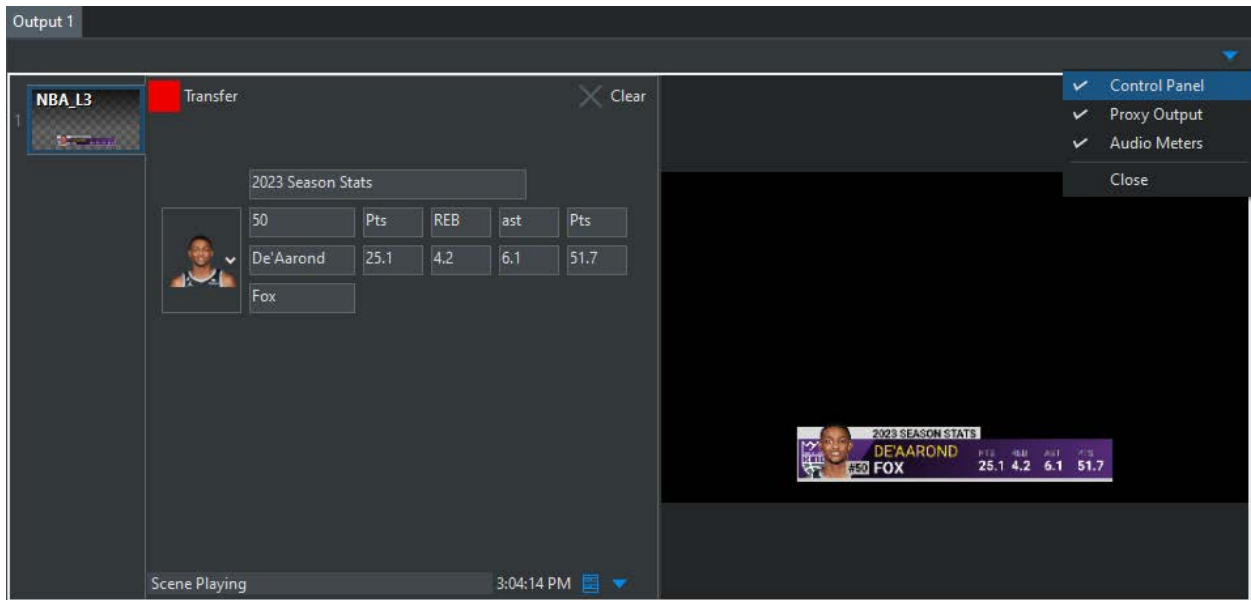

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Control Panel / Replaceable Panel Toggle

To toggle between a control panel (this requires a control panel resource has been added the loaded scene, and applicable control panel objects), and replaceables panel (required replaceable objects added to the parent scene) then click on the control panel / Replaceable toggle icon in the bottom right of the control panel region.

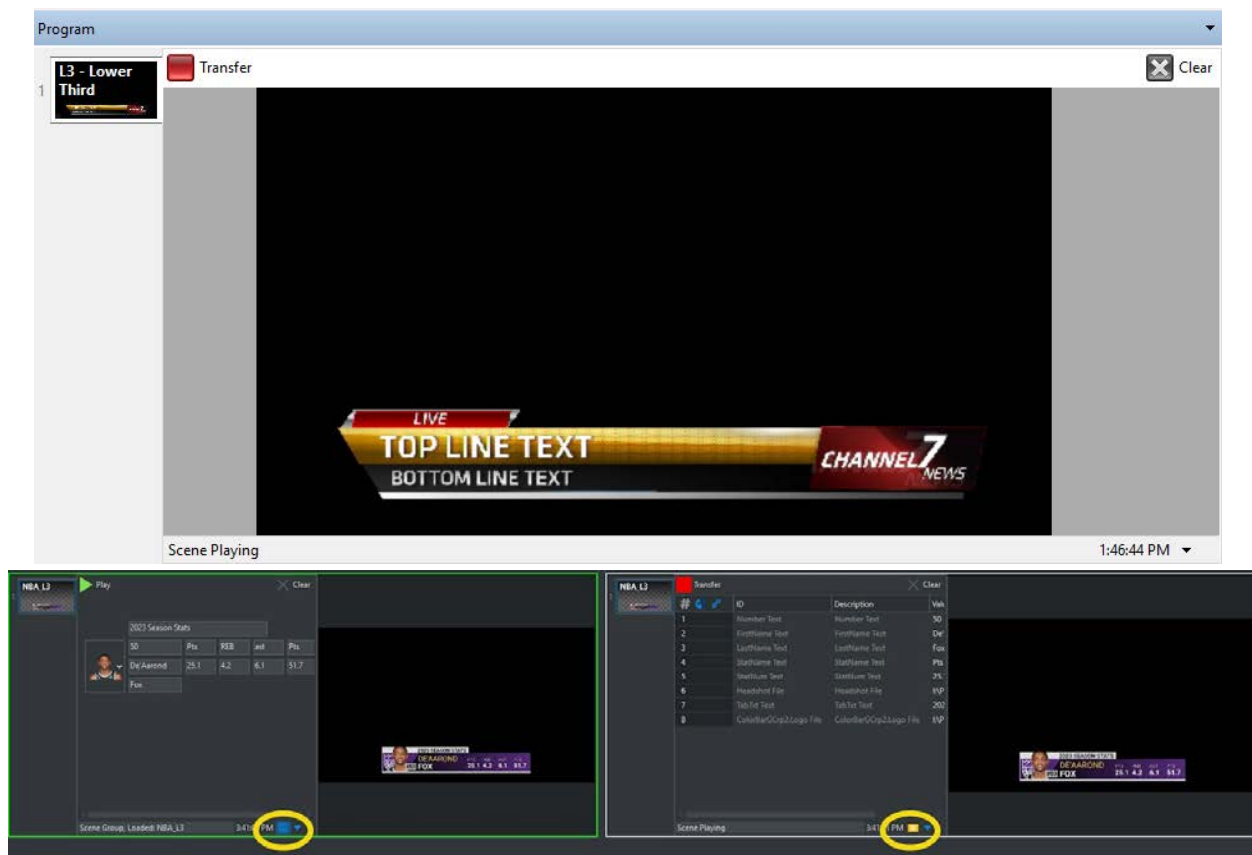

Control panels allow for more complex and custom designs.

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

A replaceable panel is more limited and restrictive than a control panel. Replaceable panel support:


- Order: Enable / Disable II (Intelligent Interface for W commands)
- EX: Enable / Disable External Updates
- Databound: Enable / Disable
- ID: Read only. Updates to this alphanumeric value must be made to the scene in Prime designers replaceables.
- Description: Read only. Updates to this alphanumeric value must be made to the scene in Prime designers replaceables.
- Value: This is an editable field. For a value update to take effect, click enter.

ID, Description and Value columns can be rearranged, by dragging on the column header.

The selection of either control panel or replaceable panel will hold true for each individual preview/program channel.


Previewing Animations and Save Options

The dropdown in the lower right-hand corner allows for the following

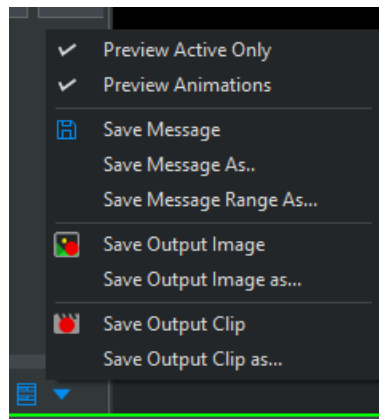

- **Preview Active Only:** When enabled, only the selected scene will show in the Preview. Otherwise, the preview will be a composite of all loaded scenes.

- **Preview Animations:** With this option enabled you can preview any animations that will occur within the scene. With this option disabled all animations will cut to the final keyframe and show the last state.
- **Save Message:** This option will save the scene as a “Template Data Message” and show up in the “Messages” browser. Refer to the section on Messages.
- **Save Message As:** Same as “Save Message” but prompts the user for a message name
- **Save Message Range As:** This option is primarily intended to be used with II & EX commands workflow. An individual message range can be saved to span over multiple message numbers. For example 100-199. If an II command is received for any message between 0-99 then a message will load with the settings applied from the message range. This elevates saving out 99 separate messages. Message Range will save in Messages folder 100-199.pbm

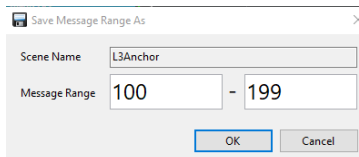

If a II/EX is received, and an individual message exists between a message range, then the individual message will load, not the message range message.

- **Save Output Image:** Saves the proxy image to file. The file location is in a sub folder of the projects “Image” folder named “Captures”. Ex:
I:\PRIME\Projects\News\Images\Captures.
- **Save Output Image As:** Save As dialog prompts the user to save the image file type and location. Currently supported formats are Tif, jpg and .png
- **Save Output Clip:** Saves the proxy scene as a clip file. The file location is in a sub folder of the project’s “Clips” folder named “Captures”. Ex:
I:\PRIME\Projects\News\Captures. Save output clip, will adhere to the last clip resolution set with Save Output clip as.

- **Save Output Clip As:** Save As dialog prompts the user to save the clip file name, output type, location and region of interest (cropped clip render). Currently supported formats are Quicktime Animation GTC, Motion JPEG, DNxHD, DNxHR, Web M. Region of interest must be predefined within the scene in Prime Designer prior to loading scene in Prime payout.

Rendered clips using “Save Output Clip” will only honor the Effect In. If an action within the scene is triggered within the Effect In, this will be honored in the render. The Effect Out will not be rendered, unless it is triggered by the Effect In.

Scenes vs Messages

Scenes:


Scenes are saved to the file system as .pbx files and comprise of all the elements of a scene. Scenes are defined as “Templates” or “Base Messages”.

Messages:

Messages are a subset of scenes and are much smaller in size that contain a reference to the parent Scene file. Messages use the .pbm file extension. Messages are defined as “Template Data Messages”, “Automation files. See the separate section “Messages” for detailed information on creating and editing scene Messages.

Scenes and Messages can have their own independent browsers.

In the Messages browser, if you hover over the thumbnail you will get various metadata including the parent scene name.

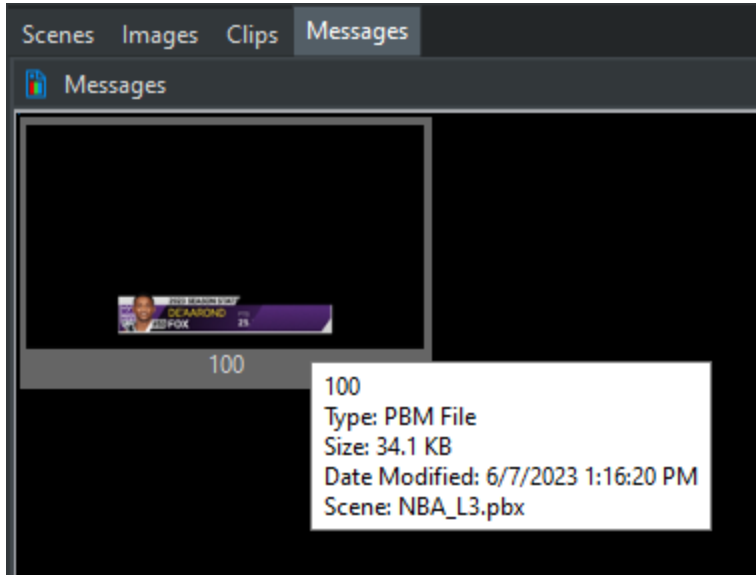

Projects

Opening a New Project


To open a new project:

- From the Main User Interface, select **File** from the top menu bar.
- Then select **New Project** to open a new PRIME project.

OR

- Click the **Project** icon on the top left-hand side of the Main User Interface,
- From the drop-down menu, select **New** to open a new PRIME project.333

Note: PRIME supports projects on a network drive but PRIME does NOT support search capabilities for projects over the network due to the Microsoft Search API

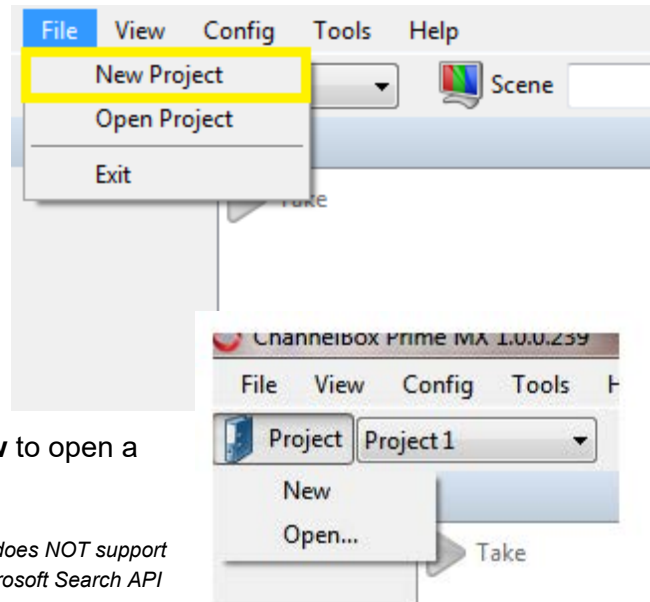



Opening a Pre Existing Project

To open a preexisting project:


- From the Main User Interface, select **File** from the top menu bar.
- Then select **Open Project** to open a new PRIME project.

OR


- Click the **Project** icon on the top left hand side of the Main User Interface,
- Select **Open** to open a preexisting project.

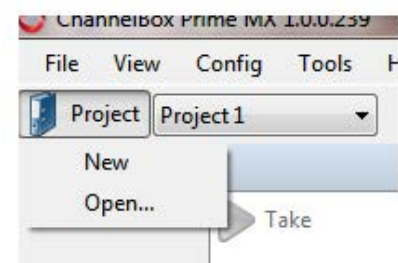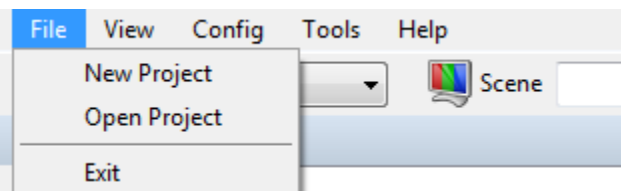

- The **Select Project** panel will be displayed. From here, the user may navigate to the preexisting project and open it.

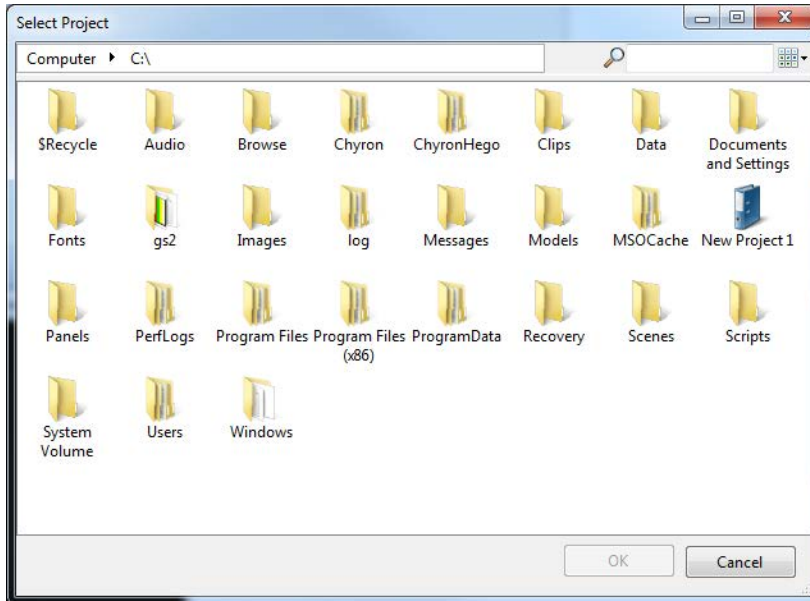


When saving scenes, if PRIME sees assets from folders outside the project PRIME, PRIME will prompt users to import the asset.

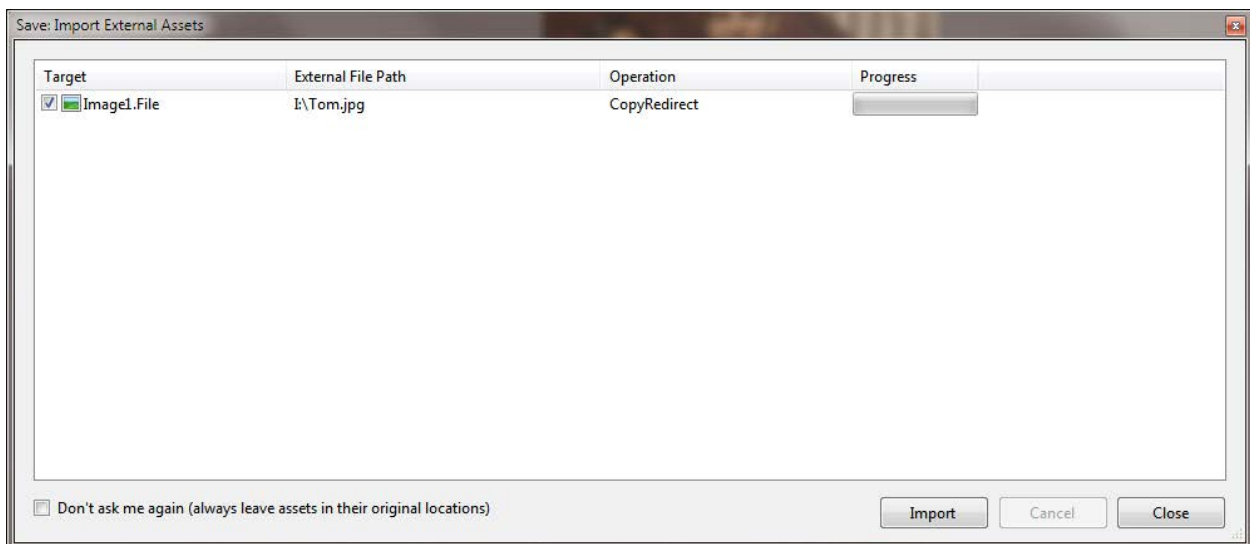

Removing a Project

- From the **Designer** User Interface, click the “Project” icon from the top menu bar.
- Then select **Remove Project** to Remove PRIME project. This will NOT delete the project.
-

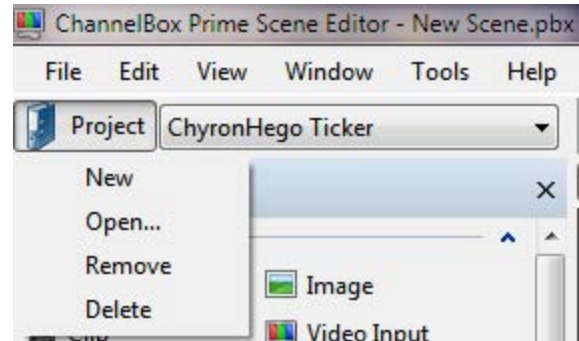


Deleting a Preexisting Project

- Select **Delete Project** to Delete PRIME project and all the files associated with it.

Editing a Pre Existing Project


- From the **Designer** User Interface, click the menu File-Edit Current Project
- This allows you to edit the Project Description, Project Parameters, Expressions, Conditions and C# code.

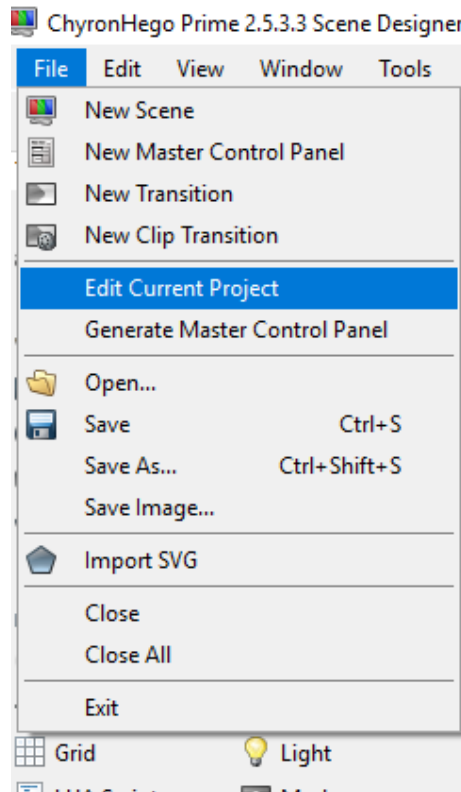


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Layouts


PRIME uses Windows docking panes which allows users to add/remove/position and size all of the available window panes. Layouts can be saved and loaded.

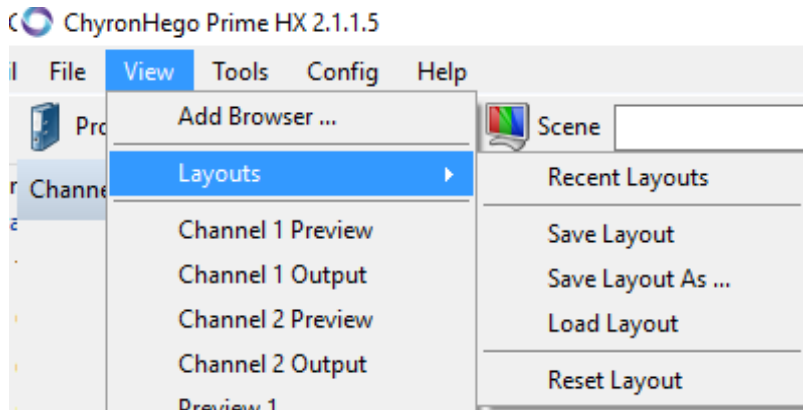


There is also a quick layout loader on the left top of the main Runtime user interface:



In the Prime settings dialog, there is a setting to automatically save the changes that are made to the layout. This setting is available in both the main application form and the designer form. This is not a global setting. If the “**Auto Save Layout**” checkbox is checked in the main application form, there is no guarantee it will be checked in the designer form and vice versa.

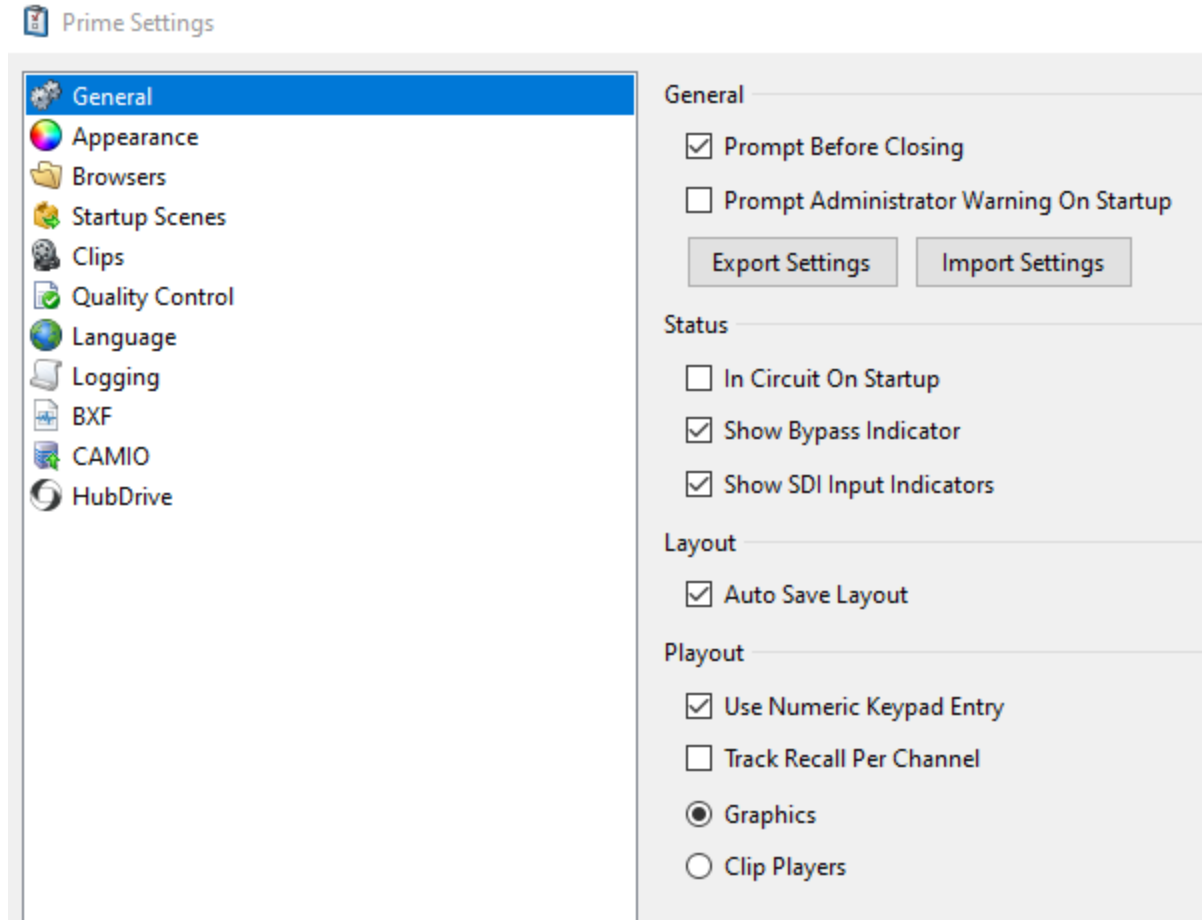


This layout shows 2 graphic channels with previews, 4 clip players and a playlist

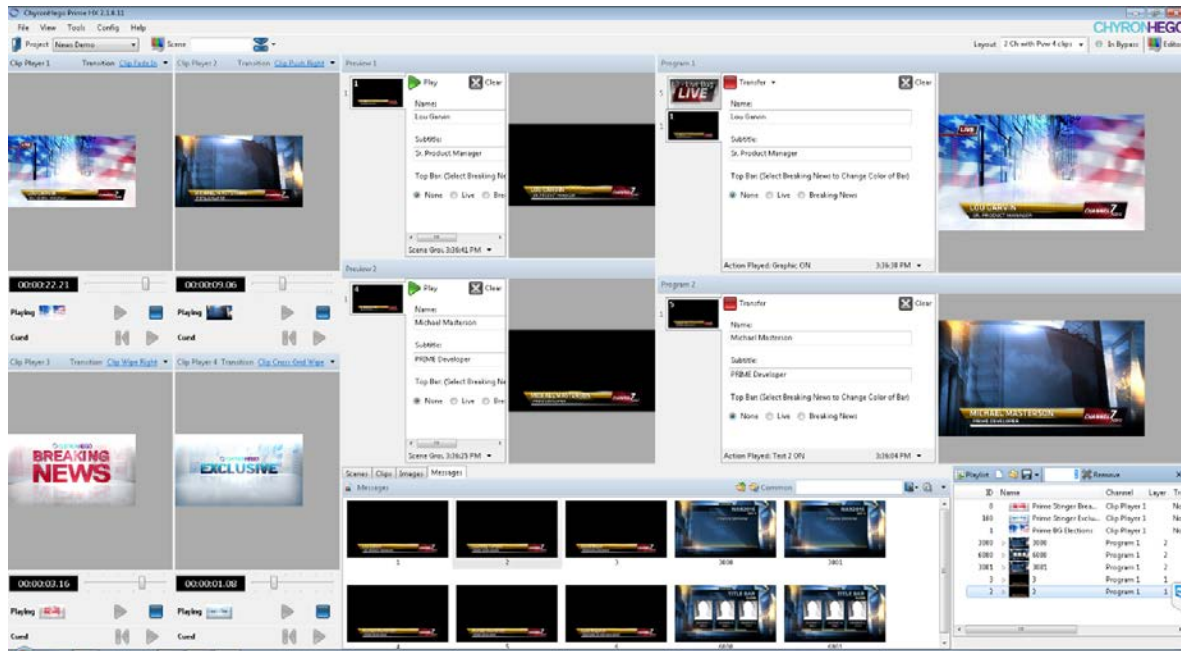

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

This layout shows 6 clip players and a take list

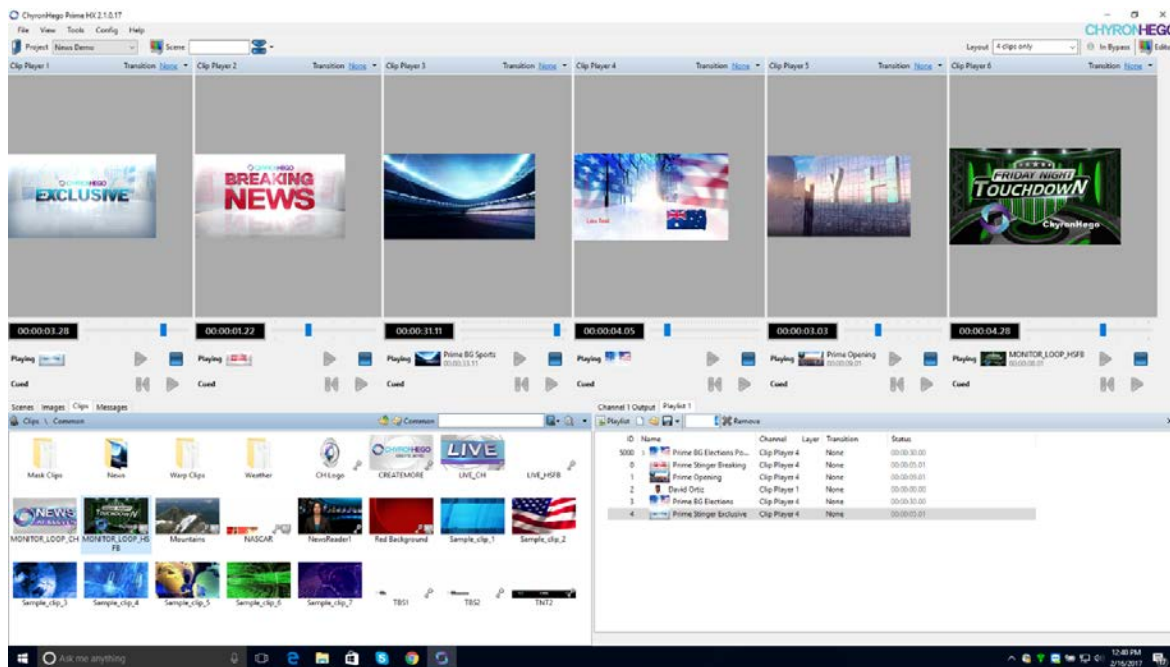

Tools


Application Scripting

Application scripts run the entire time the application is open as opposed to Scene Scripting which only runs while that scene is open. The scripting window language is C# and has access to the entire PRIME API. Refer to the separate document “API Scripting Guide”.

Zip & Unzipping Assets

Prime offers a built in Asset Viewer to view assets per scene or per project. Select column heading (File, Type, Size Modified, Parent) to sort assets by ascending or descending order.

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

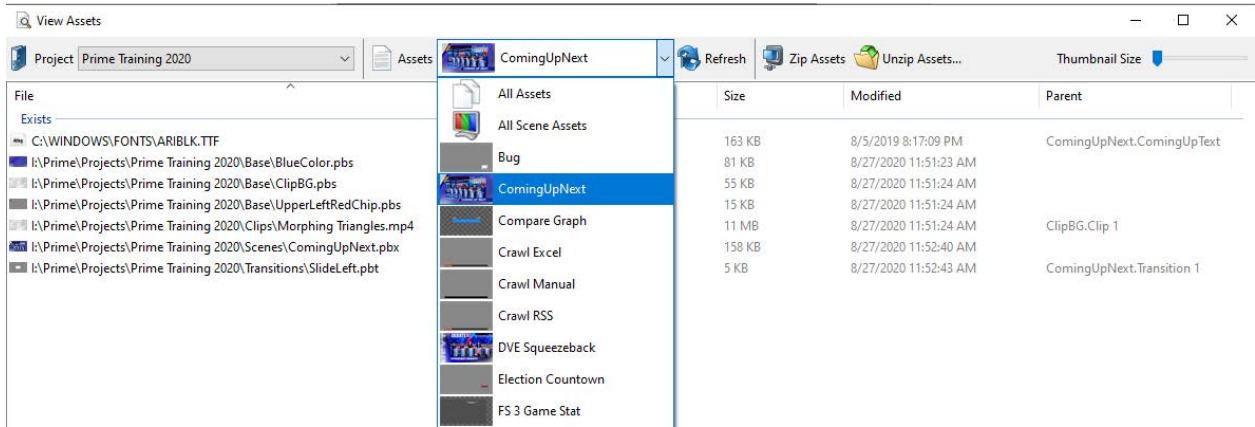

Additionally, users can zip or unzip these assets using the built in Zip/Unzip tool.

Settings

The various configuration settings determine the behavior and appearance of PRIME. To access:


In the top menu bar, select **Config** and select the desired item to configure:

- **Settings**
- **Automation**
- **Devices**
- **Keyboard Shortcuts**
- **Playout Configuration**
- **Content Distribution**
- **Import Configs**
- **Export Configs**


Settings Configuration

Selecting **Settings** from the **Config** drop down menu allows the user to change various aspects of PRIME.

General

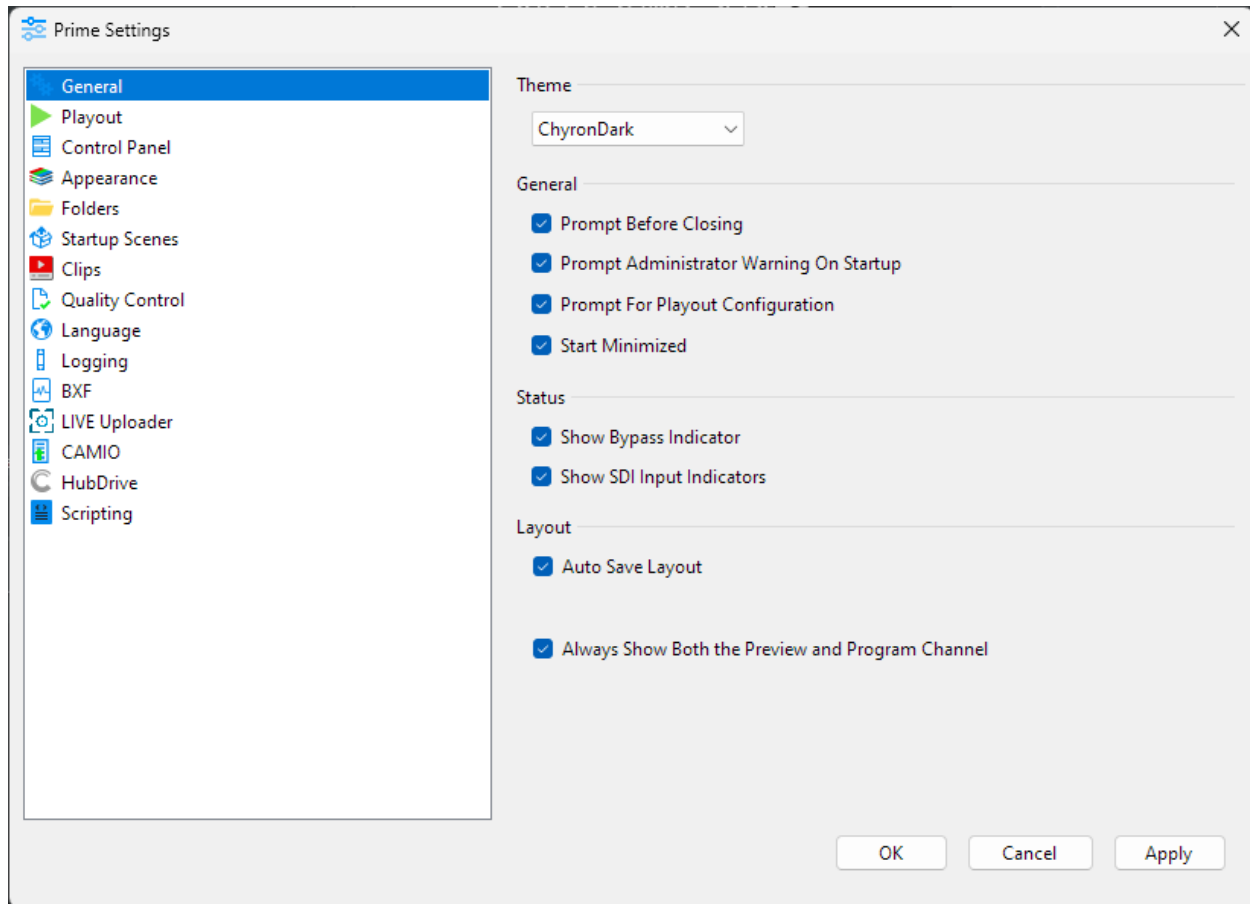

- **Prompt Before Closing** – If checked, PRIME will confirm with the user whether or not PRIME is to be closed.
- **Prompt Administrator Warning on Startup** – To run out of process VB,JScripits Prime needs to be started with Administrator privileges.
- **Import/Export Settings** – Allows users to export a series of settings into a zip file allowing users to import them on a target machine elsewhere. Any files in the source machines “Common” folder will be extracted to the target machines “Common Folder” only if a Common folder is defined on the target machine.

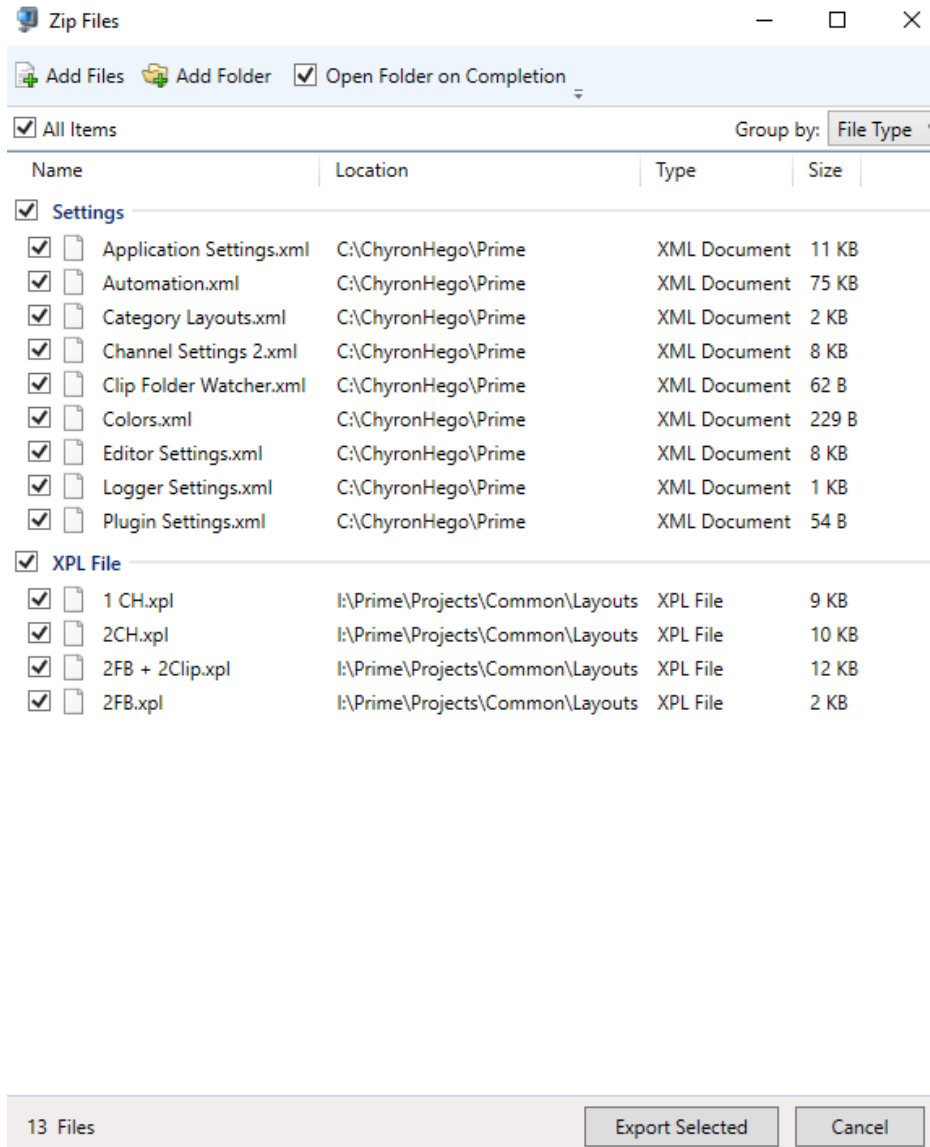

- **Status** – if the system is run in downstream mode and an external bypass panel is installed, the following options may be configured
 - **Show Bypass Indicator** – Show an icon on the main Runtime user interface toolbar
 - **Show SDI input Indicator** - Show an icon on the main Runtime user interface toolbar


- **Layouts - Auto Save Layout** option automatically saves the changes that are made to the layout

- **Always Show Both the Preview and Program Channel**
 - If setting is checked, both preview and program channel controls will be made visible when a channel is activated.

 - If setting is not checked, only the visible section of the channel will be activated and the user can hide either or both.

*Enabled (checked) by Default.

Playout

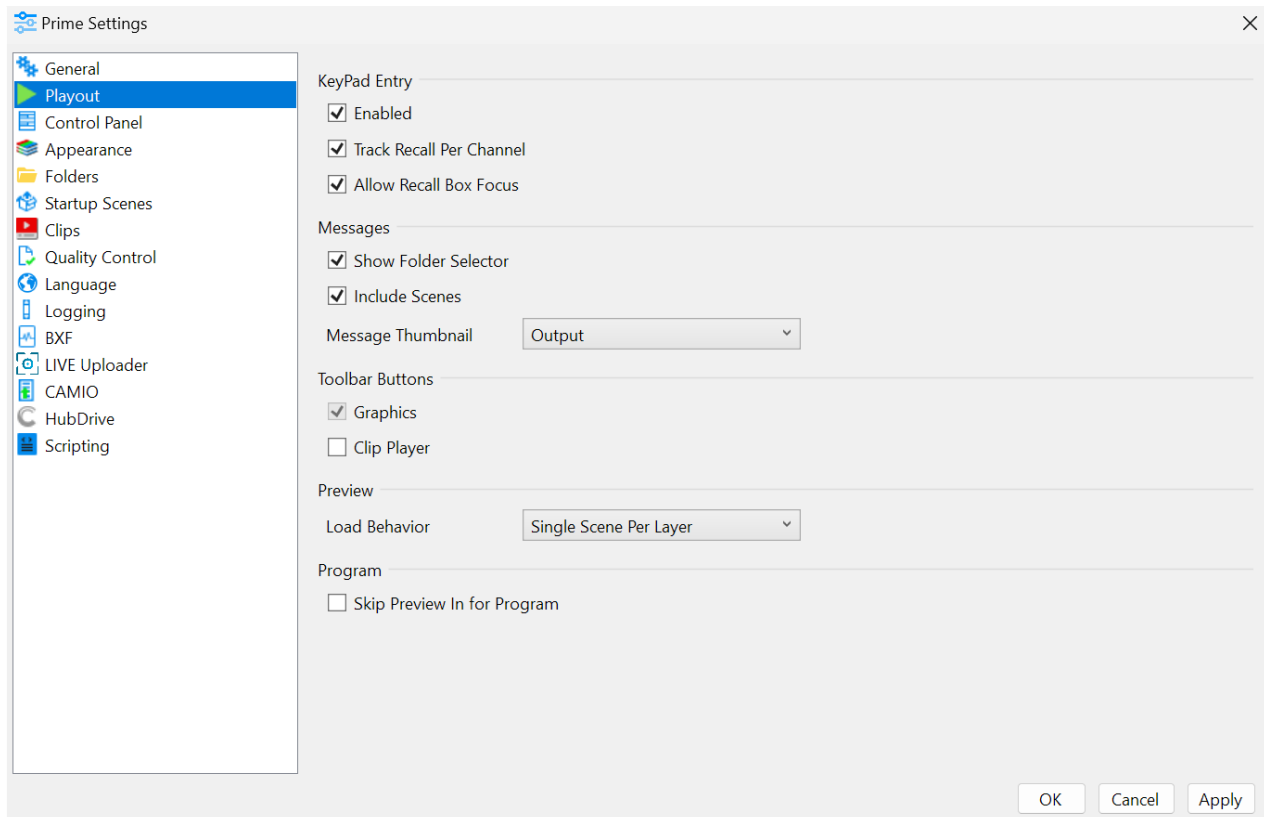

Numeric Keypad Entry

When **Numeric Keypad Entry** is enabled numeric and alphanumeric values can be applied to the keypad entry field in the Runtime interface.



Users can use Numeric Keypad playout mode for either Clips or Graphics. For Graphics the order of precedence will be: Scenes then Messages. Channel selectors will appear on the main toolbar. Shortcut keys can be assigned to select the “Active” channel. See *Shortcut Key Manager* for configured shortcut keys.


Scenes, Messages or Clips will load to the active channel i.e whichever channel has focus. This means that the scene's default Channel will not be honored if the Channel property is set in Designer. *See Scene Properties for more information*

Track Recall Per Channel - (applicable when operating PRIME with a multi channel graphics or clip player system). When selected, the Keypad Entry field will populate the text value of the next numeric or alphanumeric graphic (scene, message) or clip for the selected channel. When unchecked, multiple channels share the same value for recall.


Allow Recall Box Focus - When checked, operator can tab or mouse click into the recall box to open a scene or message. When unchecked, Recall Box is only accessible via Numpad keys.

Messages


Show Folder Selector - When this is enabled, Messages folder selection will be visible in Prime playout UI.




Click on Messages Icon to add or remove messages folders.



Numeric keypad entry will apply to the selected message folder. Select from drop down to change selected folder.

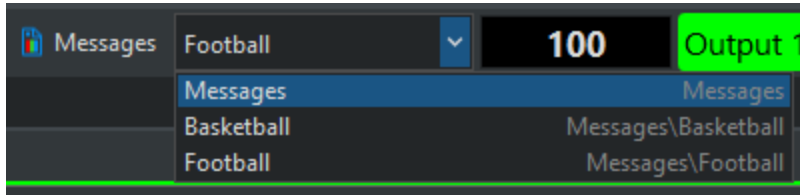

Preview Load Behavior

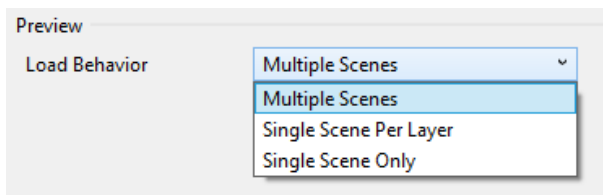

Multiple Scenes: Infinite number of scenes/messages can be loaded in preview regardless of layer assignment.


Single Scene Per Layer: Only one scene per layer can be loaded per preview channel. A scene with the same layer assignment will displace the other.

Single Scene Only: Only one can be loaded in preview regardless of layer assignment.

Skip Preview In for Program - When checked, Preview in Event animations state will be skipped on Program Channel. This results in consistent effect in behavior in case where scene is played directly to Program Channel.

Example use case: In Preview in Event a clip is set to cue frame 30, at its revealed state. But when the same scene is played to air, the clip should play from frame zero.

Control Panel

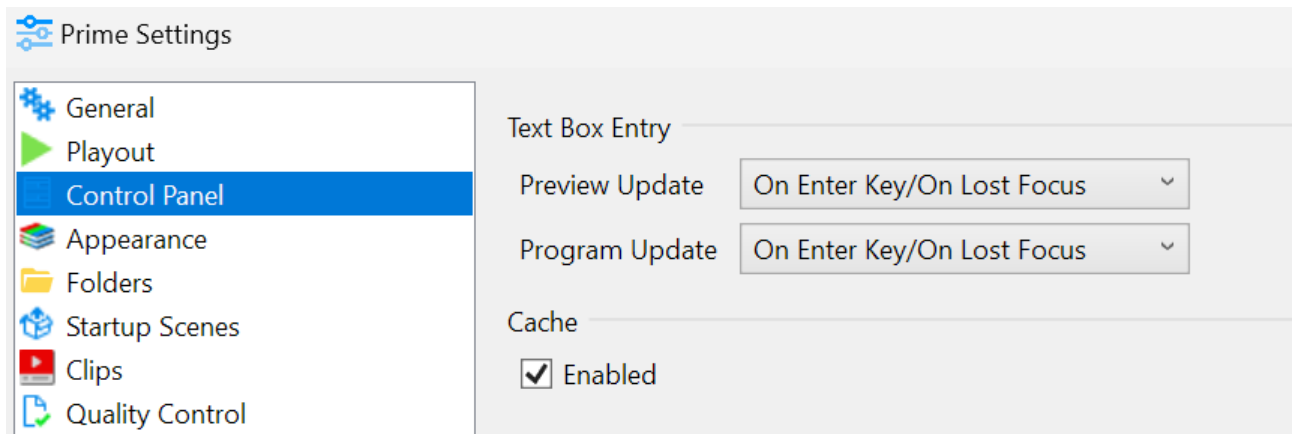


Cache

When checked, an initial load of a Control Panel will be stored in cache. Any future loads of the control panel will load faster.


*Disabling cache is recommended for any control panel utilizing complex scripting or event triggers on load.

Appearance

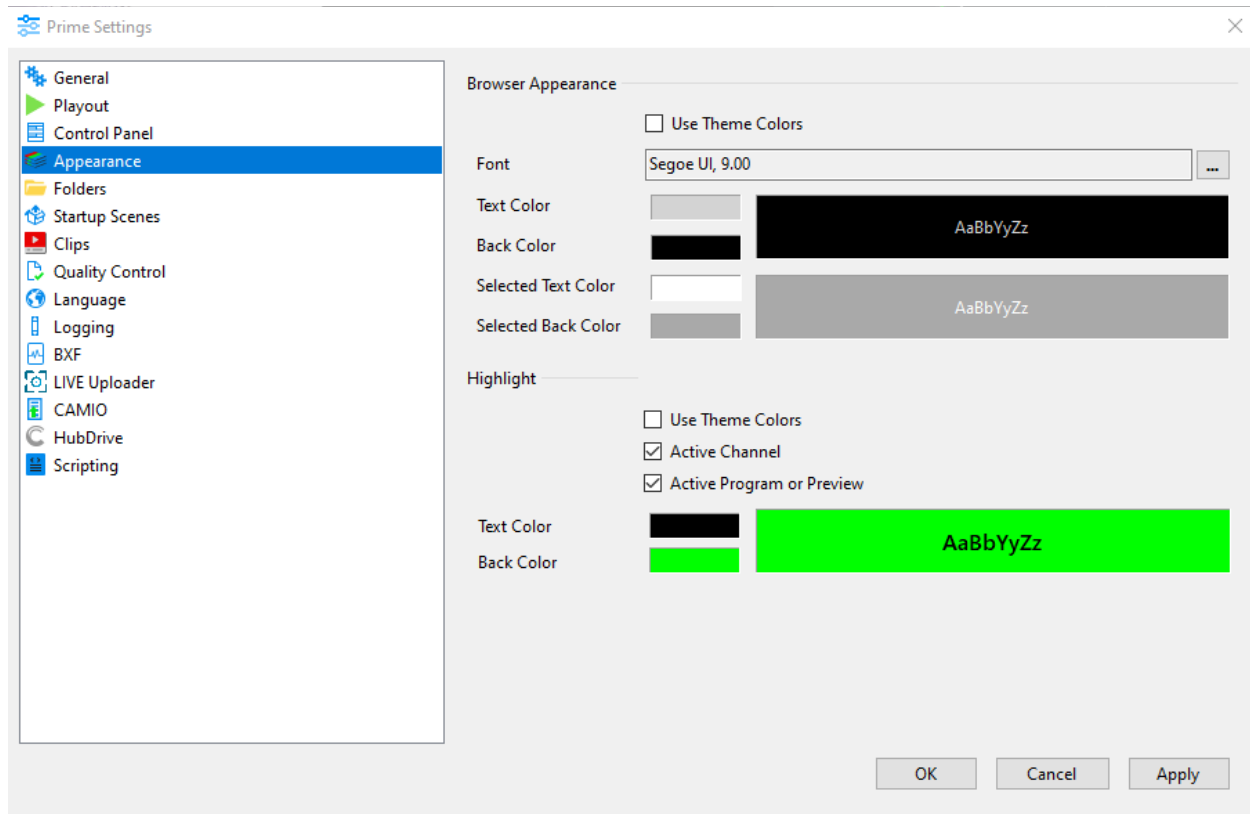


Browser: Allows users to customize the appearance of all browsers in the PRIME application

Highlight: Allows users to customize the appearance of the active channels and active Preview or Program

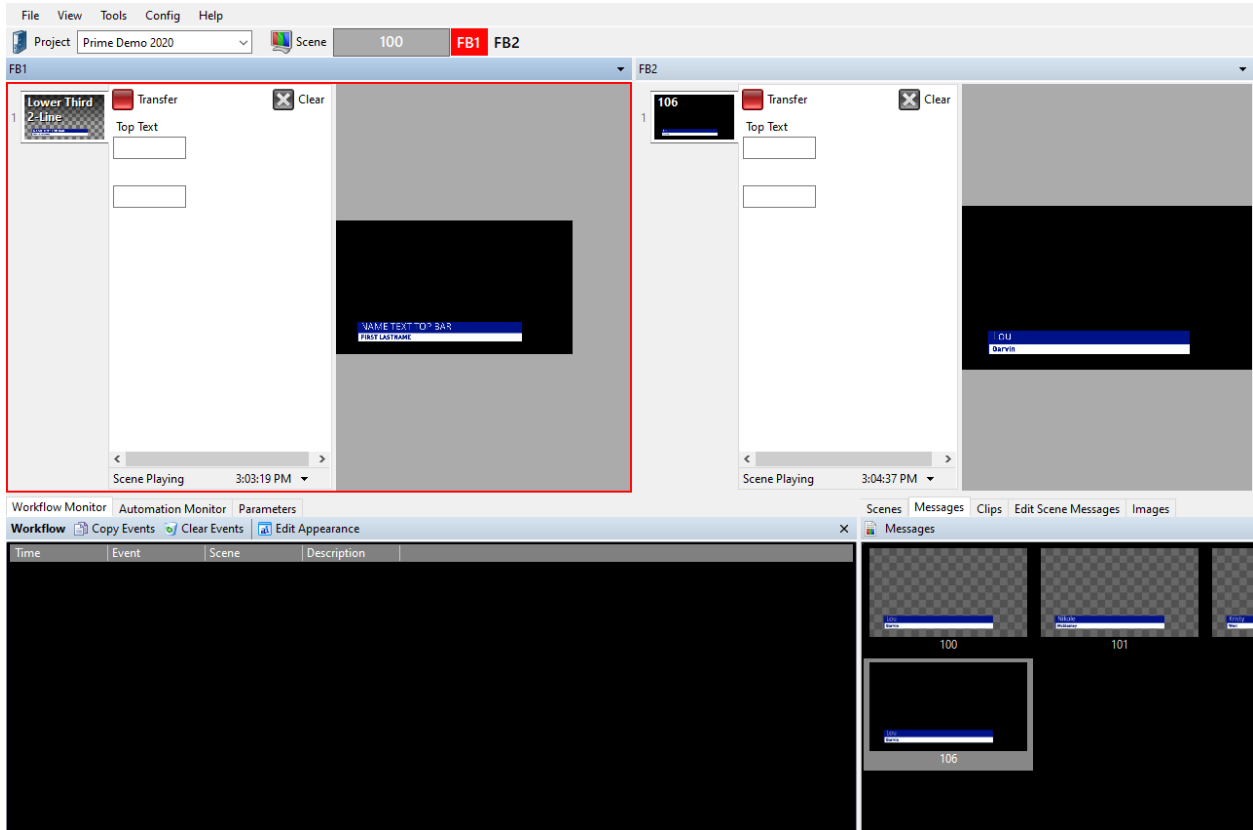

Folders

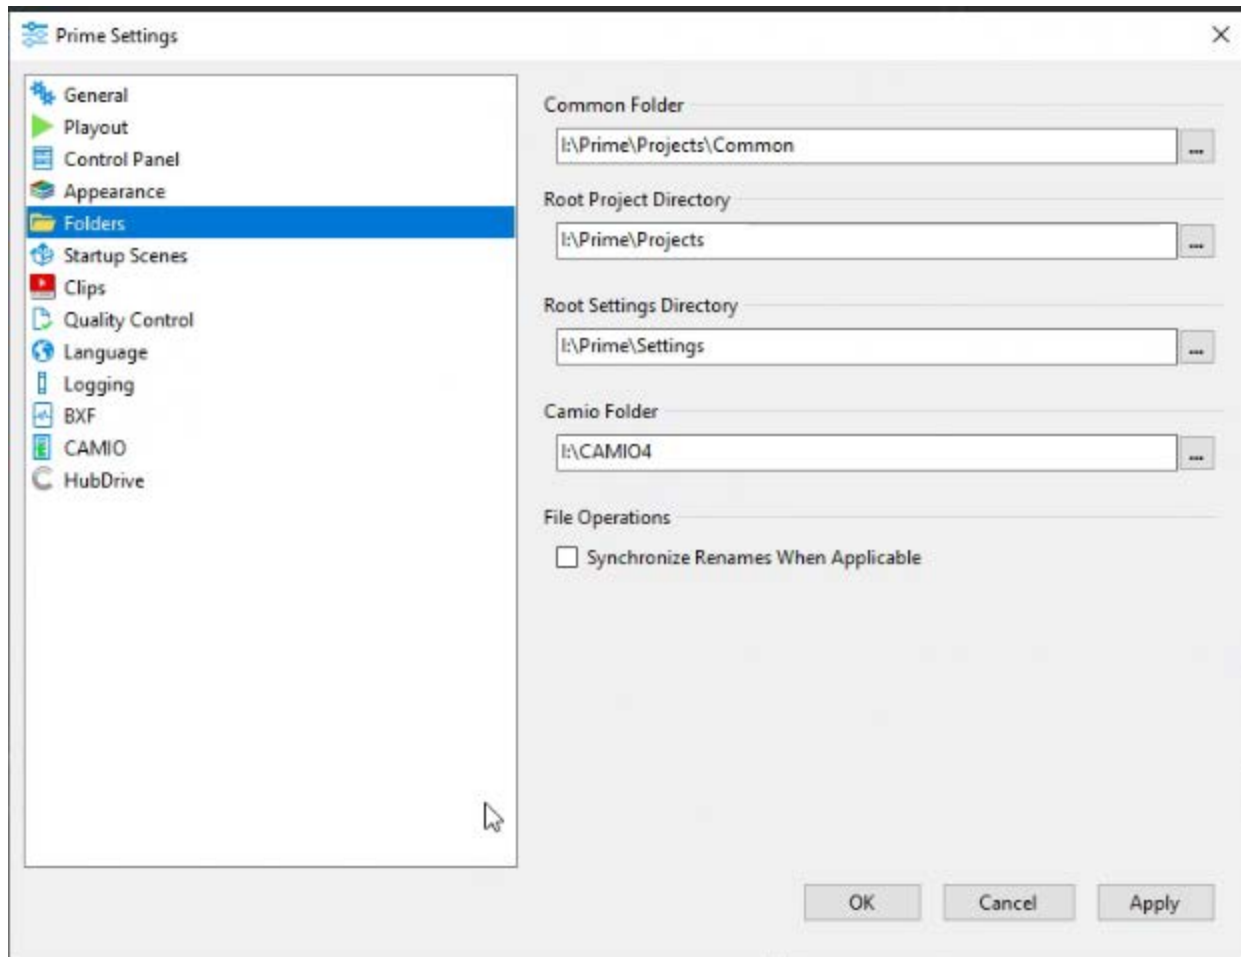


Common Folder – ChyronHego *STRONGLY* suggests the use of a “Common” folder. This stops the need for assets to be stored multiple times in multiple directories.

Root Project Folder- Define the root folder for all your projects.

Each browser has a shortcut button to browse the common folder.

Root Settings Folder - Defines the folder location of all the configurations, layouts etc. This is tied to the startup screen.

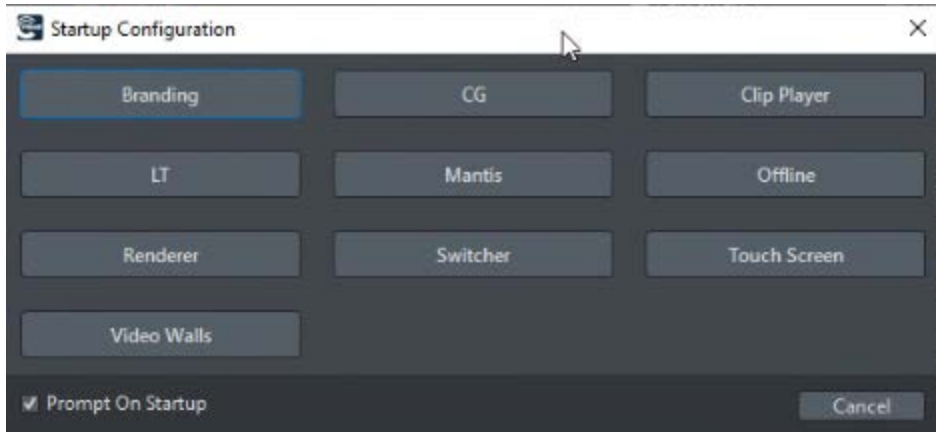



CAMIO Folder - This folder location will contain all the Project folders. These Project folders contain their associated assets (MOS Messages, CRD files and replaceable assets).

The PRIME messages in the "Message" folder can be called up in PRIME playout.

***** **IMPORTANT** *****

The CAMIO Context **MUST** match the PROJECT Name.


Example: Context: News 5PM PRIME Project: News 5PM

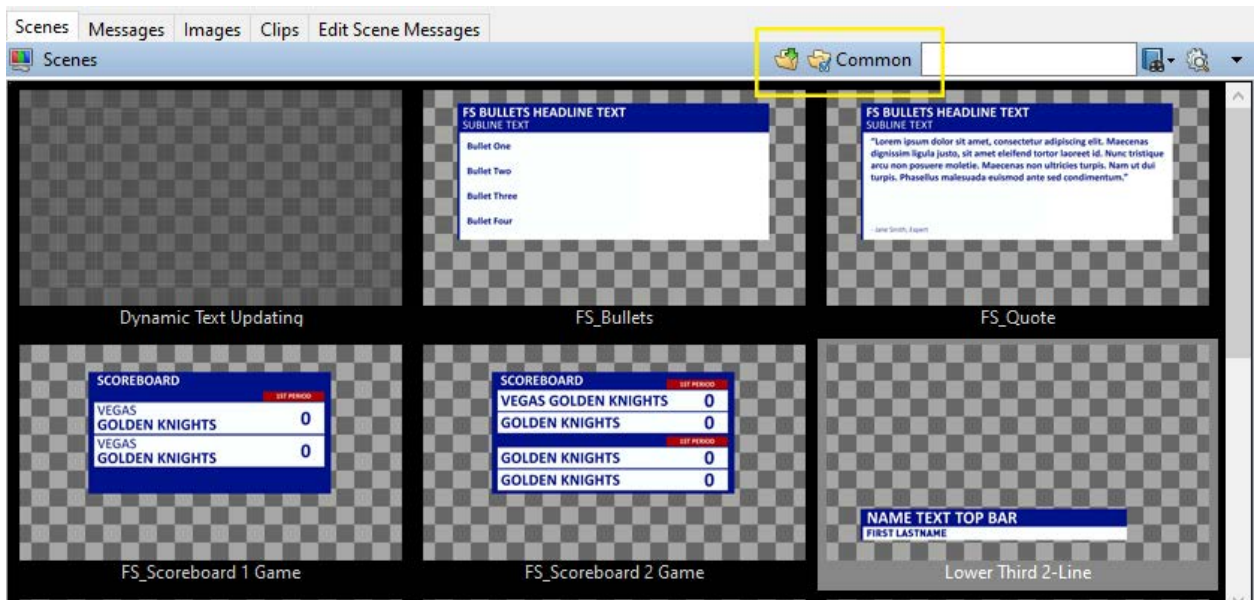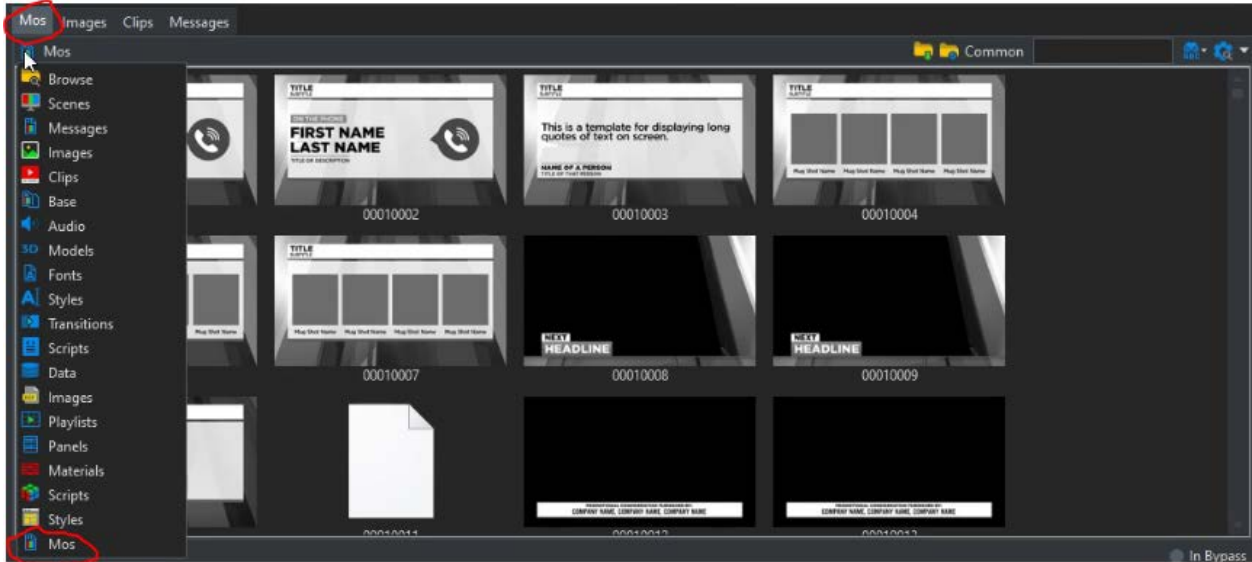


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Startup Scenes

Scenes can be set to load or play when the PRIME application starts.

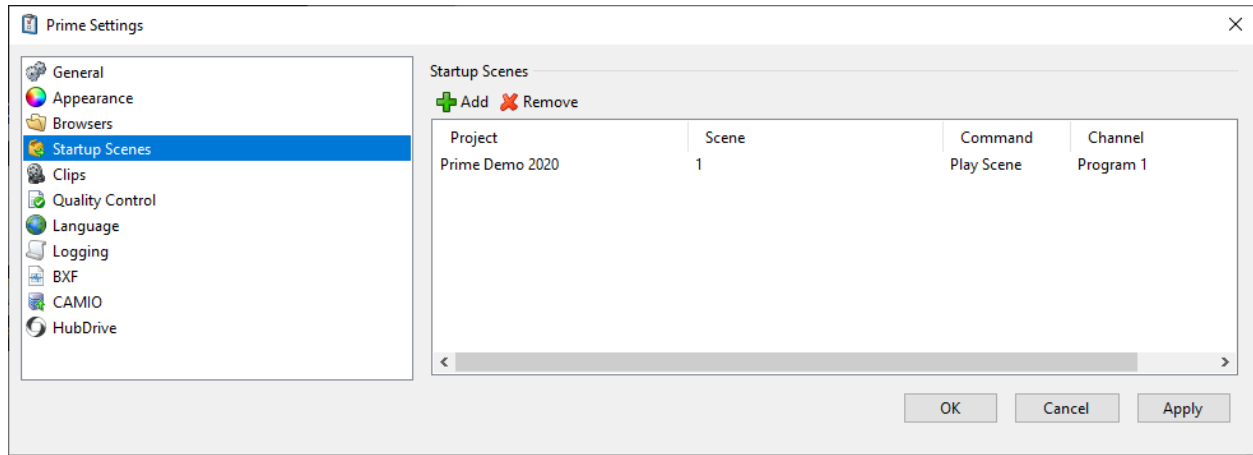

Clips

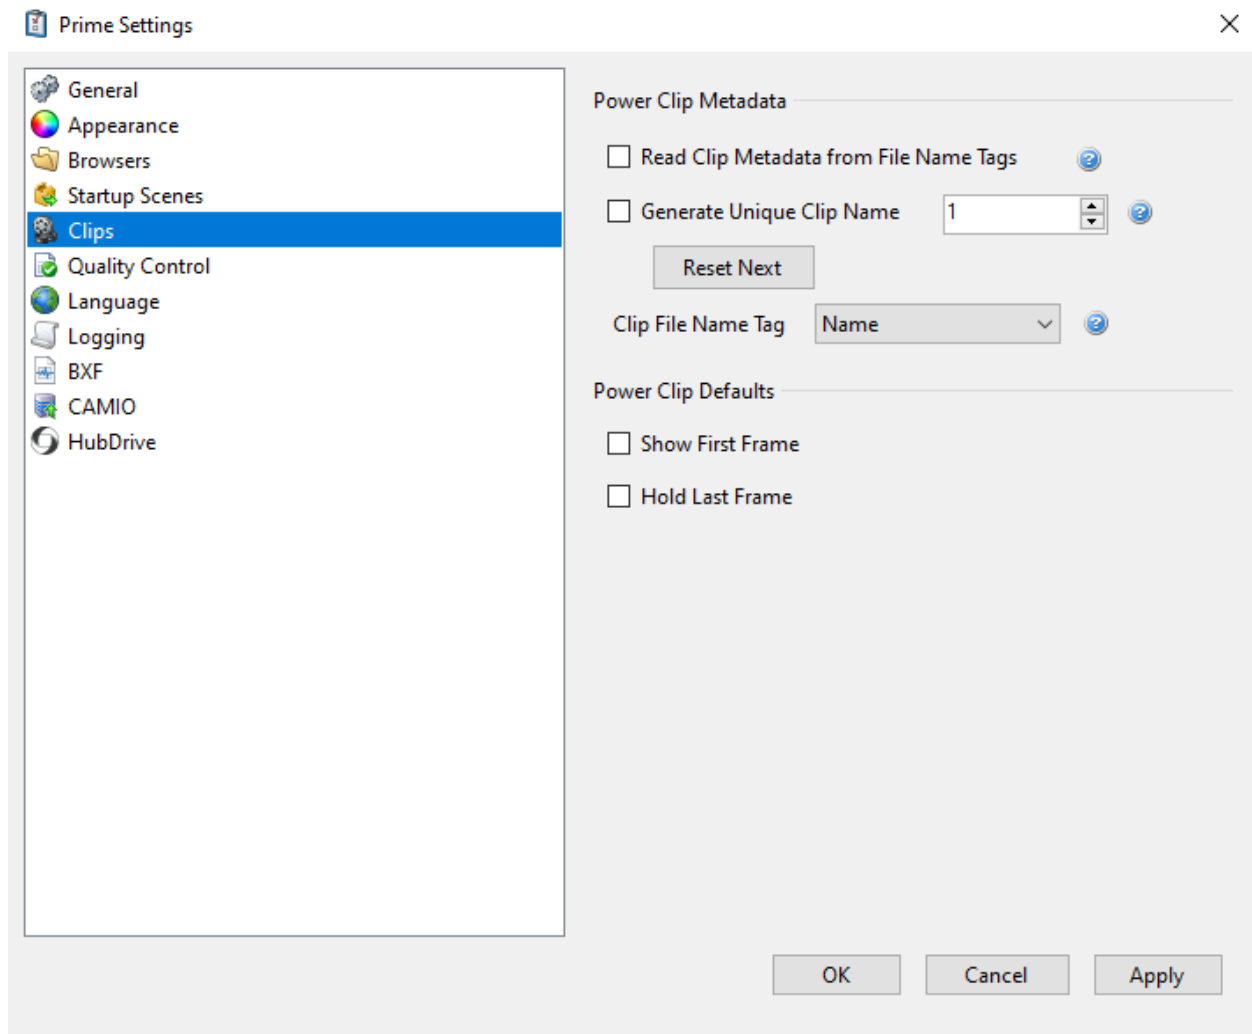

Read Clip Metadata from file Name Tags:

PRIME has the ability to add metadata to the associated clip metadata file when the clip is imported using the “Folder Watcher” application. The metadata is part of the command line

i Supported File Name Tags

When this option is enabled, metadata will be read from the clip file name.


Metadata tags take the form:

TAG1-VALUE1_TAG2-VALUE2 ...

Supported Tags:



- Group: GP, text value
- Name: NA, text value.
- Description: DS, text value.
- Keywords: KW, text value.
- Expiration: EX, text value
- Hold Last Frame: HF, integer value: 0 disabled, 1 enabled.
- Camio Virtual Channel: CVC, text value.
- Capture Frame: TF, integer value.
- Loop In: LI, integer value.
- Loop Out: LO, integer value.
- Loop Enabled: LE, integer value: 0 disabled, 1 enabled.

Quality Control

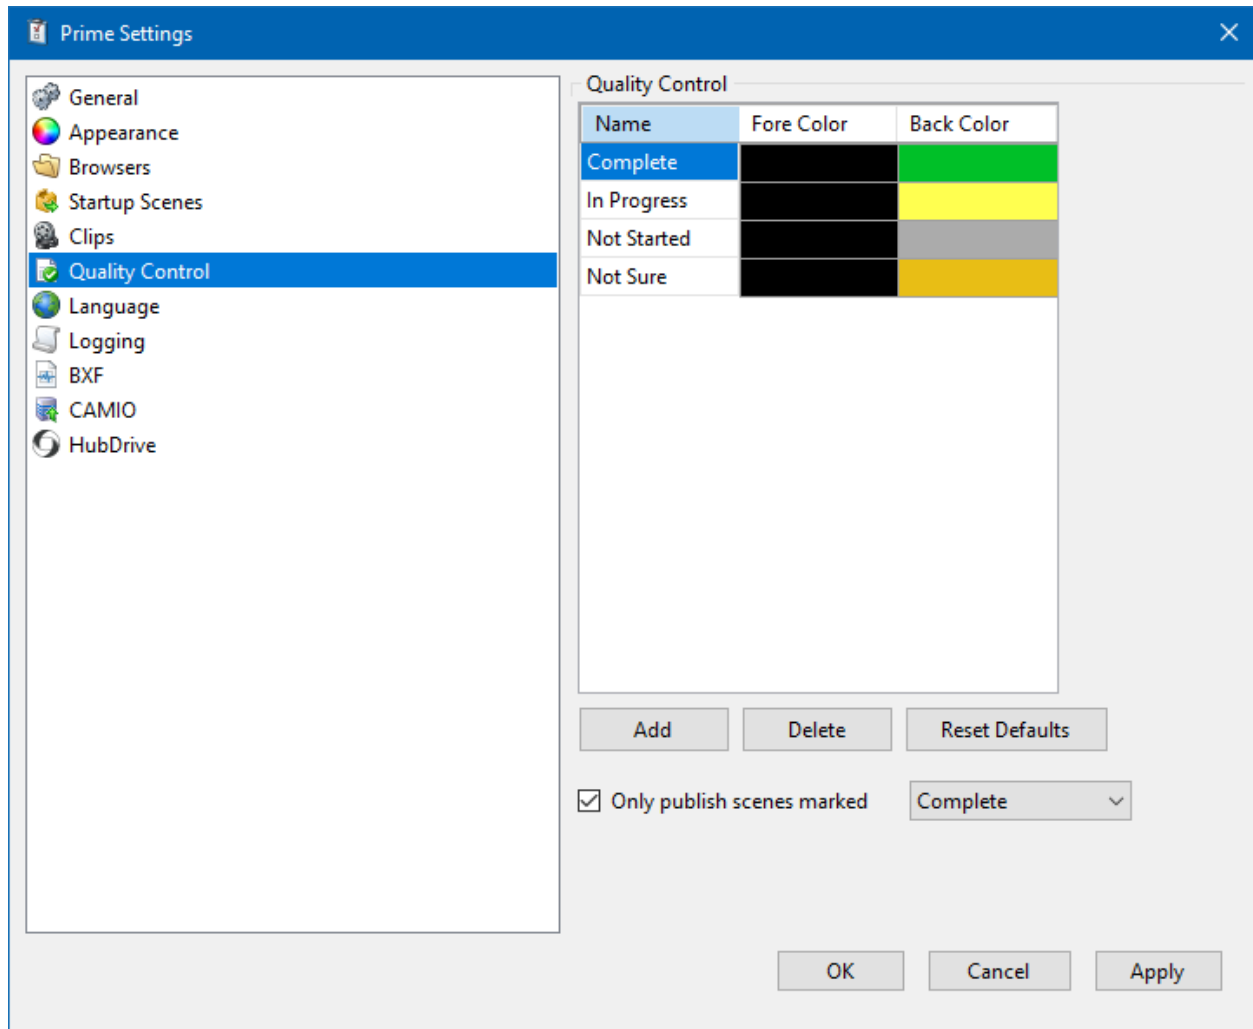


The **Quality Control** settings allow the user to define **Quality Control** states.” These allow users to see the state of scenes. This comes into play in the distribution of scenes and their associated assets. See **Asset Viewer** also.

To view **Quality Control** states, select **Details View** from the **Scene Browser**. This allows the **Quality Control** field to appear in the scene list. From there, a state may be set as defined in the **Quality Control Settings** section.

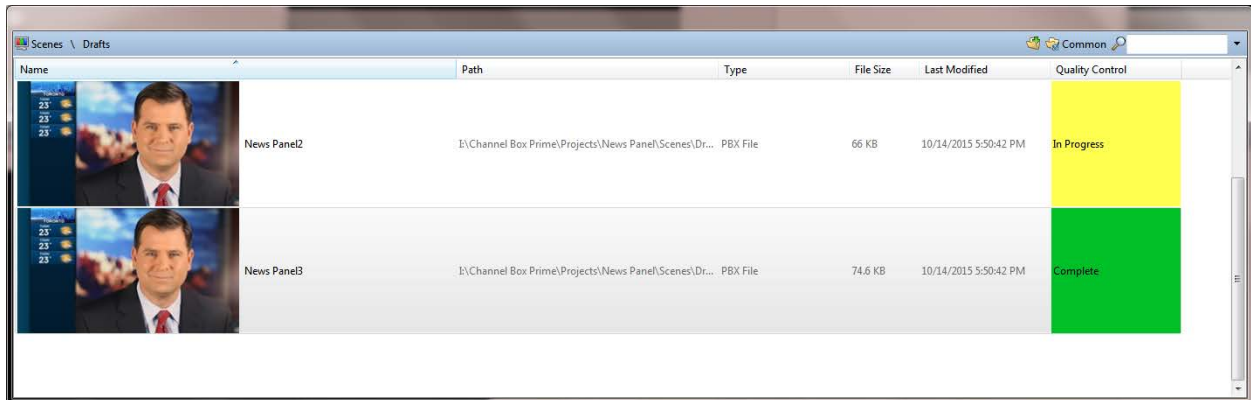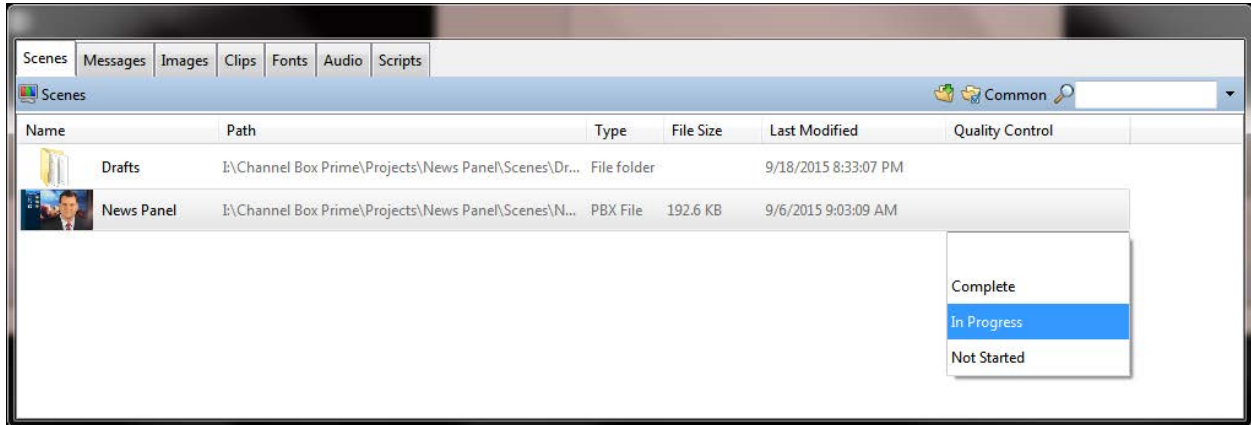


In the **Icon** view, the quality control may be viewed, but not edited.

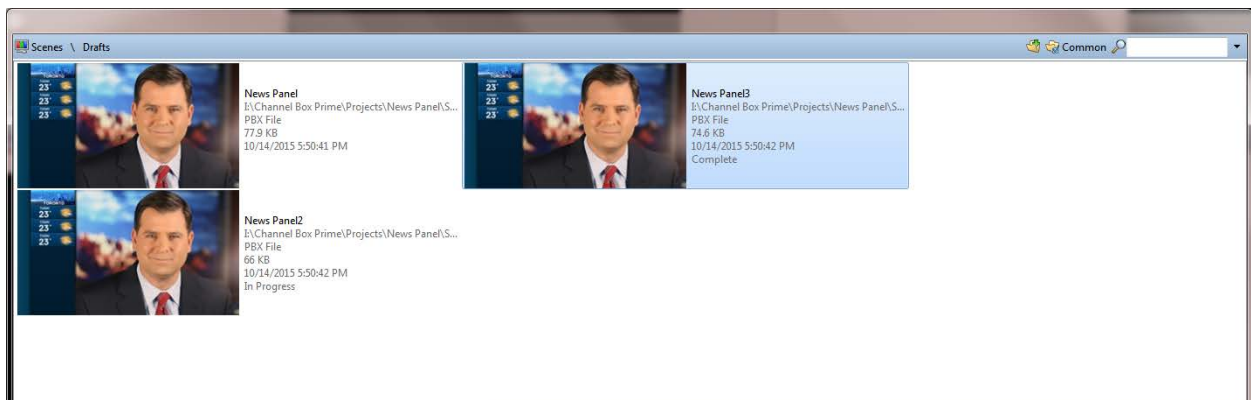


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Language

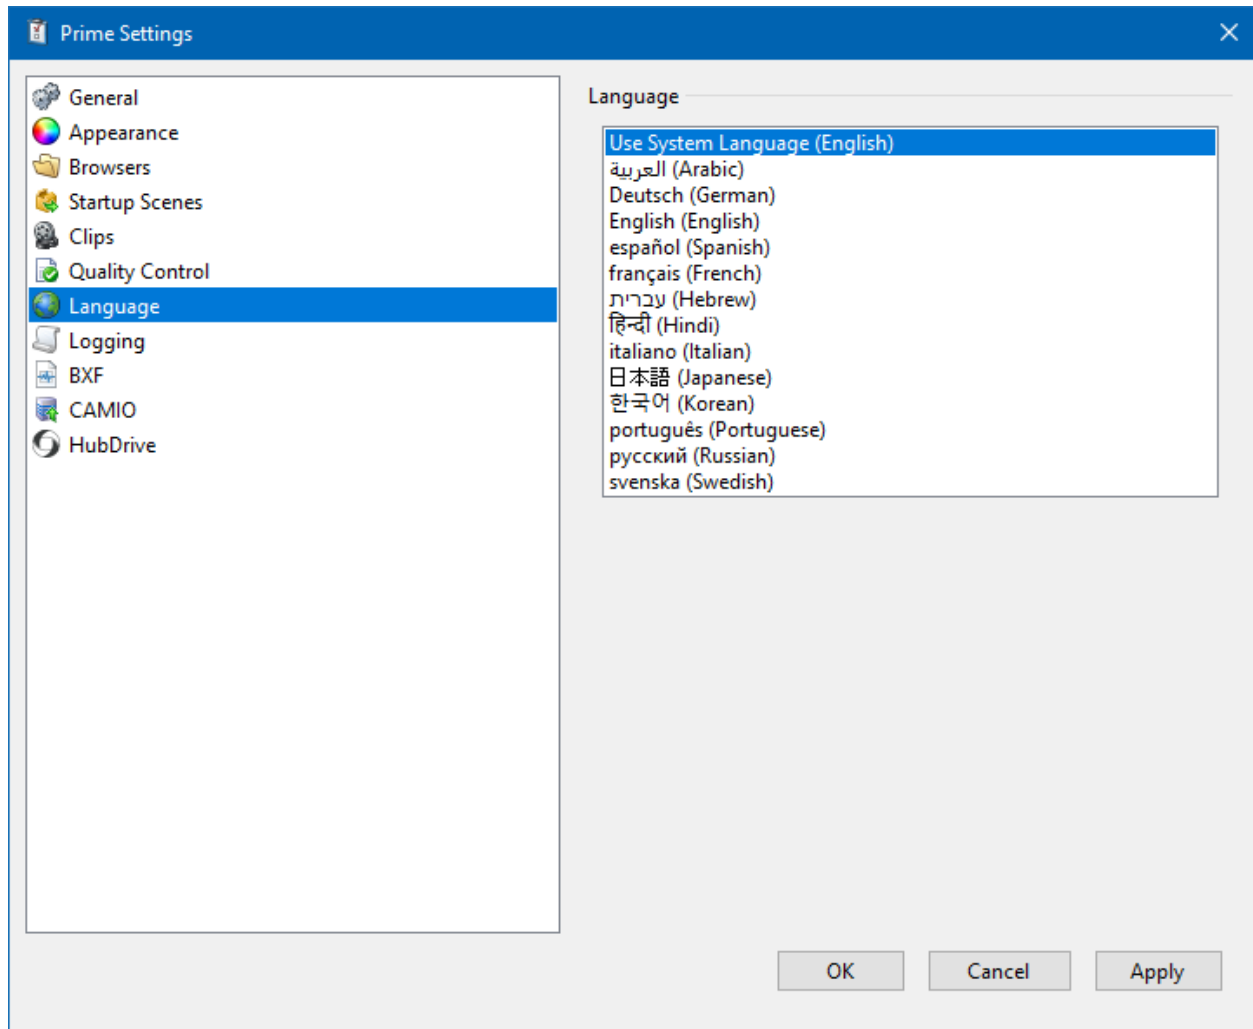


Language Settings allow the user to select from the available list of languages. Once a language is selected, the PRIME User Interface will switch languages.



Not all language translations are guaranteed to be accurate

Logging

Logging Settings enable the user to configure logging for the main PRIME application.

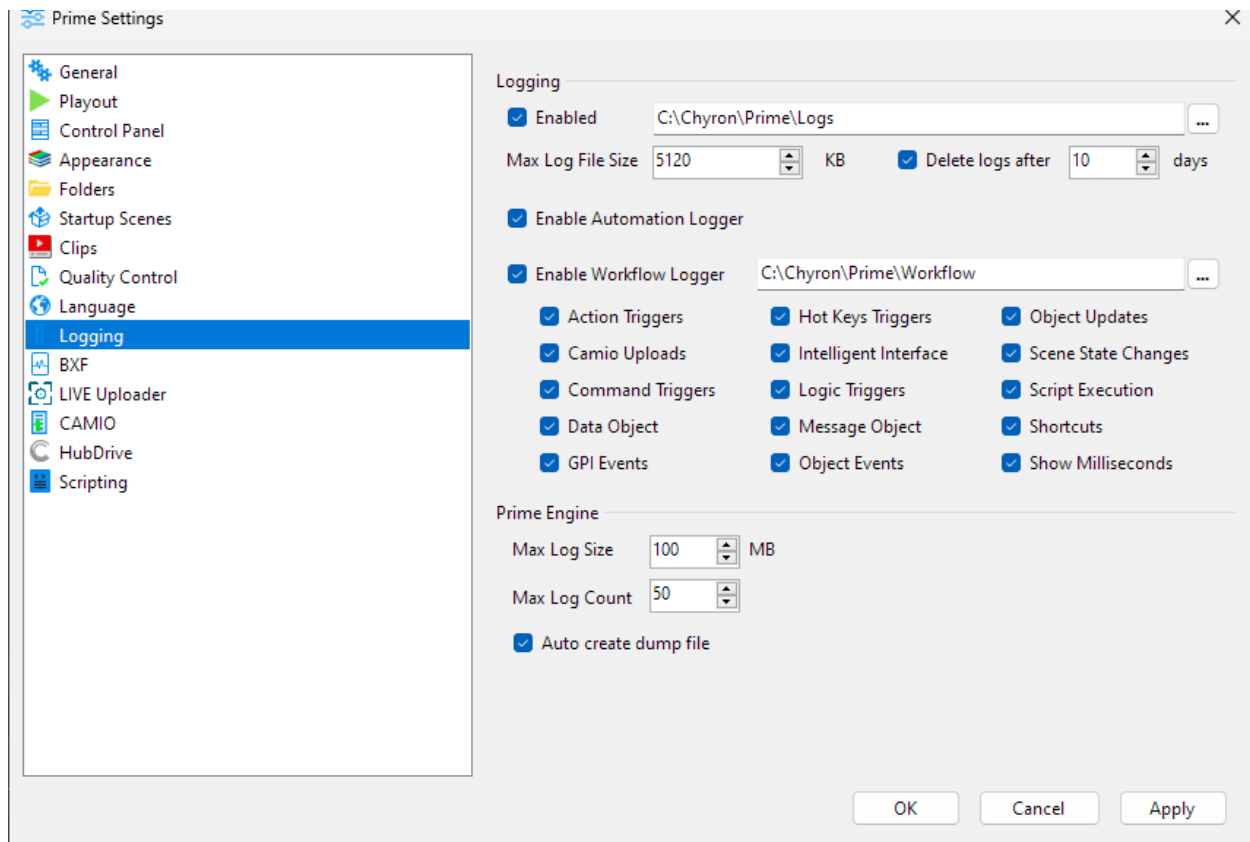

The **Workflow Logger** will log specific events in the application

The workflow logging is useful for viewing the order of events that happen with a scene or scenes. The workflow log window can be viewed from the main Runtime user interface.


You can select which events will be logged in the Workflow Monitor.


Time	Event	Scene	Description
2:00:24 PM	ActionPlayed	FS - Fullscreen Image	Panel ON
2:00:26 PM	SceneState	FS - Fullscreen Image	Loaded
2:00:26 PM	SceneState	FS - Fullscreen Image	Playing
2:00:29 PM	ObjectEvent	FS - Fullscreen Image	Button 1.Click event raised
2:00:29 PM	ActionPlayed	FS - Fullscreen Image	Panel ON
2:00:29 PM	ActionPlayed	FS - Fullscreen Image	Flares
2:00:32 PM	ObjectEvent	FS - Fullscreen Image	Button 2.Click event raised
2:00:32 PM	ActionPlayed	FS - Fullscreen Image	Graphic OFF

Only check the **Auto create dump file** checkbox when asked to do so by ChyronHego service.

The Scene Logger


Scenes have a logger built into them. Clicking the log bar will show the current Scene Logger:

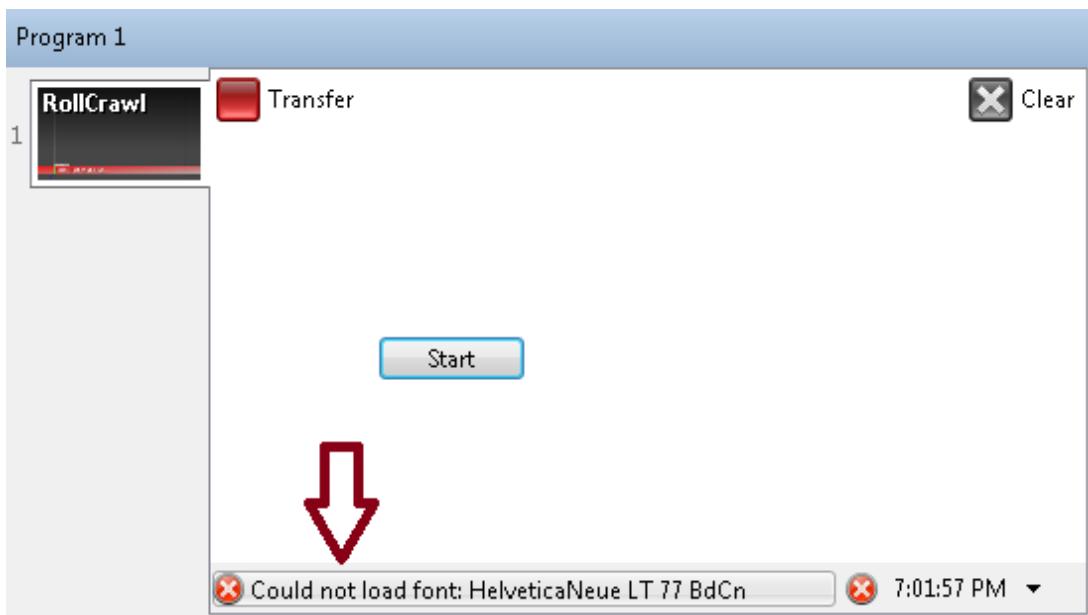

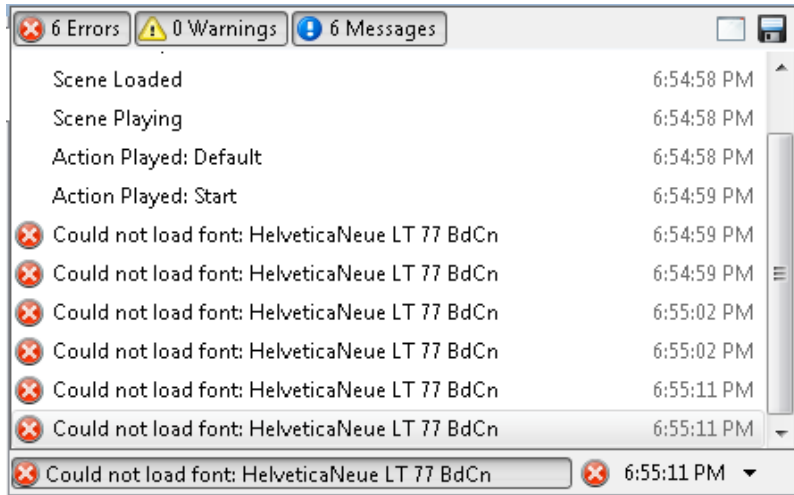


BXF

See the section that explains the BXF object as a scene resource

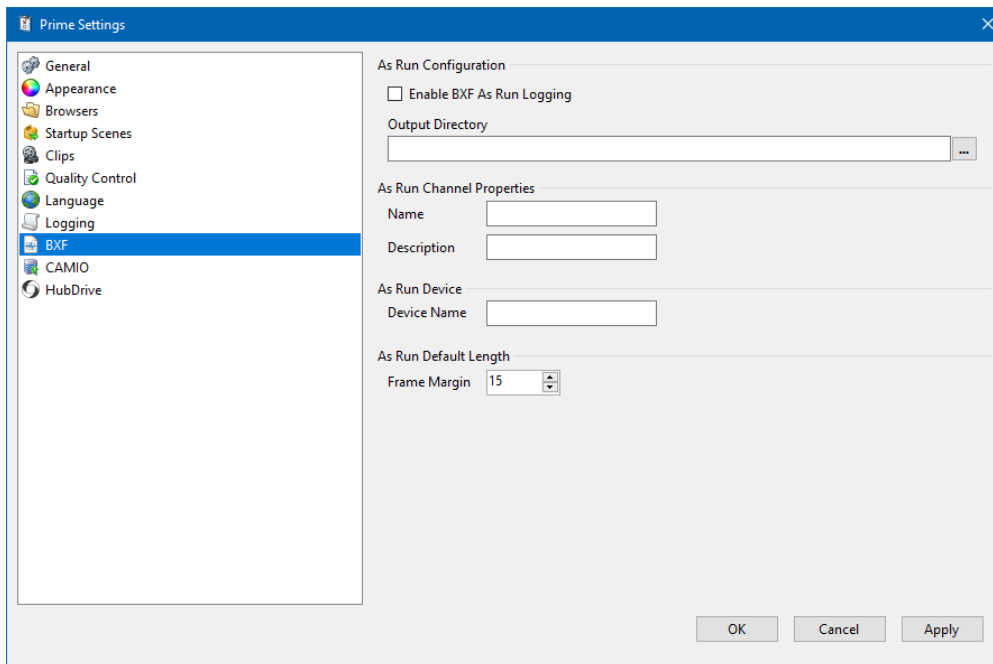


CAMIO


Apply your CAMIO Server settings here.

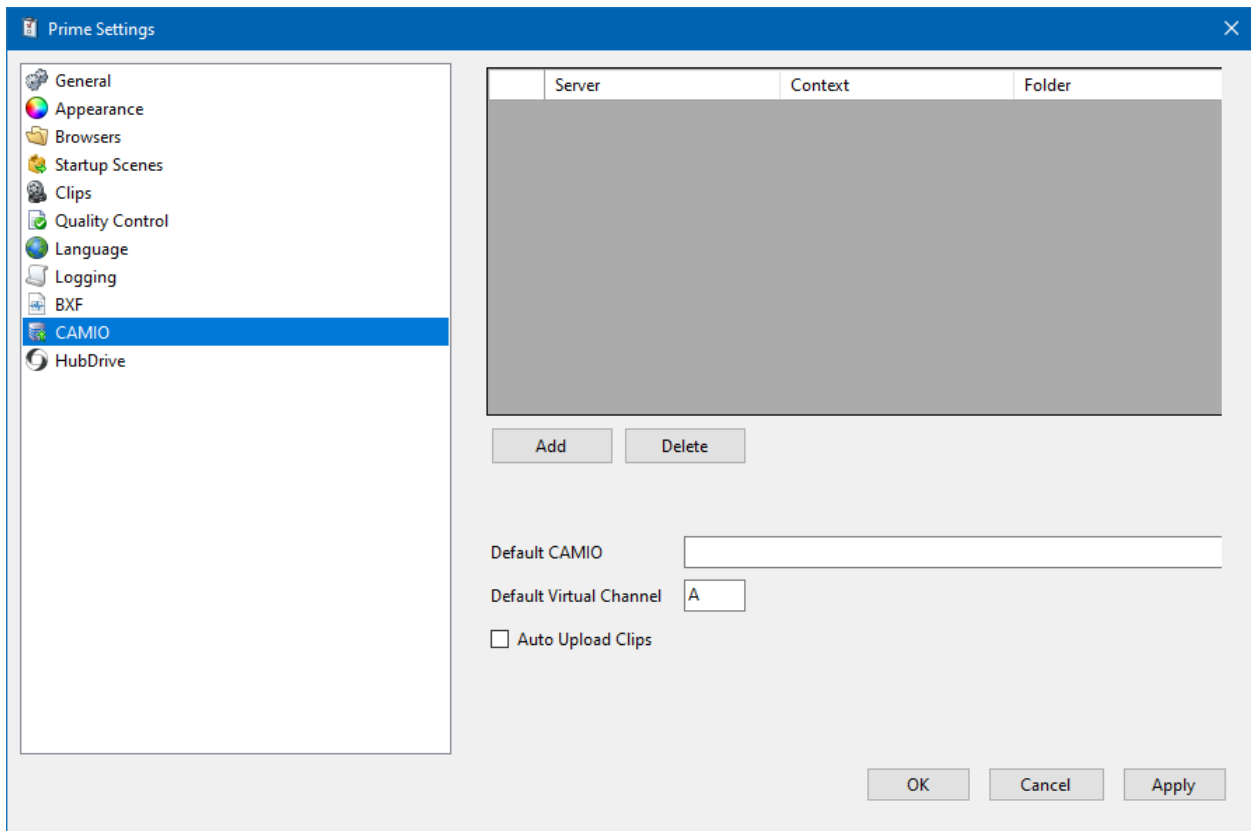

Hub Drive

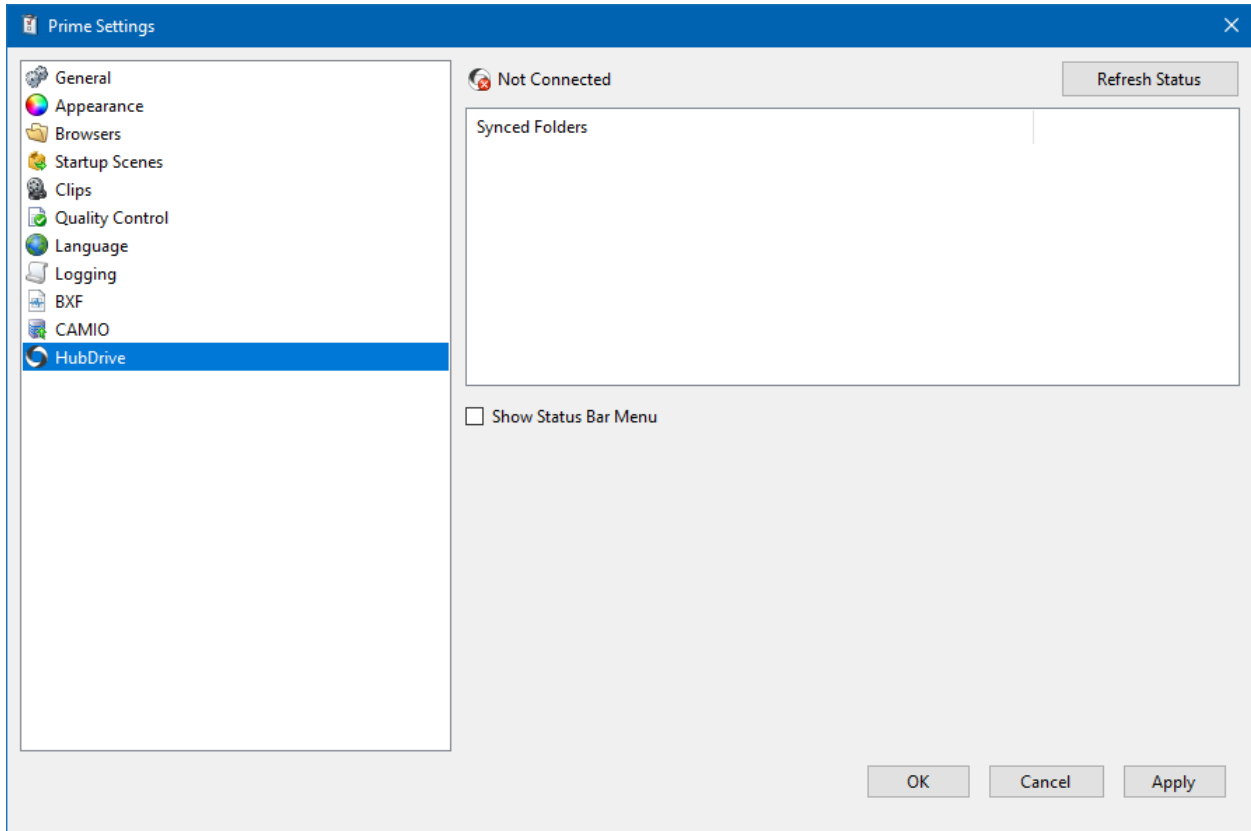

Scripting

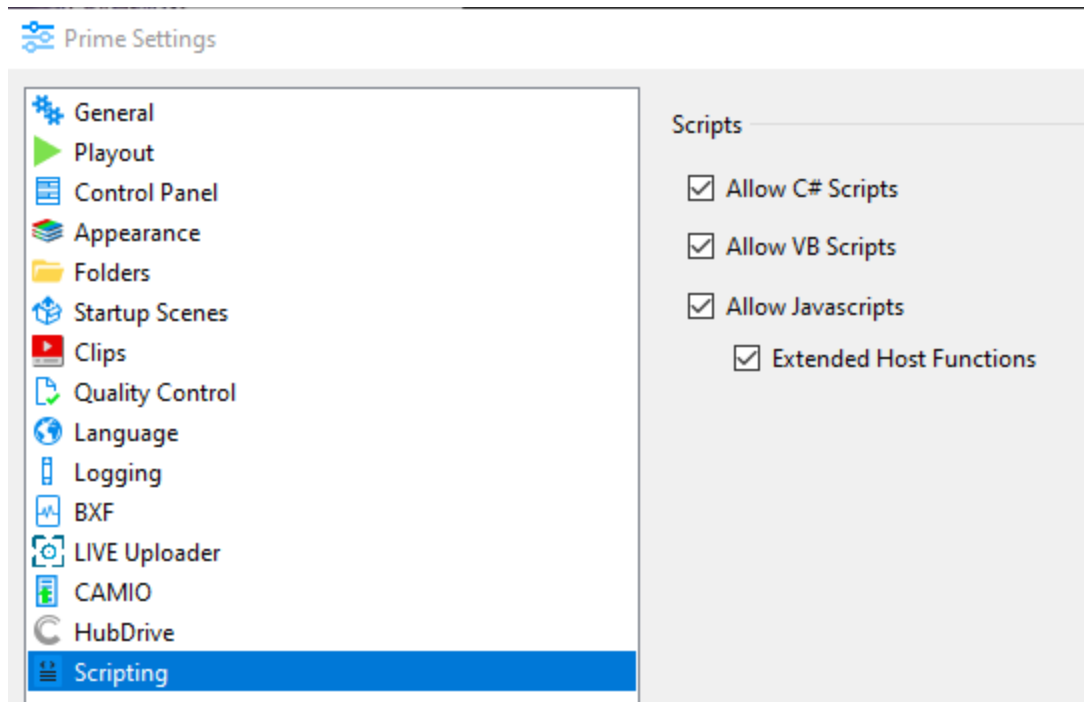

These settings allow Prime to function in Sandbox mode when unchecked. In addition it allows users to preview animations, without running/executing scripts. If a scene is loaded that utilizes a script, and Prime script settings is disabled, then Prime will log warning that the script can not compile and execute.

Hardware/Playout Configuration

Refer to the separate [PRIME_Playout Configuration Guide](#)

Subchannels


Subchannels are smaller defined areas of a larger output channel. Each subchannel is defined by its resolution and its “X” and “Y” position within the larger output channel.

Each subchannel can have its own preview and output in the main Runtime user interface.

You can have independent scene browsers for each subchannel that only shows scenes with the exact same resolution as the subchannel itself to ensure only scenes designed for that resolution can be played.

Replaceables-Automation ID's

Object properties that can be “Replaced” by automation are added to this list. A Node in the Scene tree “Resources” section will display the “Replaceables Automation ID Editor”. Objects are required to be exposed in the Replaceable Editor for Update In/Out to execute; including for manual playback. Add items here

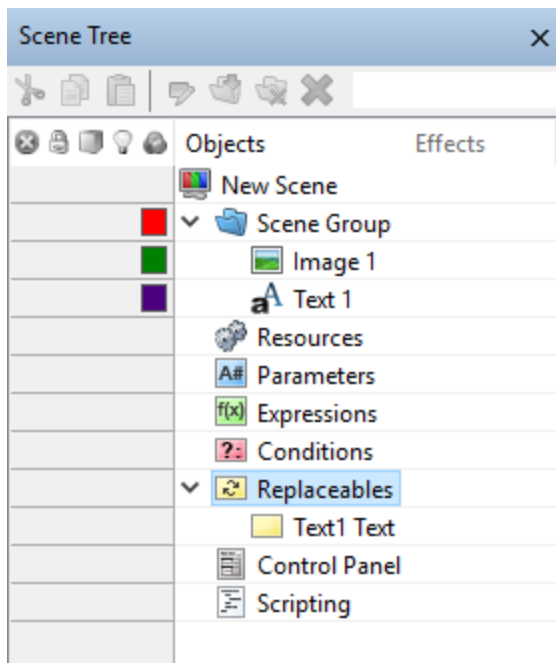

Configuration


Automation Configuration is documented in the [“PRIME Automation Guide.”](#)

Preparing the Scene for Automation (The Replaceables-Automation List)


Commands that update scene objects can be connected in the following manner:

- By the scene Object name
- By the Control Panel name
- By the ID name from the automation list

Scene Object Name: The name of the object from the Scene Tree



Control Panel Name: The name of the control Panel from the Control Panel section of the Scene Tree



Replaceables-Automation List: The name of the ID from the Automation ID Editor

ID	Description	Bindings	Order	Auto Erase	External Update	Character Limit
Name Text	Enter a persons name	a Name.Text	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Title Text	Enter a persons title	a Title.Text	2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	
Logo File	Choose a logo	Logo.File	3	<input type="checkbox"/>	<input checked="" type="checkbox"/>	

- **Id:** This is the ID automation will use to identify this item.
- **Description:** This is a user-friendly description and is also used in *the NRS Plugin (LUCI) as the label for the replaceable item.*
- **Bindings:** Object(s) Properties bound
- **Order:** Used by legacy commands that expect the data in the order they are given in the command. The “W” command is a good example: W\100\200\A\B\C\
- **Auto Erase:** Should the default value of this property be erased when viewed or loaded.
- **External Update:** When checked, the replaceable is marked to send and receive X and R commands respectively. Each replaceable is identified by its Bindings descriptor. Referencing the picture above a X command would be sent as follows

*X\1****\Locator L3\Name.Text\Title.Text\Logo.File*

The automation system would respond with an R Command

R\1\Melville, NY\Joe Smith\Smith_Joe.jpg


See the [Prime Automation Guide](#) for more.

- **Character Limit:** Enforce a maximum number of characters when applying data supplied to this replaceable. For example, with a character limit of 5 a

replaceable that received the value "ChyronHego" would only be updated with the truncated value "Chyro"

To enter items into the Automation List, drag any property or keyframe into the list. Each item in the list can be bound to multiple properties.

To get a keyframe into the list drag the keyframe from the Keyframe property window NOT the keyframe from within the Timeline.

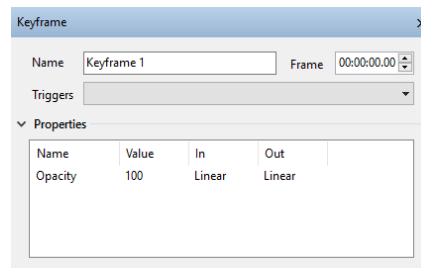

Id	Bindings	Order
LIVE	Text1.Text	1
Locator	Text2.Text	2
Opacity	Clip1.Action1.Keyframe1.Opacity	3
FrontFace	Cube1.File	4

In this example, there are two properties bound to ID# 1


The screenshot shows a window titled "Automation ID Editor" with a close button (X) in the top right corner. Below the title bar is a toolbar with a red "X" icon labeled "Remove", and two blue arrows pointing up and down. The main area contains a table with three columns: "Id", "Bindings", and "Order".

Id	Bindings	Order
LIVE	Text1.Text	1
Locator	Text2.Text	2
Opacity	Clip1.Action1.Keyframe1.Opacity	3
FrontFace	Cube1.File	4
1	Image1.File; Image2.File	5

Note: Some scenes may contain Objects and Replaceable IDs that share the same name and are completely unrelated. In this case, the Object name will take precedent when a P/UPDATE command is received.

Devices Configuration

The **Devices Settings** panel provides the ability to add and edit an external device, as well as display a log of device activity once the connection is live. PRIME allows for either a **GPI** or **X-keys** device to be used.

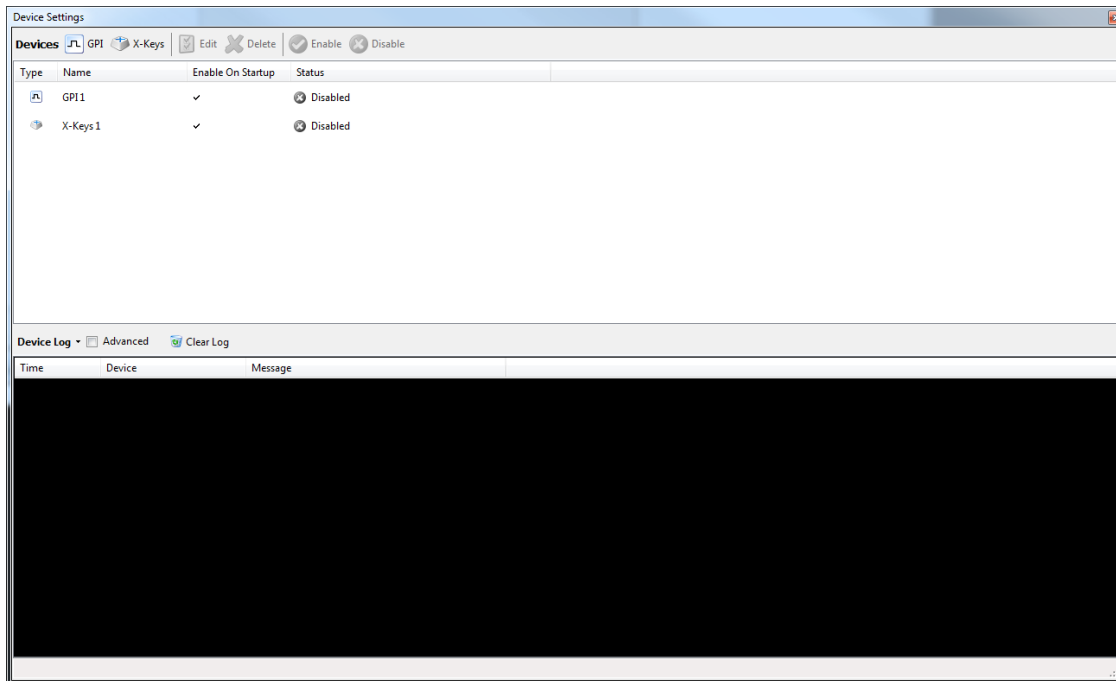

The following parameters are displayed in the **Device Settings** panel:

- **Type** - Displays a **GPI** or **X-Keys** symbol as the type of device.
- **Name** - The name given to the device.
- **Enable on Startup** - If enabled, then the device will be enabled every time that PRIME is started.
- **Status** - Displays **Enabled**, **Disabled** or **Waiting for Connection** as the current status of the device.

To configure the **Automation Log**:

- Select the **Automation Log** drop-down menu to either **Copy** or **Save** the log.
- Enable **Show Data** to show the data from the Automation Log.
- Select **Clear Log** to clear the displayed data from the Automation Log.

- Each log item will display the time of event, the connection in use and a message.

To edit a device setting, do one of the following:

- Click the item in the **Devices** list, and then click the **Edit** icon. The Device panel for the item will open.
- Double-click the item in the **Devices** list. The Device panel for the item will open.
- Right-click the item in the **Devices** list, and then click **Edit** on the drop-down menu. The Device panel for the selected item will open.

To delete a device, do one of the following:

- Click on the item in the **Devices** list, and then click **Delete** icon.
- Right-click the item in the **Devices** list, and then click **Delete** on the drop-down menu.


To enable a device, do one of the following:

- Click on the item in the **Devices** list, and then click **Enable** icon.
- Right-click the item in the **Devices** list, and then click **Enable** on the drop-down menu.

GPI In

Up to 16 GPI inputs may be configured in PRIME. To add a GPI connection:

1. Select the **GPI** icon located on the top toolbar of the **Device Settings** panel.

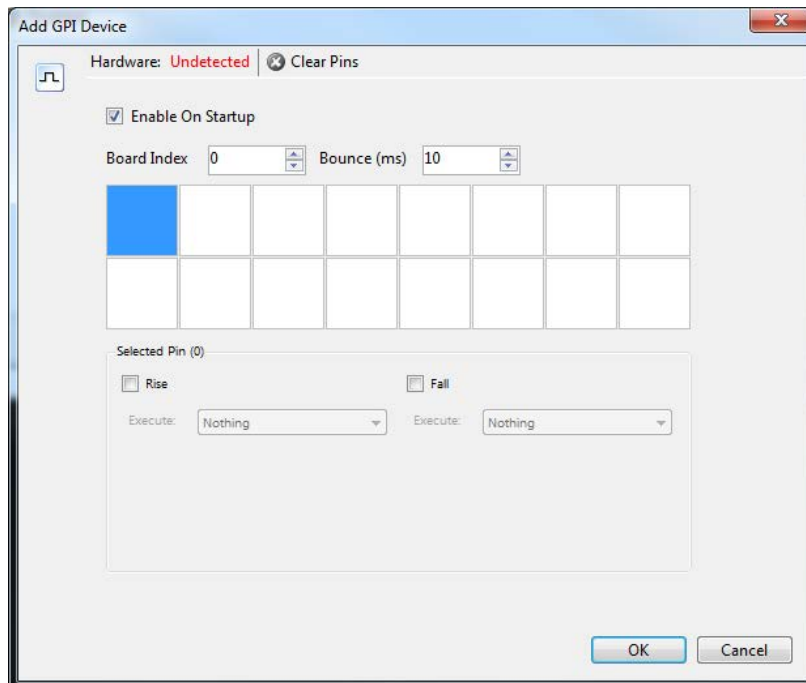


- **Enable on Startup** - Check the **Enable on Startup** check box to automatically enable the GPIs upon PRIME startup.
- The **Board Index** specifies the GPI number. Enter the desired **Board Index**, using the spin box.
- **Bounce** specifies the minimum amount of time, in milliseconds, between triggers. This prevents accidental triggering due to unintended multiple button pushes, which could be caused, for example, by a dirty switch. The default **Bounce** setting is **10 ms**. To change the setting, enter a new setting or select using the spin box.

To configure GPI Pins:

1. Select the desired pin to be configured by clicking the corresponding box. Note that the **Selected Pin (0)** group box label will reflect the number of the selected pin. Pins are numbered from left to right as follows:
 - 0 through 7 in the top row
 - 8 through 15 in the bottom row

2. An action can be executed on both the **Rise**, i.e., when the GPI button is pressed, and the **Fall**, i.e., when the GPI button is released. To set **Rise** and/or **Fall** actions:
 - a. Check/uncheck the **Rise** and/or **Fall** checkboxes to enable or disable GPI execution when the button is pressed (**Rise**) and/or released (**Fall**).
 - b. From the **Execute** drop-down, select an action to execute when the button is pressed (**Rise**) and/or released (**Fall**). The available actions are as follows: **Clear Channel, Select Channel, Cue Clip, Pause Clip, Play Clip, Stop Clip, Jog Clip (Fast Forward), Jog Clip (Rewind), Load Playlist, Play Playlist, Stop Playlist**.
 - c. From the Channel drop-down, select the **Channel** and **Layer** to which the action should apply when the button is pressed (**Rise**) and/or released (**Fall**).

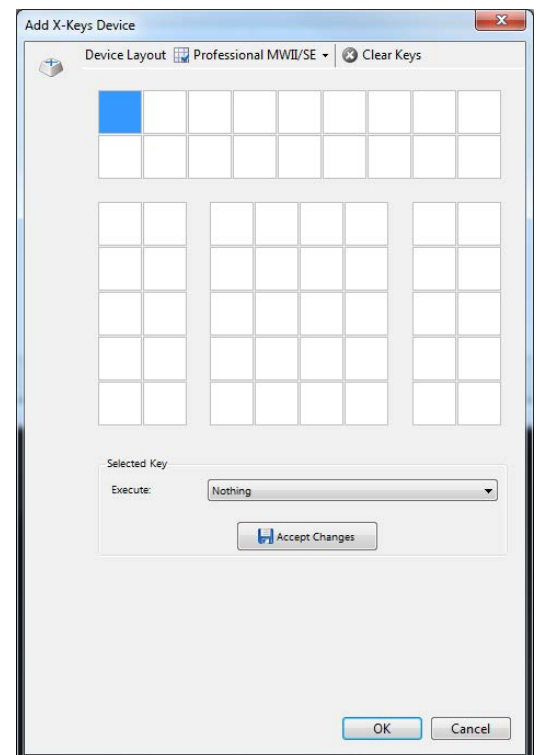

Depending upon the action that is selected from the **Execute** drop-down, additional information may be requested. In the previous figure, **Play Playlist** is selected as the action to be executed when the GPI button is released. The **Select Playlist** enable check box and **Select Playlist** drop-down are also displayed, in addition to the **Channel** enable check box and **Channel/Layer** selection drop-down.

To clear all pins:

- Select **Clear Pins** located on the top of the GPI configuration dialog.

For GPI Out see “GPI Out” in the “Resources” section!

X-Keys

X-keys® are a programmable keyboard that can be customized. To add an X-keys connection:

- Select the **X-Keys** icon located on the top toolbar of the **Device Settings** panel.
- Select the corresponding X-keys model to be configured using the dropdown menu located next to **Device Layout** label. Once selected, the X-keys model name will be displayed.
 - X-keys can be purchased through the X-keys website: <http://xkeys.com/>
- The white boxes represent the buttons in the X-keys layout. Click a box that is to be assigned a function to be executed. The box will become highlighted.
- Using the drop-down located in the **Selected Key** group box, select the desired function to be assigned to the highlighted key.
 - If a function regarding a **Clip** or **Playlist** is chosen (Ex: “Cue Clip” or “Load Playlist”), then option to specify a **Clip** or **Playlist** as well as the **Channel** will appear.

The screenshot shows a dialog box titled "Selected Key". It contains three dropdown menus. The first is labeled "Execute:" and is set to "Cue Clip". The second is labeled "Select Clip" with a checked checkbox and is set to "10". The third is labeled "Channel" with a checked checkbox and is set to "Channel 1, Layer 1". At the bottom of the dialog is a button with a floppy disk icon and the text "Accept Changes".

- Click **Accept Changes** to finalize your selection.

To clear all X-keys configurations:


- Click the **Clear Keys** button located on the top toolbar.

Import and Export Configs

PRIME Playback > Config

Import Configs

Export Configs

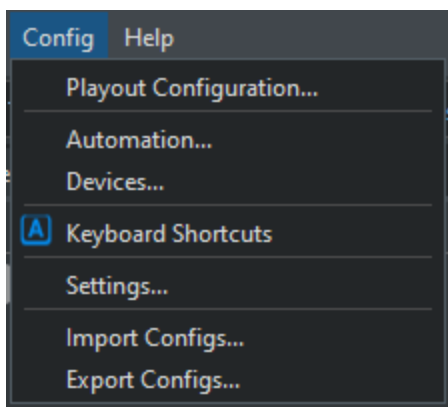

Prime export's configuration files as a single zip file. By default will include: Settings, PSK, DSK, Auto, WXPL, Config and WXEL configuration files. User can deselect items as desired.


This method is ideal for replicating on additional prime devices, performing backups, and providing Chyron support necessary config files for assistance.

FOR MORE INFORMATION ABOUT CHYRON VISIT:

[HTTP://CHYRON.COM](http://chyron.com)


Import Process

- Select Import Configs
- Choose a PRIME exported configuration zip file
- Choose all or desired config files to import
- Click Import Selected
- Restart PRIME for new configuration files to take effect

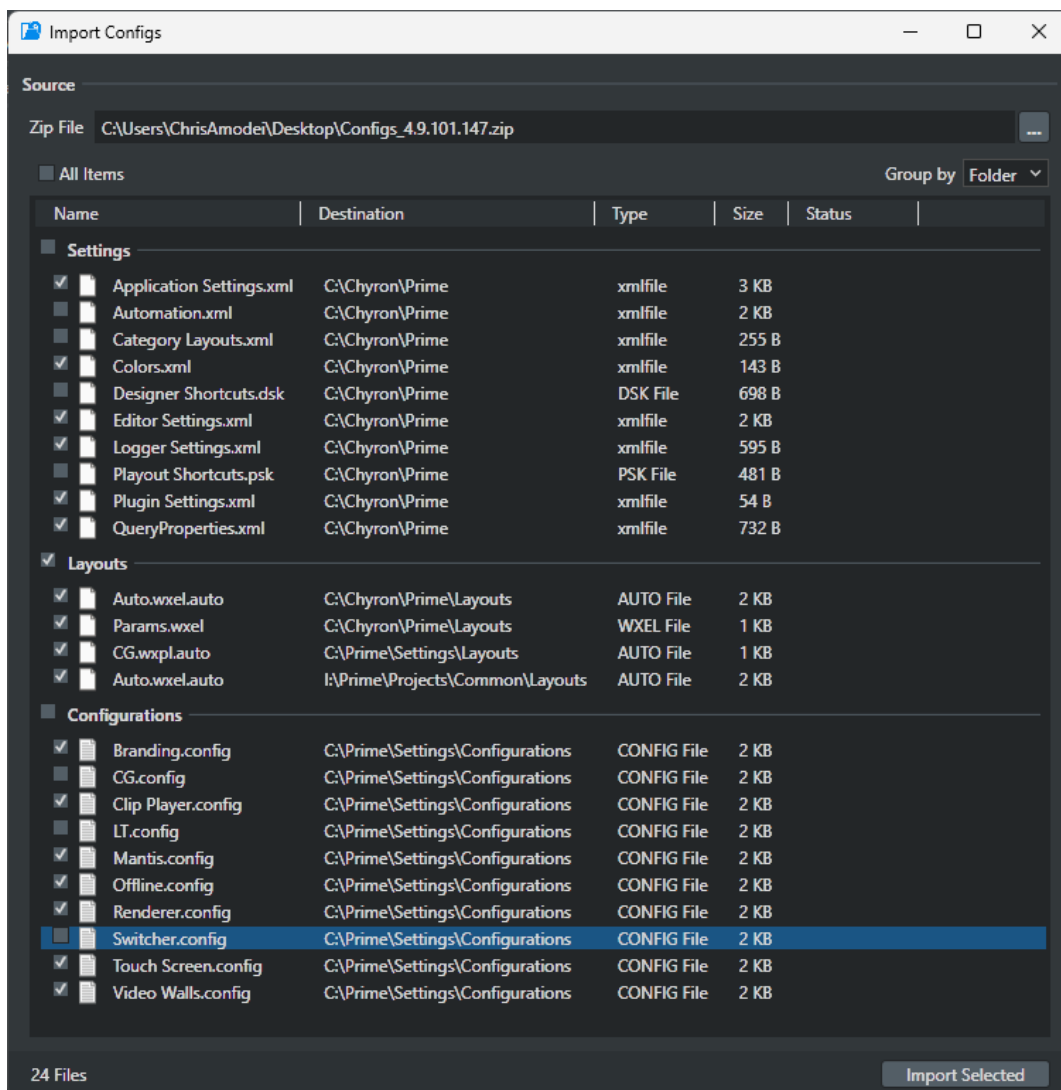

Export Process

- Select Export Configs
- Choose all or certain configuration files to export
- Click Export Selected and save zip file

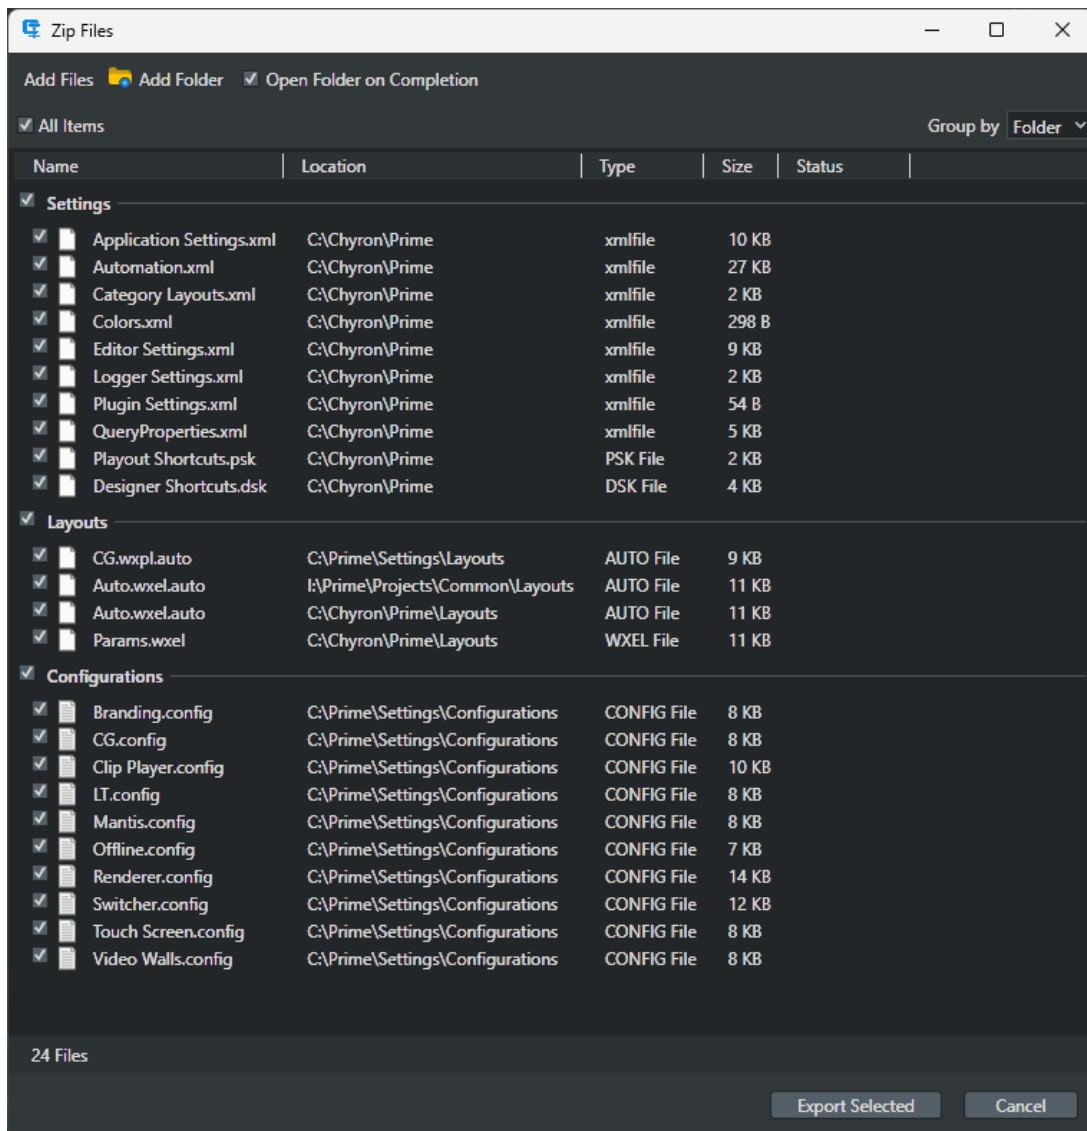

Playlists

Configure Playlists


Use the “Playout Configuration” dialog to add playlists.



Playlists are lists of items that can easily be played to air. Playlists can play Scenes, Images and clips all from the same list. You can have many playlists open and playing simultaneously.


There are two modes for the Playlist selectable in each individual Playlist:

- Take List
- Sequence

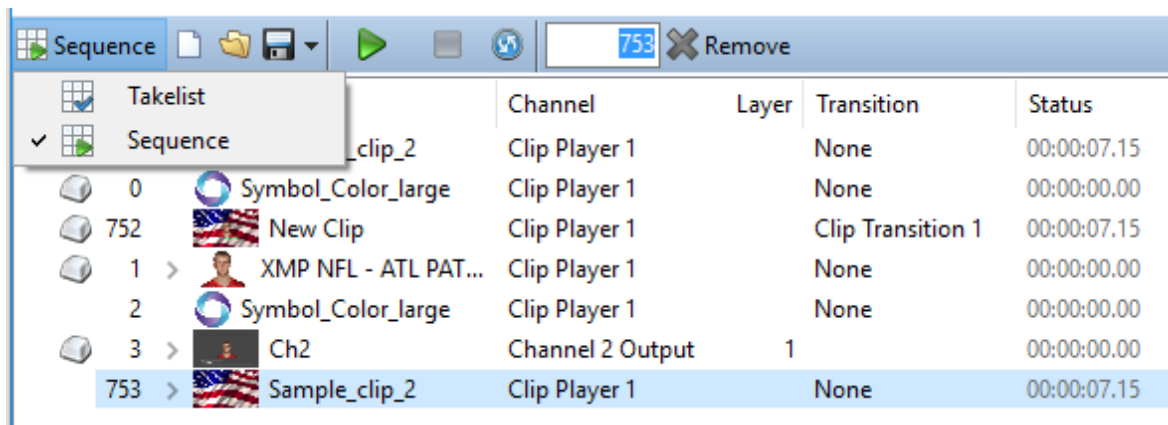

Take List



To add items to the Take List, drag and drop any item from its browser to the playlist.

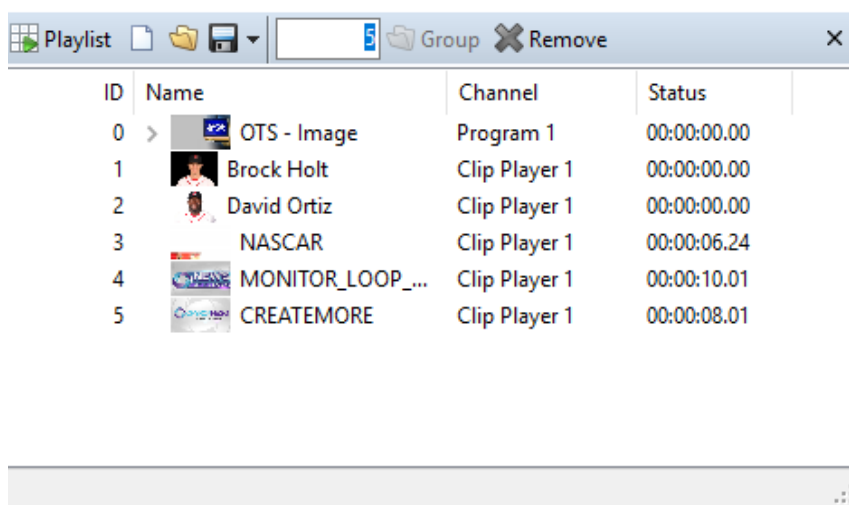

ID – The ID is the number that is used to play the item to air from the keyboard. If the scene, image or clip does not have a “Message ID” associated with it the playlist will assign the next available ID. Scene and Clip “Message ID’s” are assigned from the Scene property editor.

Pressing 555 and hitting the Enter key will load the NASCAR clip from the playlist.

Expanding the item by clicking on the Right error next to the ID will expand the item to show any Control Panel items for this Scene. From this view, you can trigger buttons or do text, image and clip overrides.

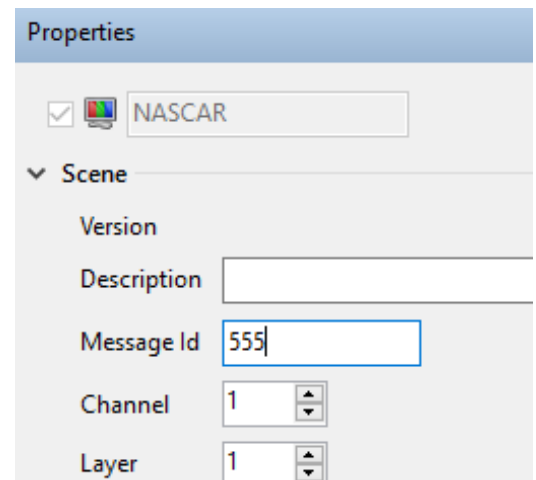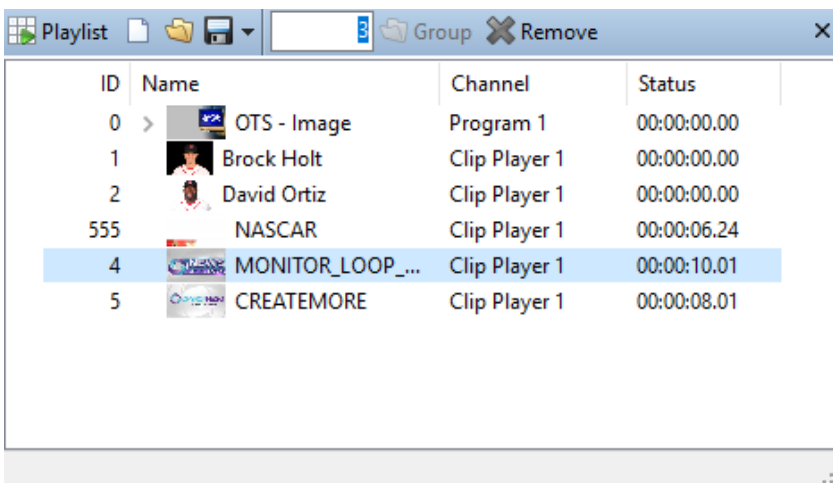



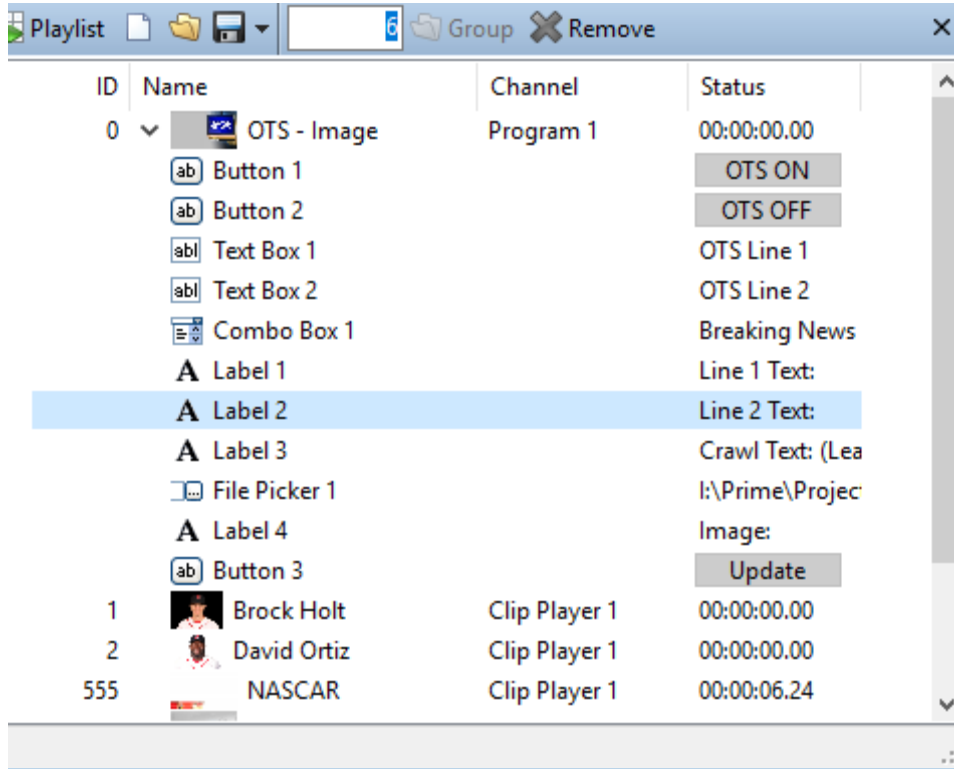


Image overrides will show the Image Browser:

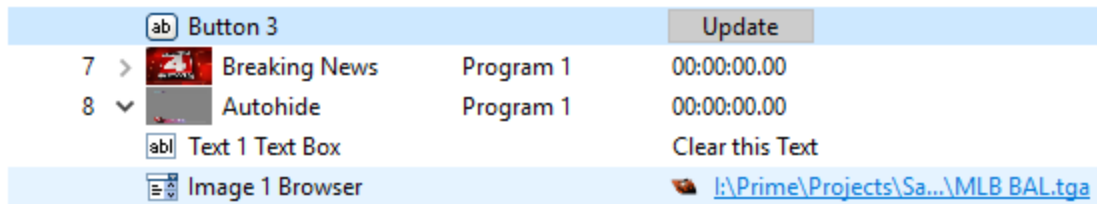


Click on the link to show the Image Browser:

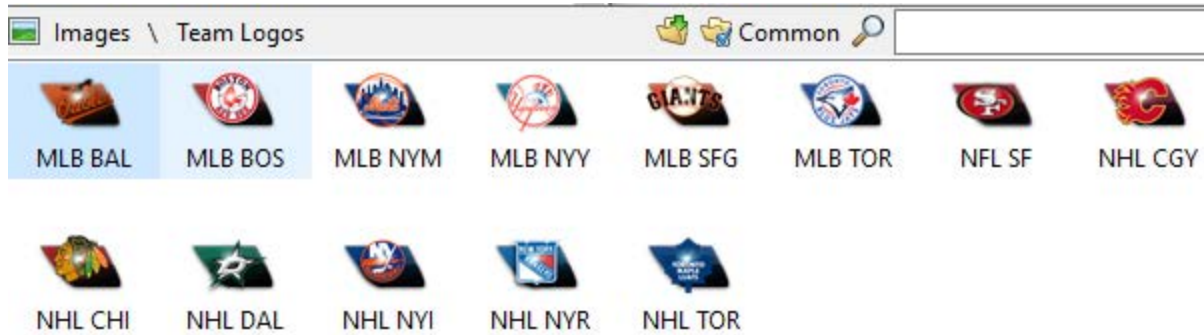


Name: The name field identifies the name of the item. The item can be a clip, Image or scene.

Layer: The layer a scene is played to air can be modified in this field:

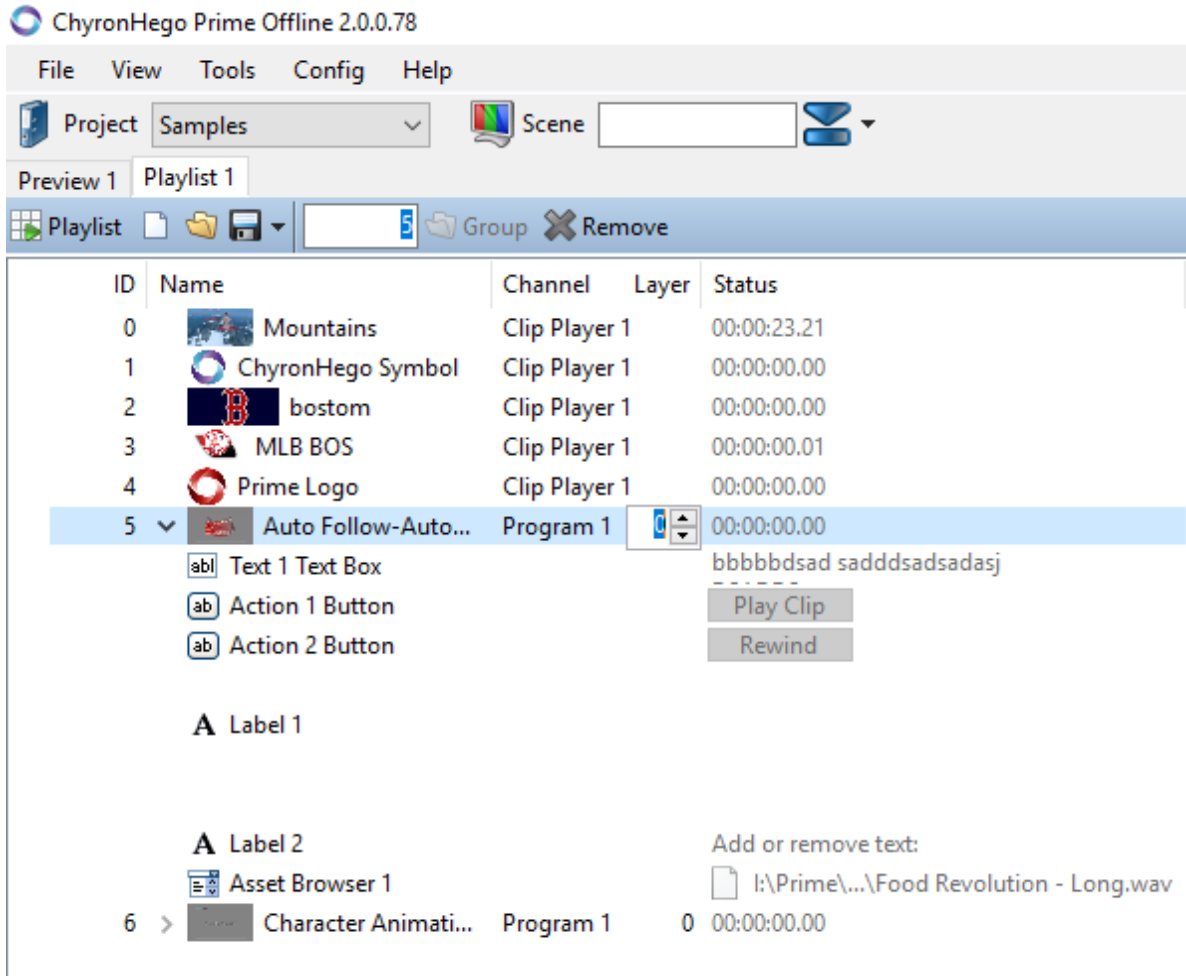

The layer field is NOT accessible for clips.


Status: Shows the status for clips

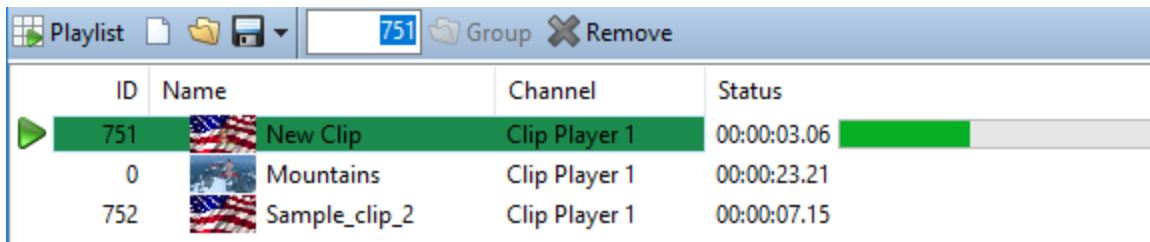

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)


Show the status for graphics: The status bar will show the duration of the effect In, then pause until the effect out is played:

Here two graphics are on air.

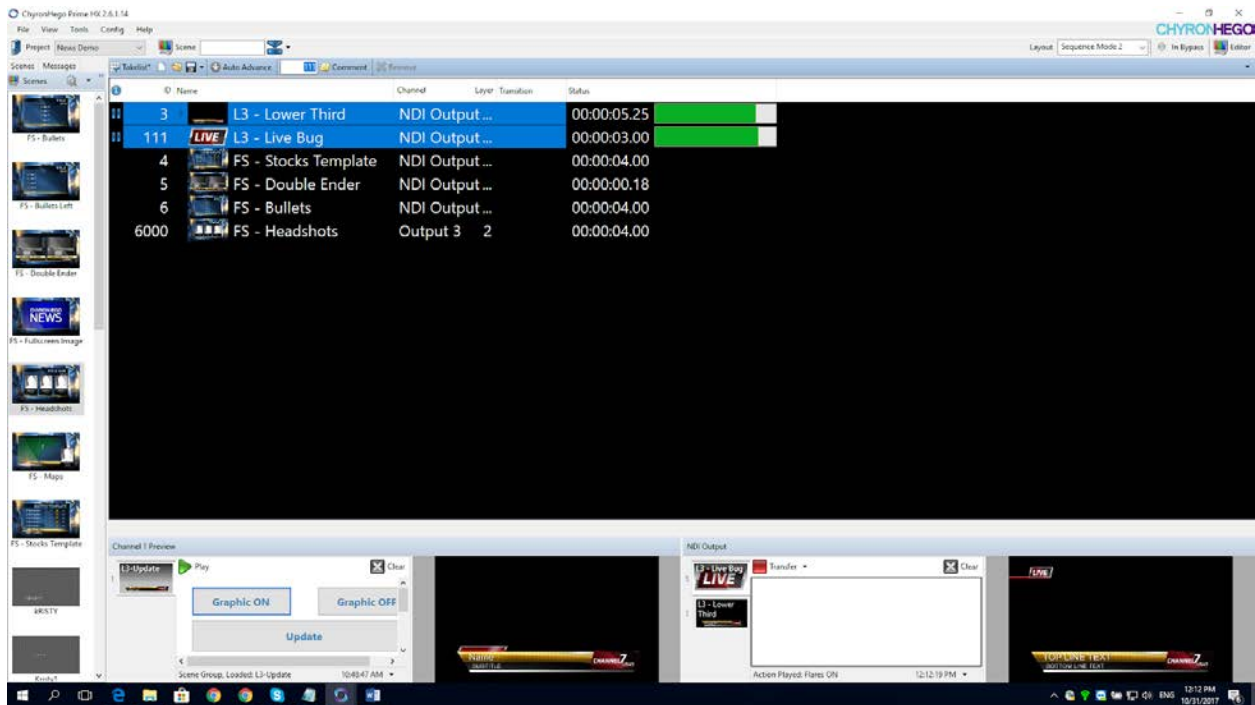


Now the second graphic, the live bug has been played off:

To set a new appearance for the playlist click the dropdown in the upper right-hand corner

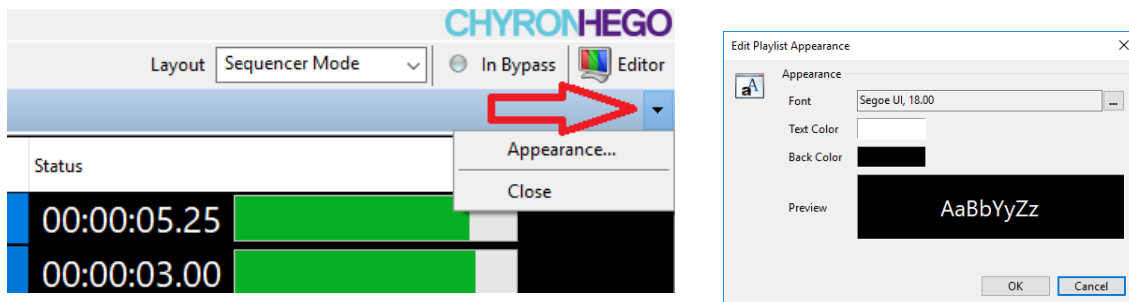


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Channel Assignment:

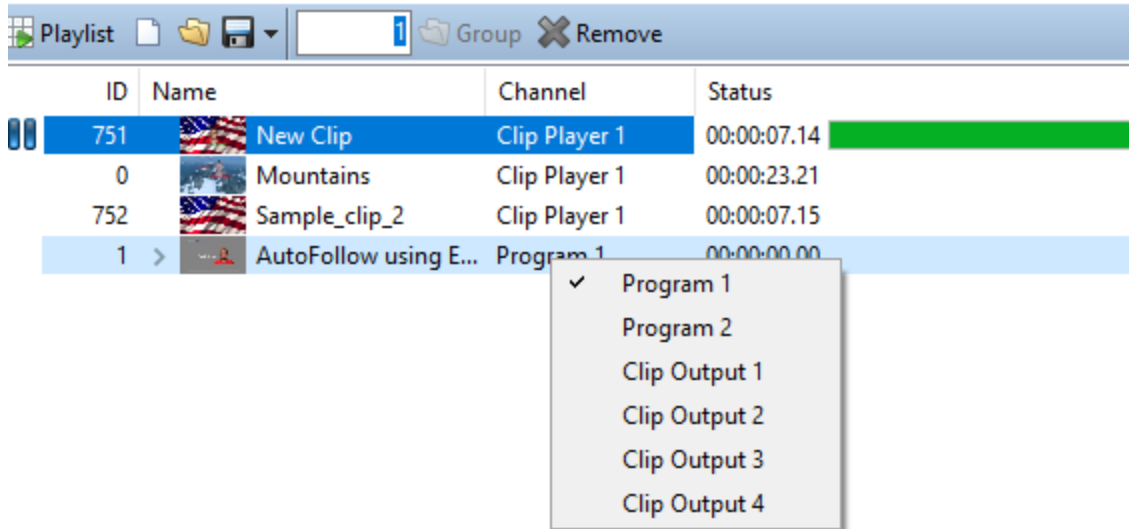

Sequence

In Sequence mode, the Playlist will operator as a Sequencer. Items can have pauses and be run in a linear fashion sequentially.

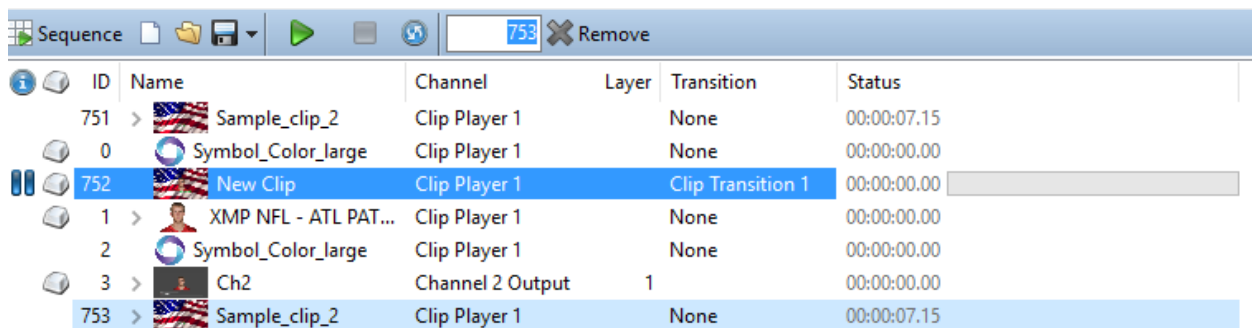







You can add Graphic scenes, Images and clips to the sequencer. Each item can have a pause associated with it.

There is a Sequence Loop toolbar selection.

Playlist as a Still Store

Simply drag images from the browser into the playlist...

The screenshot shows a software interface for a playlist. At the top, there is a toolbar with icons for 'Playlist 1', 'Takelist*', a folder icon, a save icon, 'Auto Advance', a search box, 'Comment', and 'Remove'. Below the toolbar is a table with the following data:

ID	Name	Channel	Layer	Transition	Status
0	 Buckner_John	Clip Player 1		None	00:00:05.00
1	 Democratic Logo	Clip Player 1		None	00:00:05.00
2	 Rankin_Bob	Clip Player 1		None	00:00:05.00
3	 Primavera_Dianne	Clip Player 1		None	00:00:05.00
4	 Democratic Logo	Clip Player 1		None	00:00:05.00
5	 Republican Logo	Clip Player 1		None	00:00:05.00

Shortcut Key Editor

The **Shortcut Key Editor** allows the user to configure which shortcut keys correspond to which action defined in the “Description” column. Prime employs two Shortcut Key Editors. One for Playout and one for the Designer.

Shortcut keys are assigned by selecting the shortcut and pressing the keyboard key(s) you wish to have assigned to that currently selected shortcut. For each Shortcut Key Editor, assigned Shortcut keys can be saved and loaded. Playout shortcuts are saved with a .psk file extension and Designer shortcut keys are saved as a .dsk file extension.

Playout Shortcut Keys:

Shortcut key categories:

- 1.) **Component** - these target PRIME Components more generally eg Play Preview


- 2.) **Global** - target PRIME Components more specifically eg Play Preview 1
- 3.) **Scripts** - these target Application Scripts (Tools > Application Scripting)

Compound Shortcuts - Multiple shortcuts can be set to a single shortcut key combination, which, when triggered execute all assigned functions simultaneously.

Keyboard shortcuts can be executed at anytime regardless of the focused window in the application.

Reset to Defaults

Preassigned Keyboard shortcuts can be loaded via the Reset to Defaults dropdown

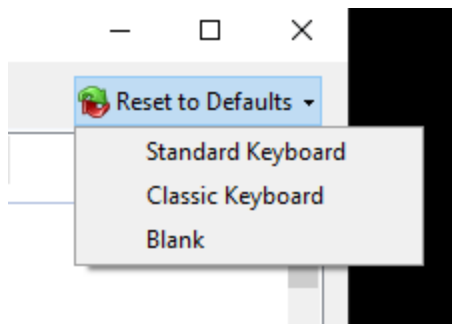

Standard Keyboard - PC keyboard based PRIME default shortcut keys

Classic Keyboard - These shortcuts are designed to be used with the Chyron Classic Keyboard. Shortcuts are familiar to Lyric users. Additional documentation located in the

[Chyron Classic Keyboard User Guide](#)

Blank - no assigned shortcuts

Default shortcut key files cannot be overwritten however they can be loaded, customised and saved to a file.

Erase vs Clear Shortcuts


Erase and Clear shortcuts exist at both Global and Component levels. There are options to affect either a single scene or the entire output.

Erase: Cuts a scene(s) from Preview or Program without playing the Effect Out event.


Clear: Removes a scene(s) from Program by playing the Effect Out event. Clear shortcuts are not available for Preview outputs.

The Keyboard Shortcuts are a growing list and can be different than currently documented.


Component

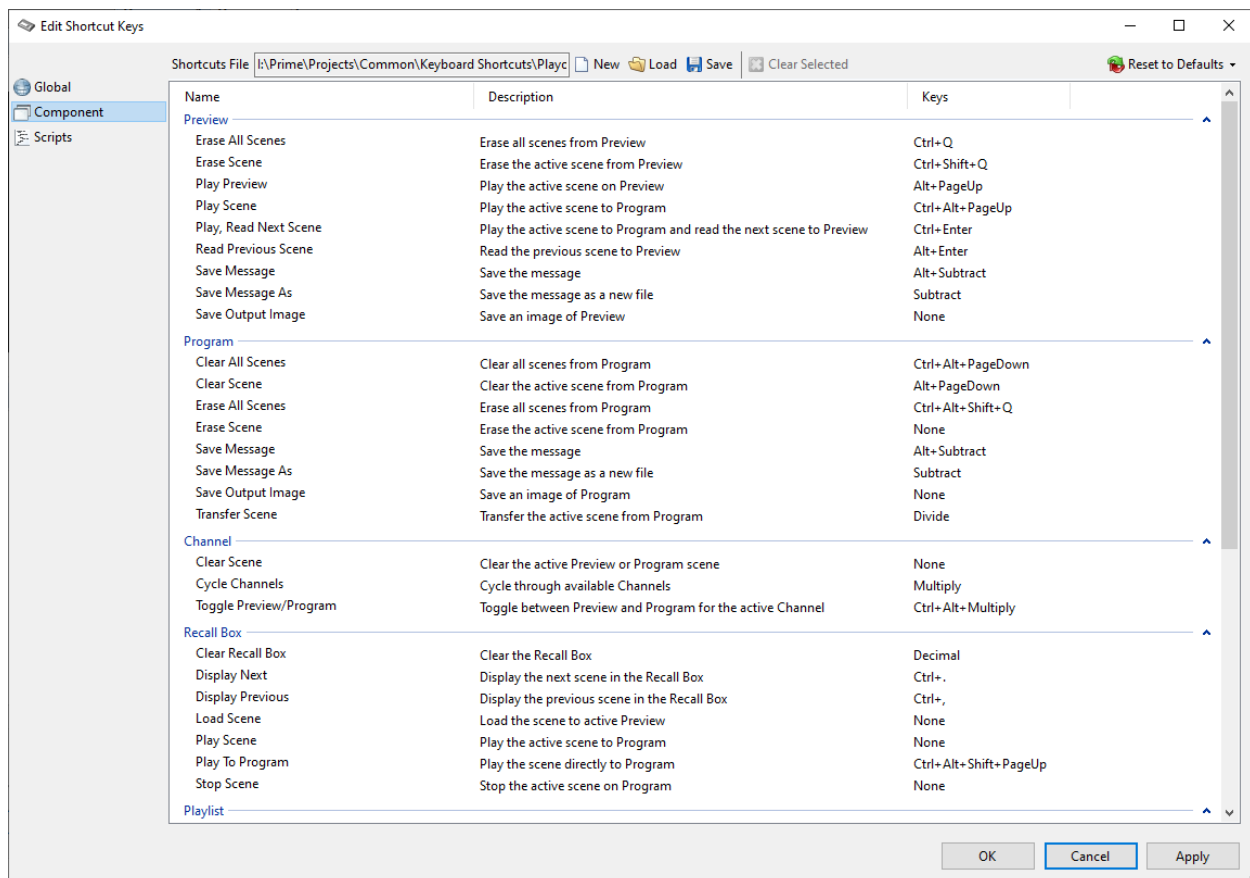

Global

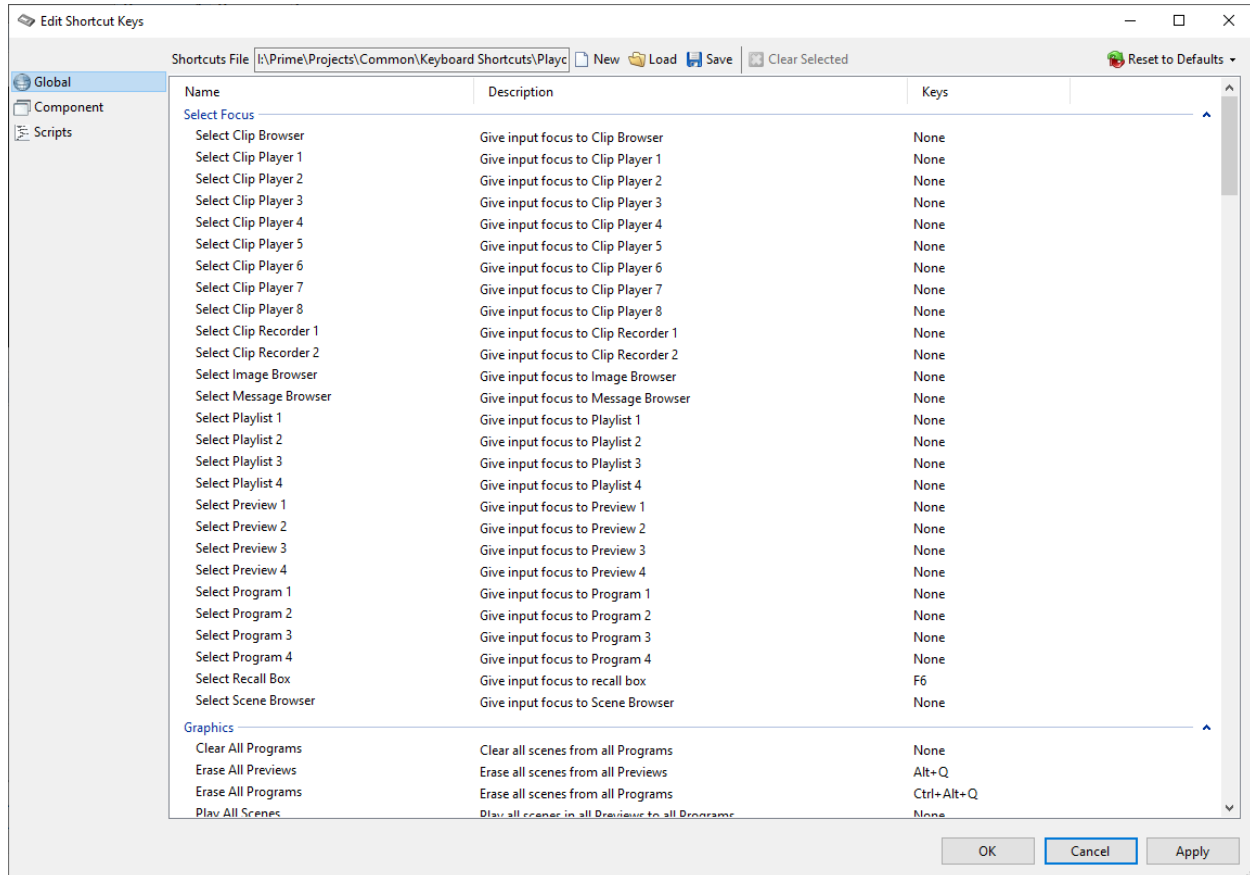


Designer Shortcut Keys

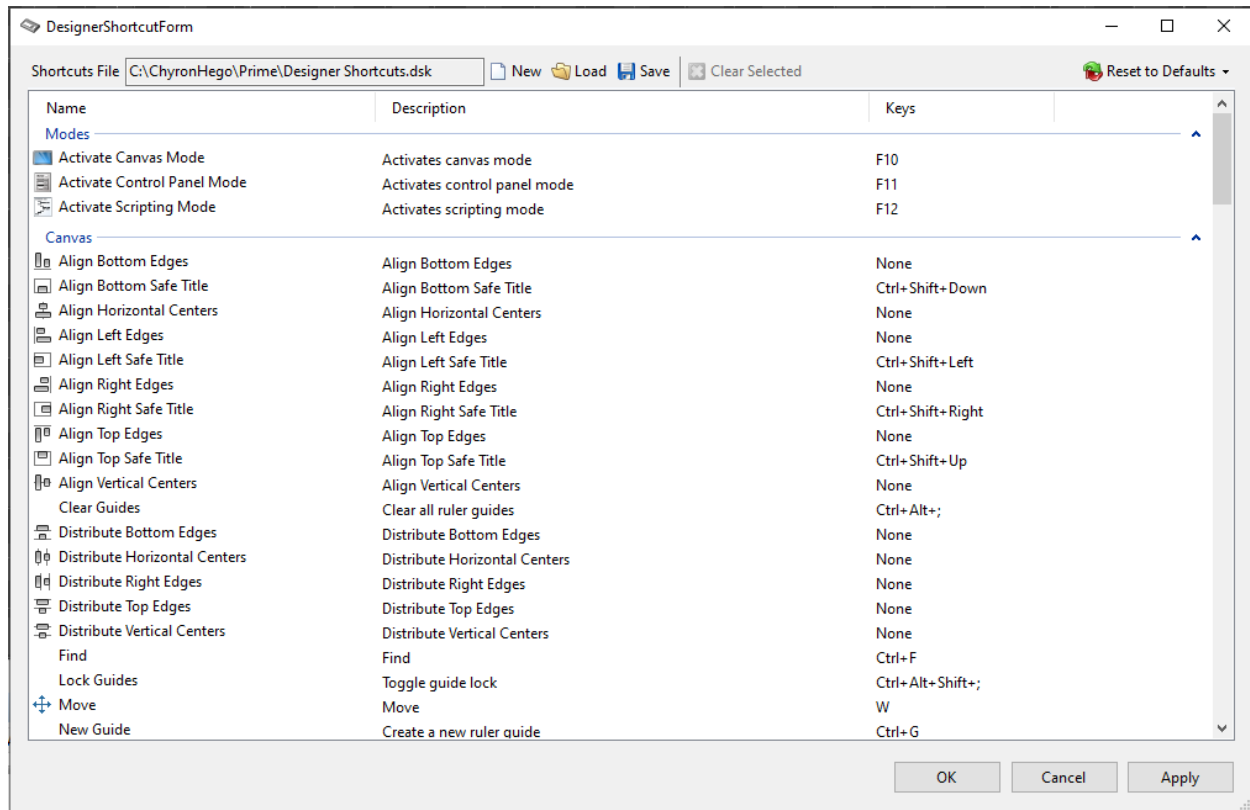

To set the “Keys” field back to “None”, right click and select “Clear Selected”

Right click for unicode options

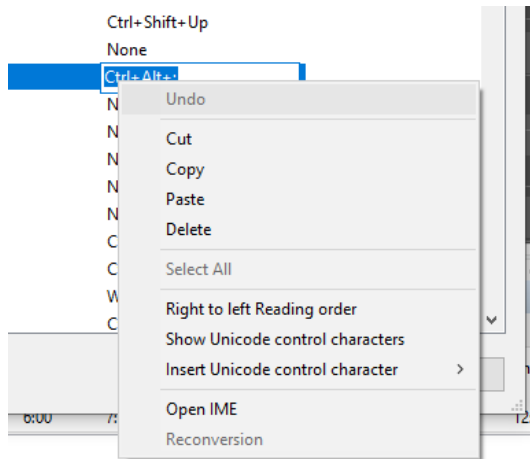

The keyboard arrow keys functions as follows when the scene tree or scene object in the canvas is selected:

- **Arrow Keys** will change value by **1 unit** in the direction of the arrow
- **Shift + Arrow Keys** will change value by **10 units** in the direction of the arrow
- **Ctrl + Arrow Keys** will change value by **.1 units** in the direction of the arrow

The Transform Spinner controls will work as follows:


- **Right click drag** or **mouse wheel** will change the value by **1 unit**
- **Shift + Right click drag** or **mouse wheel** will change the value by **10 units**
- **Control + Right click drag** or **mouse wheel** will change the value by **.1 unit**

To set the “Keys” field back to “None”, right click and select “Clear Selected”

Tools

To access PRIME tools:

- In the top menu bar, select **Tools** and select the desired item:
 - o **Scene Editor**
 - o **New Master Control Panel**


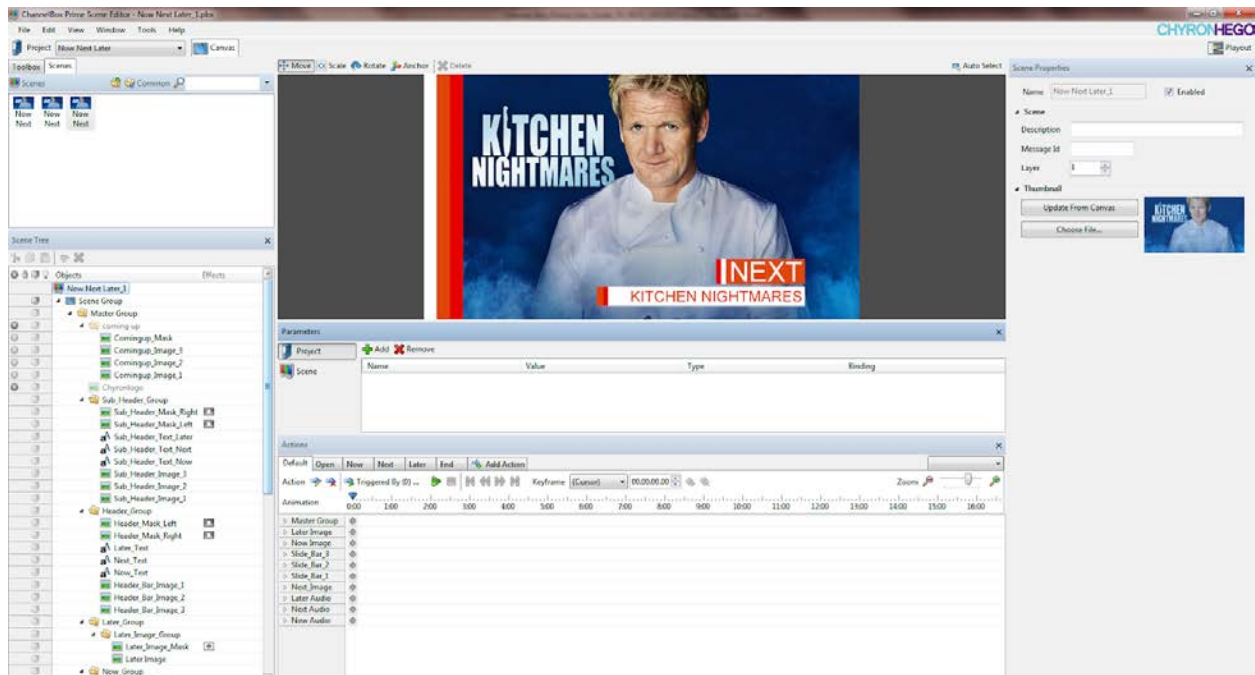


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)


Parameters

Scene Parameters are available to ONLY the scene. Project parameters are global to all scenes in the project. Application Parameters, defined in the Application Logic section, are available to all scenes in all projects.

Drag and drop any attribute or keyframe into an existing parameter will bind that parameter to that attribute. Drag keyframes from the keyframe editor to bind these properties

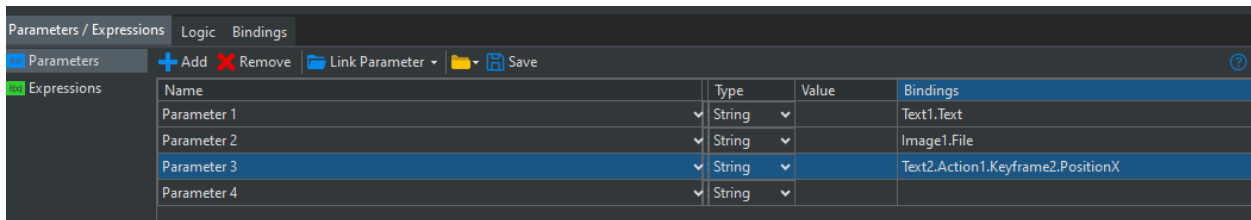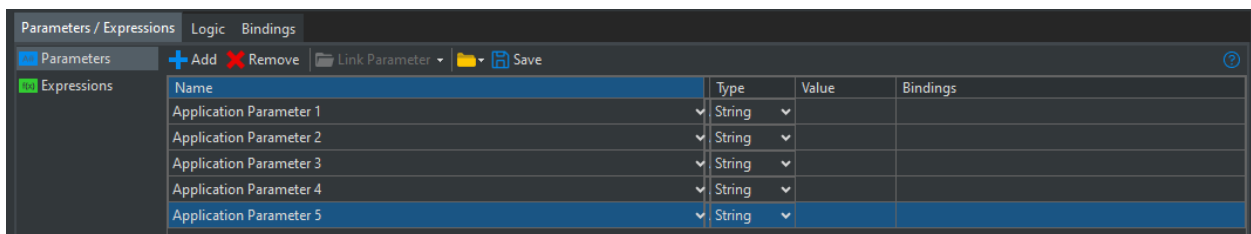

Each Parameter has a “Type” field that defines the parameter type.

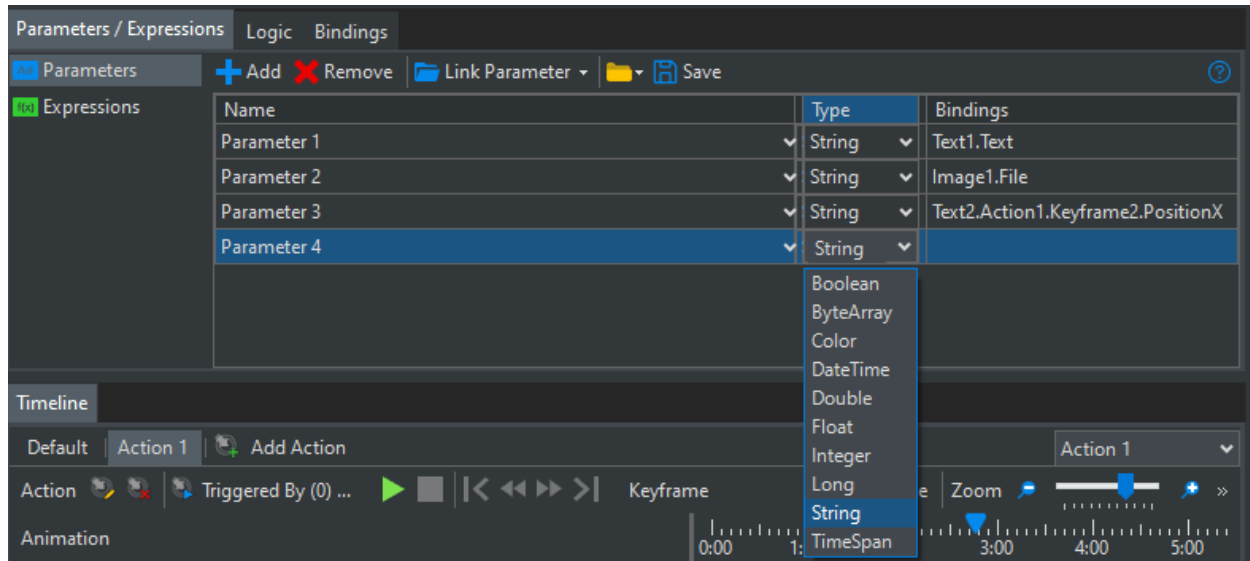

PRIME will determine the type automatically when users drag and drop the parameter. If users add parameters manually then the type needs to be set by the user.


Master Control Panels

Master Control Panels are panels users create that, unlike scene control panels, are not tied to any specific scene. Users can create Master Control Panels using the master Control Panel “Panel Builder”. Controls can be either hooked up in the user interface of execute C# code for more sophisticated control. Select File new Master Control to begin to create your panel.

Drag controls from the “toolbox” to the scene designer.

Bind the Button using the “Properties panel” of the control.


In this example, the command button is bound to opening a scene:

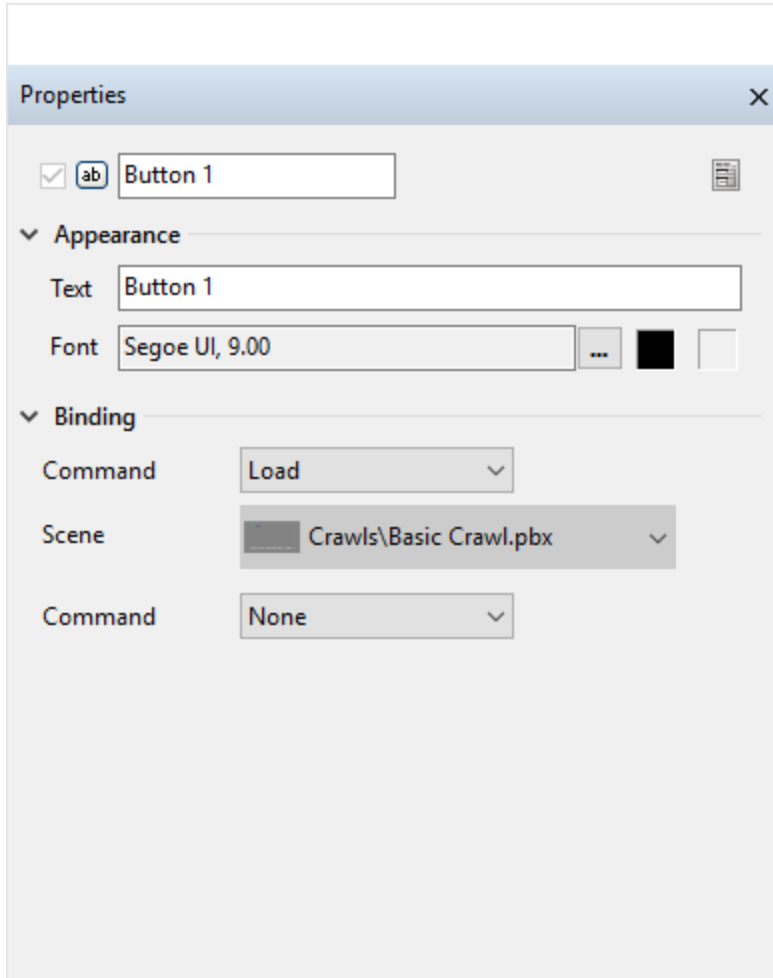


You can continue to bind as many commands to the button as needed.

Alternatively, you can use the “Button_Click” event: Double click on the event will bring up the “Button_Click” event handler in the C# code editor

FOR MORE INFORMATION ABOUT C
[HTTP://CHYRON.COM](http://chyron.com)

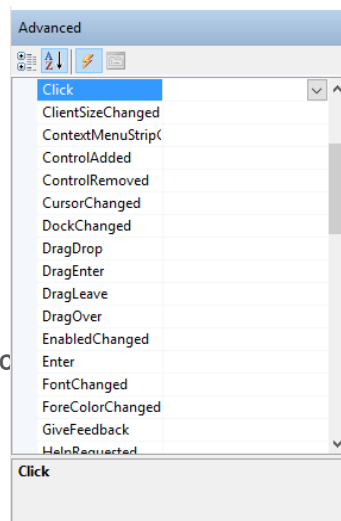

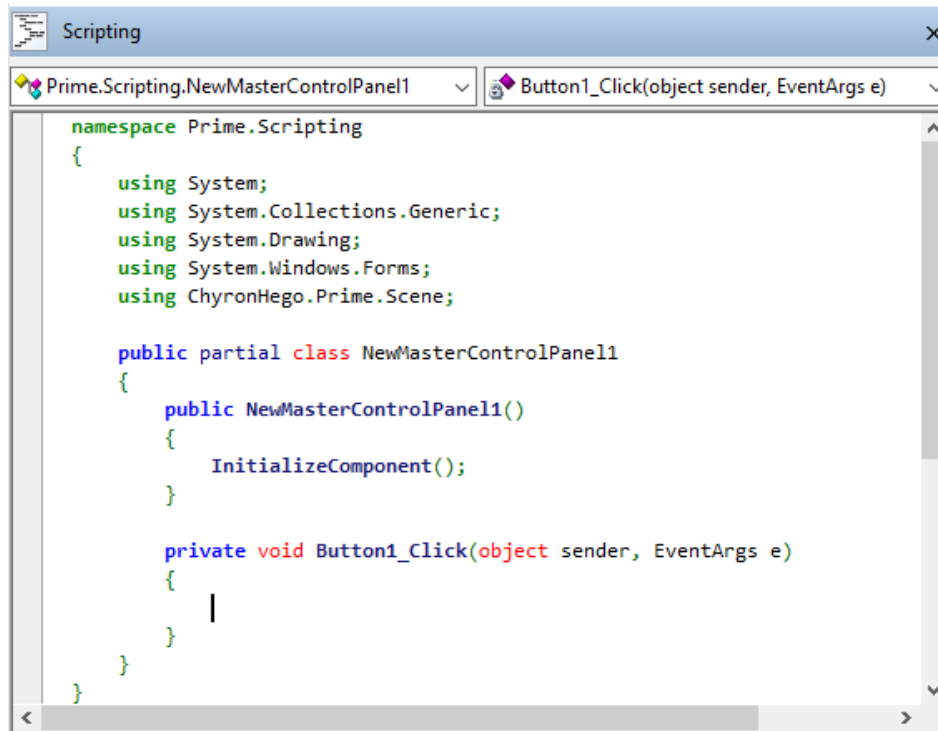



```
Scripting
Prime.Scripting.NewMasterControlPanel1 Button1_Click(object sender, EventArgs e)
namespace Prime.Scripting
{
    using System;
    using System.Collections.Generic;
    using System.Drawing;
    using System.Windows.Forms;
    using ChyronHego.Prime.Scene;

    public partial class NewMasterControlPanel1
    {
        public NewMasterControlPanel1()
        {
            InitializeComponent();
        }

        private void Button1_Click(object sender, EventArgs e)
        {
            |
        }
    }
}
```

There is also a handy tool to automatically generate a “Master Control Panel” from the file menu. “Generate Master Control” which will build a control panel for you by adding a “Play”

button for every scene in your current project.

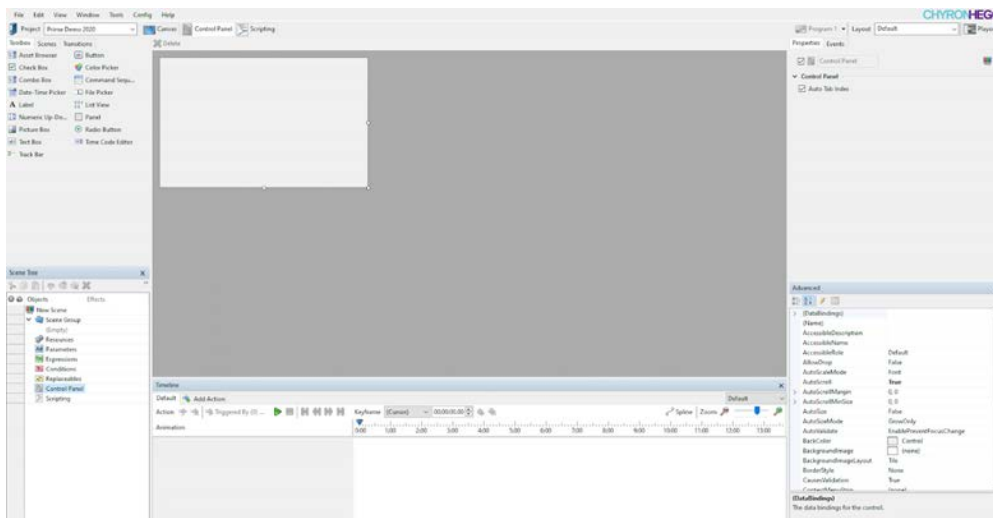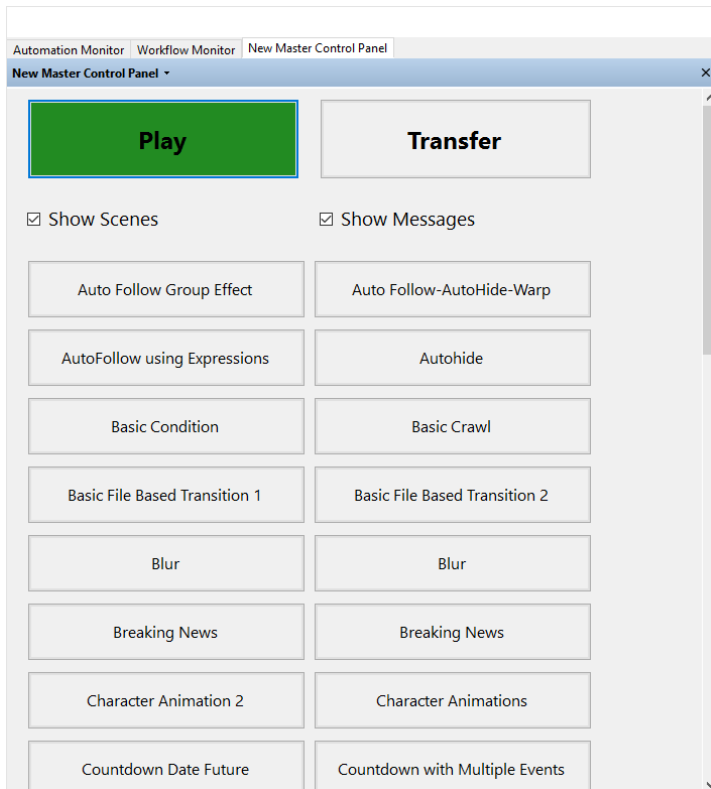

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

The following Master Control Panel is used to connect and control a ChyronHego PowerClips system.




The following Master Control Panel is designed to connect and control a Black Magic Router. This allows for the changing of the source video that is connect to PRIME's input.




Help

Open Log Folder

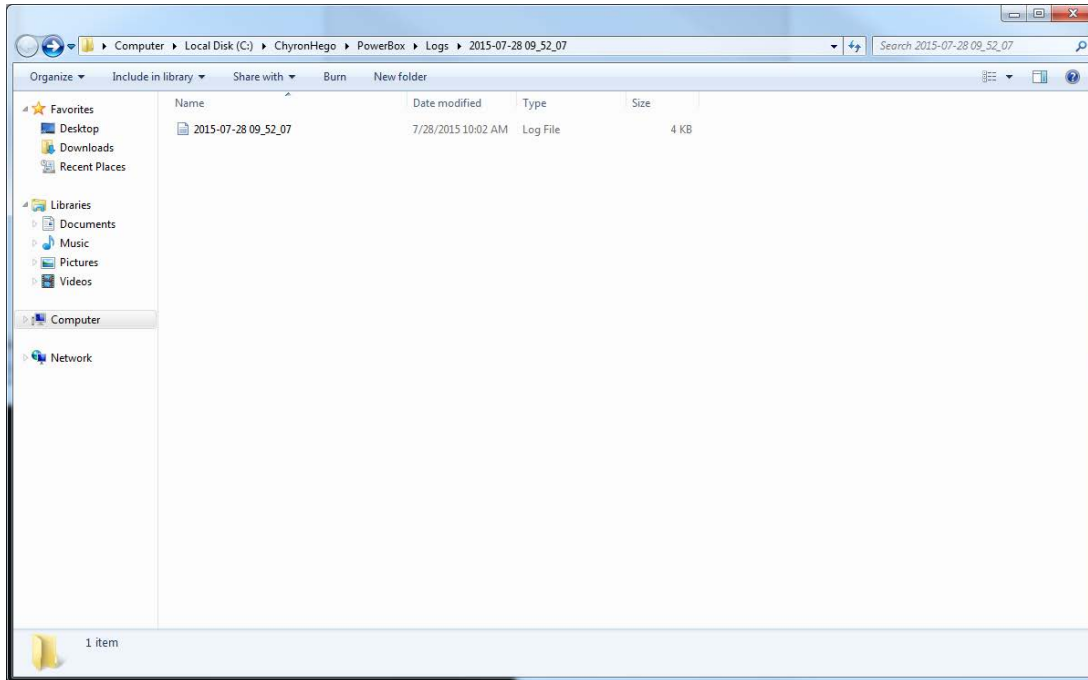

All log files will be located in this folder

Show Current Log

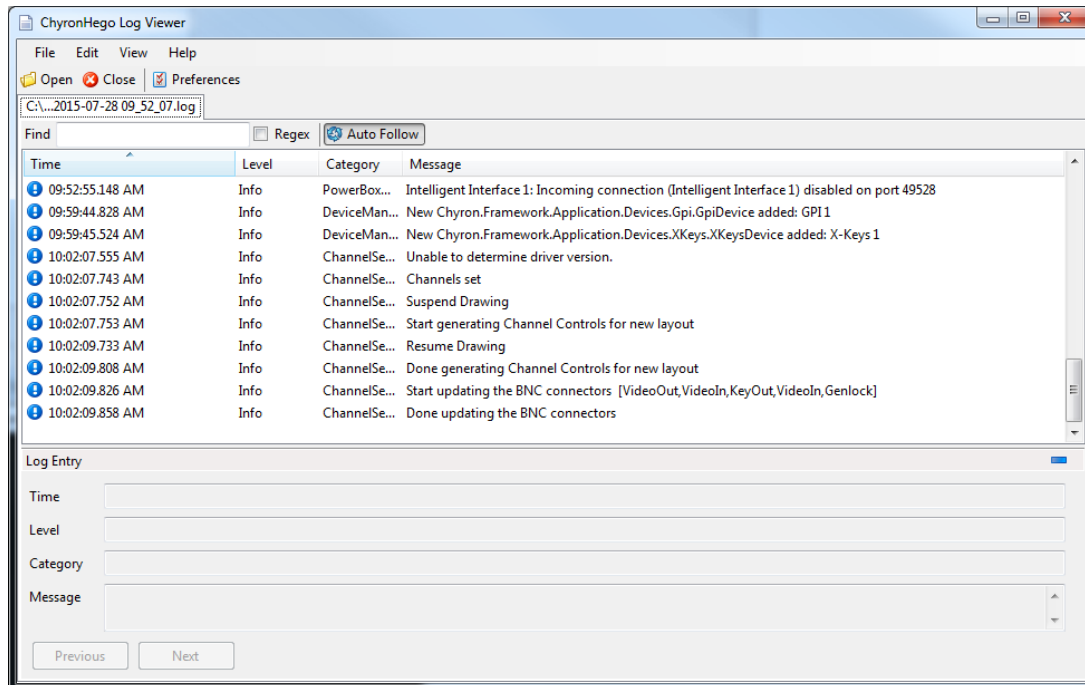


The current log will be loaded into the “ChyronHego Log Viewer”.

Designer

Design for specific licensed options

You can enable/disable software features to match your playout license. This gives you the ability to target systems that are licensed differently.

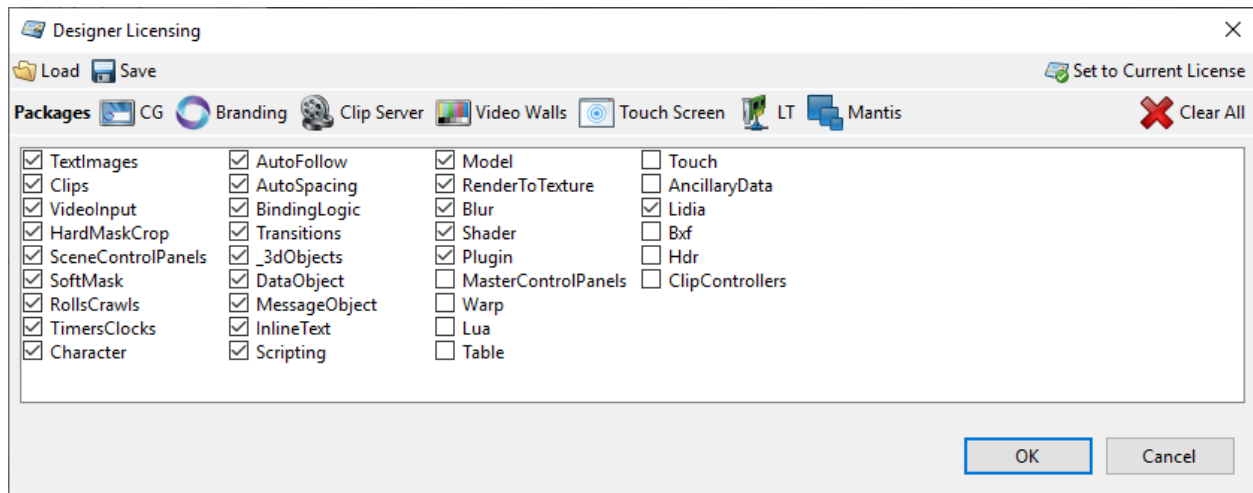


The toolbar has some quick pick shortcuts based on PRIMES use case pricing model. Select the options you would like to enable. You can load/save these settings.

Live Mode

The Designer can be output to any of the defined outputs in the Playout Configuration.

This allows for Realtime output previews. Select from the list of outputs. The currently selected output is "Program".

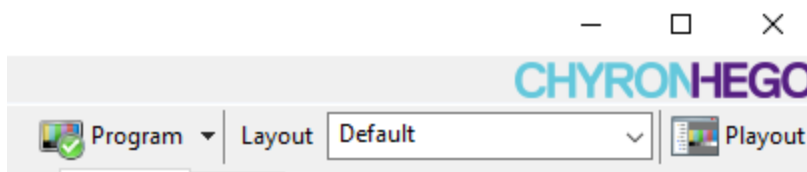

Designer Settings

File

New Scene

Use the selected scene whenever a new scene is created. Useful to have a base scene and its elements when new scenes are created.

New Base Scene

Create a “Base Scene” to be referenced by normal scenes. Refer to the *Resource object* “Base Scene”.

New Edge Scene

Prime Edge Scene has a .pes extension. Toolbox will only display graphics, effects and resources supported in Edge. Options to save a Prime scene to an Edge scene type by using *File Save .pbx As .pes*. If the Prime scene includes any unsupported graphics, effects or resources for Prime Edge a warning prompt will appear. Unsupported objects will be removed from the edge scene if you choose to proceed.

New Master Control Panel

Opens up a new Master Control Panel canvas

Application Logic

See the separate “Application Logic” Section for more details.

Save as CAMIO File

.CRD files are currently generated when ‘Saving to CAMIO’ from the Prime Designer. This process automatically exports the file into the Chyron CAMIO Context and Folder defined by the CAMIO export settings in Prime.

To permit users to have more control over the upload process, and to prevent on-air content being accidentally overwritten, users can manually upload the .crd file using CAMIO Asset Manager.

In addition, users using the CAMIO Render Engine outside of a CAMIO environment, with the Chyron Media Engine API requires a .crd file in order to specify jobs to be rendered.

Import FBX

Allows for importing FBX models.

Import SVG

Refer to the Polygon object.


Import AE

Allows importing of After Effects Projects.

Refer to the “PRIME_After_Effects_Guide” for details.

Editor Settings

General

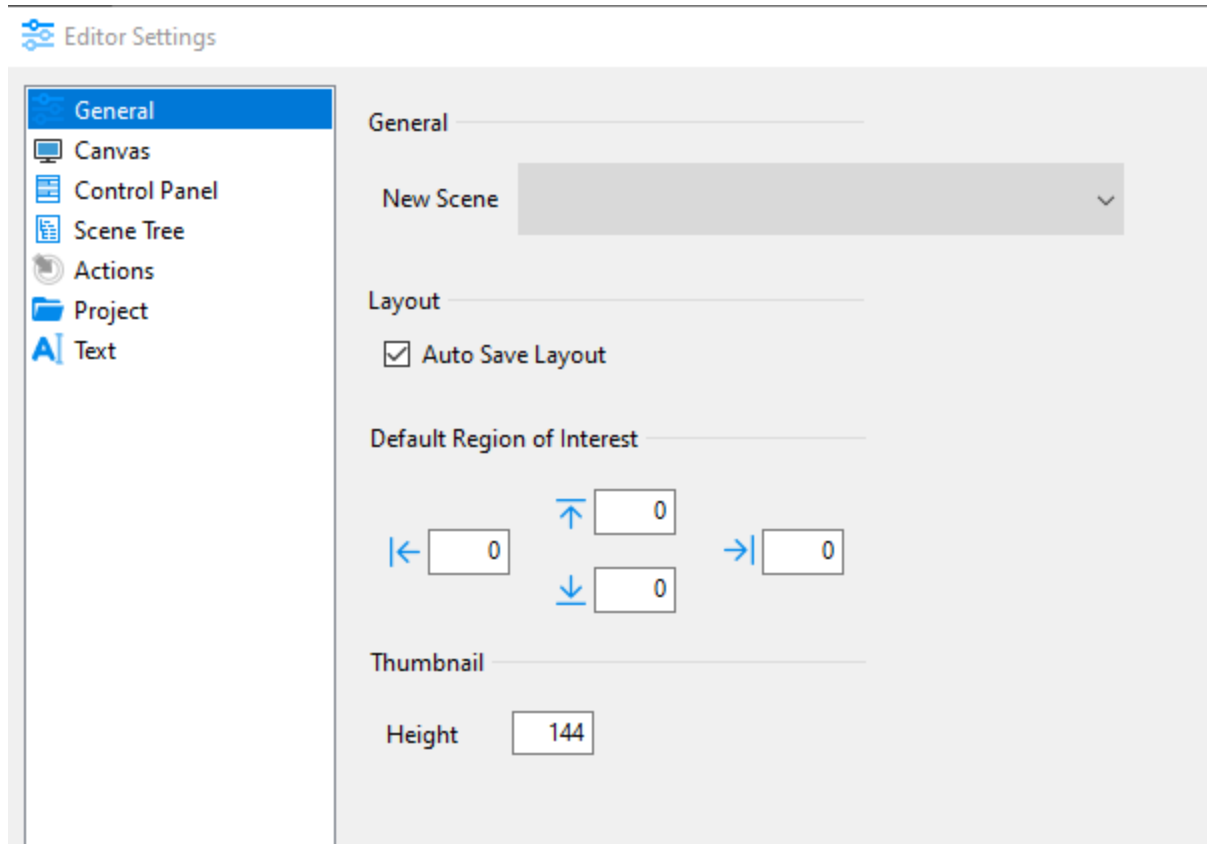

New Scene

Optional to define a default scene whenever New scene (ctrl + N) is created .

Layout

Auto Save Layout enabled will save all layout changes to the currently loaded layout. With this setting disabled, you must manually save any layout changes to the specified .wxel file.


Default Region of Interest

Define numeric values for Top, Left, Bottom and Right for the default region of interest guideline that will be displayed for each new scene. *(0,0,0,0 is fullscreen)*

Thumbnail

Default height of thumbnail image

Canvas Settings

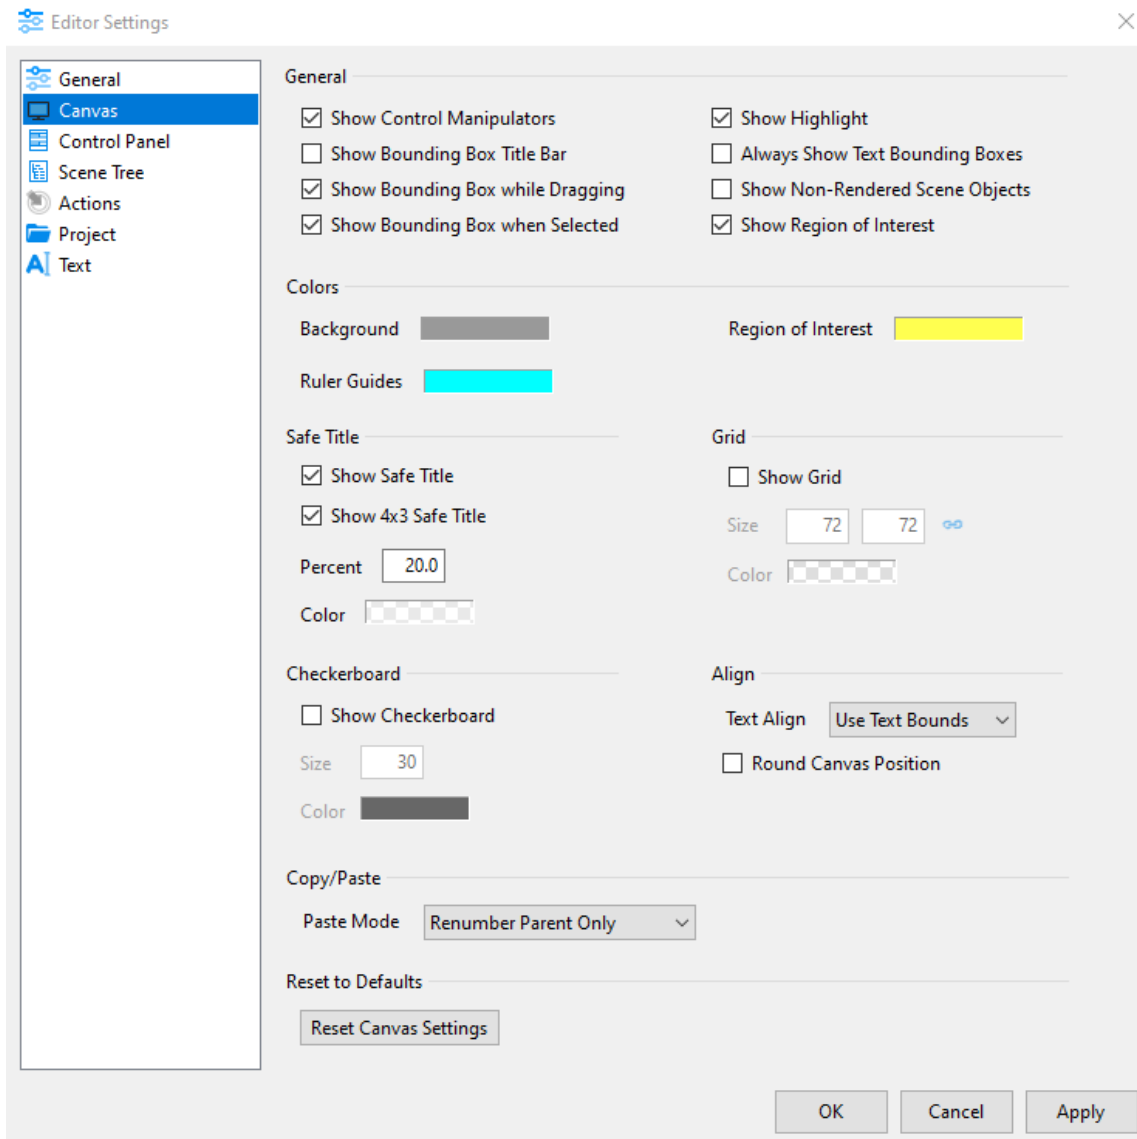

General

Allows for visual control of selected objects.

Color

Allows setting background color, region of interest color, ruler guide color.

Safe Title

Allows for visual control of the canvas safe title guides.

Ruler Guides**Creating Guides**

By default, objects will snap to ruler guides. You can adjust snapping settings in the Tools menu.

You can also lock all guides from the Tools menu. This can be handy when you have lots of objects in your scene and you don't want to accidentally select a ruler guide.

To begin creating a ruler guide, open the designer. Next, open the tools menu and choose "Create Guide." This will open the Guide Form, from which you can define the dimension and position of your new guide. The default shortcut to open this form is Ctrl+Alt+G.

Alternatively, you can create guides by dragging them onto the designer canvas. First, make sure you are in the designer and that rulers are shown (Tools > Rulers/Ctrl+R). Then, click on a ruler and drag your mouse onto the canvas. A new guide will be created and placed wherever you drop it.

Deleting Guides

To delete a guide, simply drag it onto a ruler and it will automatically be deleted. To delete all guides, go to Tools > Clear Guides.

If you want to hide all of the guides temporarily, you can go to Tools > Show Guides to toggle them off and on.

Align (Smart Guides)


Determines if the built-in alignment tools (Smart Guides) should align text objects by its bounding box or the bounds of the text itself.

Copy/Paste Mode


Renumber Parent only: When you copy and paste a group, only the pasted parent will autoincrement the suffix number value of the group name.

Renumber Parent and Children: When you copy and paste a group, the pasted parent as well as all children objects will autoincrement the suffix number value of their node name.

Control Panel Settings

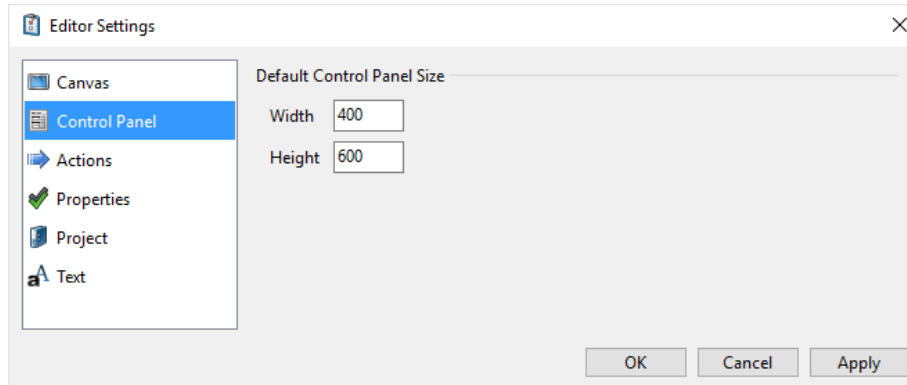

Scene Tree

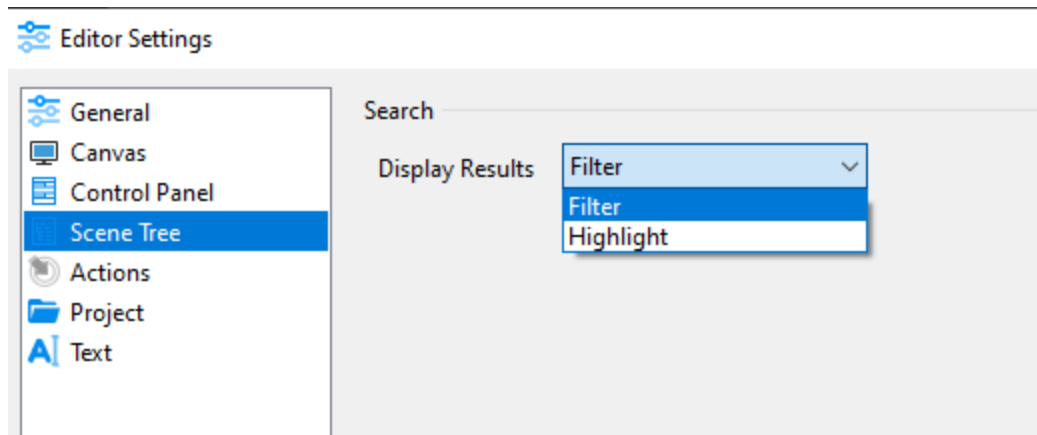


Filter

With filter selected, only objects that meet the search criteria in the scene tree search bar will be displayed in the scene tree.

Highlight

With highlight selected, all objects in the scene tree will remain visible, and those that meet the search criteria of the scene tree search bar will be highlighted.

Action Settings

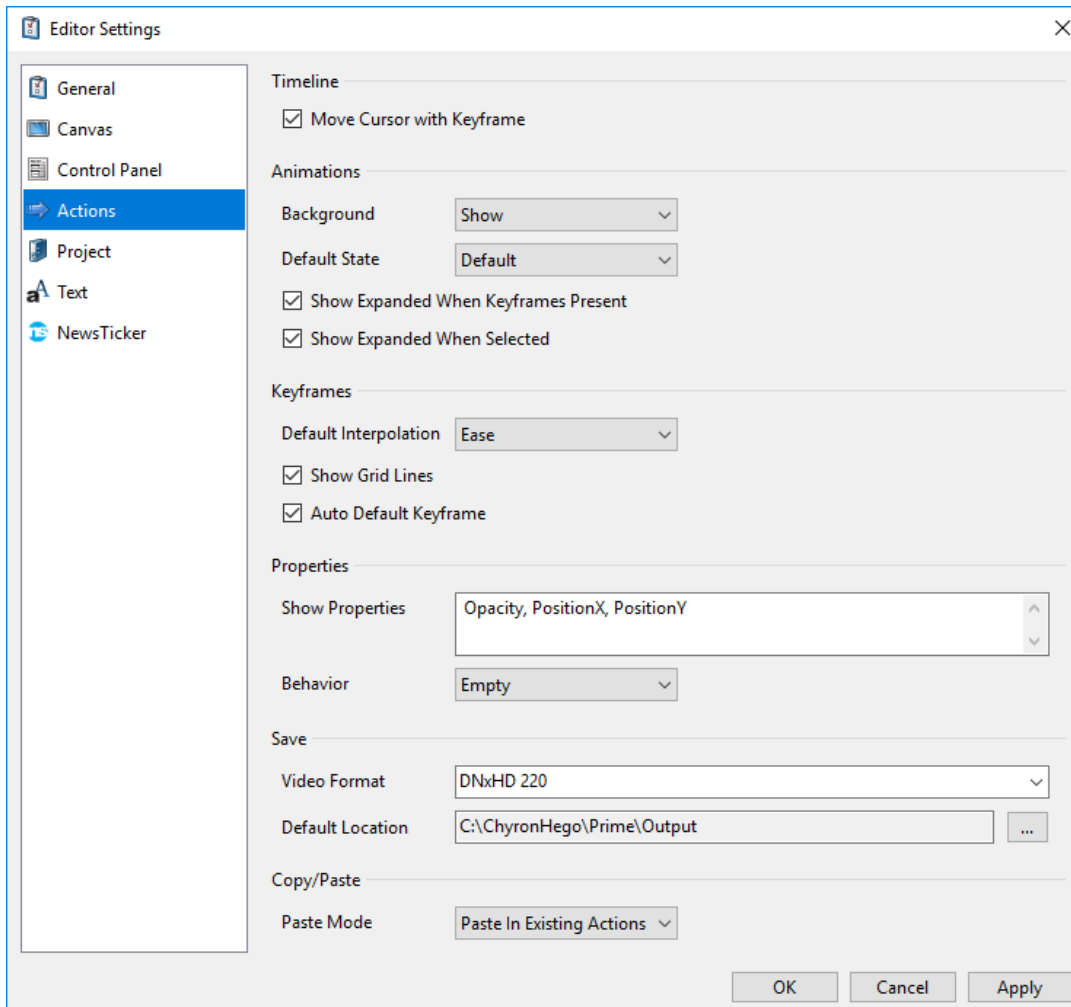

Timeline

Move Cursor with Keyframe:

Animations

Background:

Parent

Default Action 1 Add Action

Action Triggers: Triggers (0) ...

Animation Timeline: 0:00 1:00

Property	Value	0:00	1:00
Text 1			
◇ Opacity	100.0		
◇ ▷ PositionX	640.0		
◇ ▷ PositionY	515.6	Yellow Keyframe	Grey Keyframe

Hide

Default Action 1 Add Action

Action Triggers: Triggers (0) ...

Animation Timeline: 0:00 1:00

Property	Value	0:00	1:00
Text 1			
◇ Opacity	100.0	Yellow Keyframe	Grey Keyframe
◇ ▷ PositionX	640.0		
◇ ▷ PositionY	515.6		

Show

Default Action 1 Add Action

Action Triggers: Triggers (0) ...

Animation Timeline: 0:00 1:00

Property	Value	0:00	1:00
Text 1			
◇ Opacity	100.0	Yellow Keyframe	Grey Keyframe
◇ ▷ PositionX	640.0		
◇ ▷ PositionY	515.6		

Default State: Expanded or collapsed

Show Expanded when Keyframes Present:

Show Expanded when Selected:

Keyframes

Default Interpolation: Sets the default keyframe behavior.

Show Gridlines: Show or hide canvas gridlines

Auto Default Keyframes: Adds keyframes to the “Default” action when keyframes are created in other Actions. Example: add “PositionX” into the setting then create a new action and you will see “PositionX” in the timeline. Add as many properties as you need. Separate them by commas. “PositionX,PositionY,ScaleX”.

Default Ease Length: When a new “ease” keyframe is added, set the default ease to some value.

Properties

Show Properties: Define which properties you would like to be automatically added to the Timeline Editor when a new action is created.

Behavior

Never: If a second object of the same type is added to the Action the properties listed will not show.

Empty: Remove properties defined in the “Show Properties” that have no keyframes.

Selected: Shows the properties with or without keyframes from the selected object.

Always: Always show the properties when the object has no keyframes.

Save

Video Format: Select the video format when saving actions to a clip file. Right clicking on the Action tab allows users to record the animation to file.

Action is saved using first output channel and certain restrictions apply based resolution of the Output Channel

4K Support. Only DNxHR codes supports resolution higher than 1080p
Interlace Support. DNxHD does not support.

Save Action to Clip will only honor auto follow source mode on the first frame of the selected action. If autofollow expressions (including position and size) are evaluated after the initial keyframe then the render will not evaluate. For example if the source object's position or size changes during the animation, then autofollow will not evaluate on the target object.

Default Location: Set the folder where Action clips will be stored

Copy/Paste

Paste Mode



Create New Actions:

Paste in Existing Actions:


Node Coloring

Enable color coding in the scene tree will also color code the shaded areas above/


To enable Node Coloring right click on the toolbar left of the Scene Node where the “Lock” icon is located.

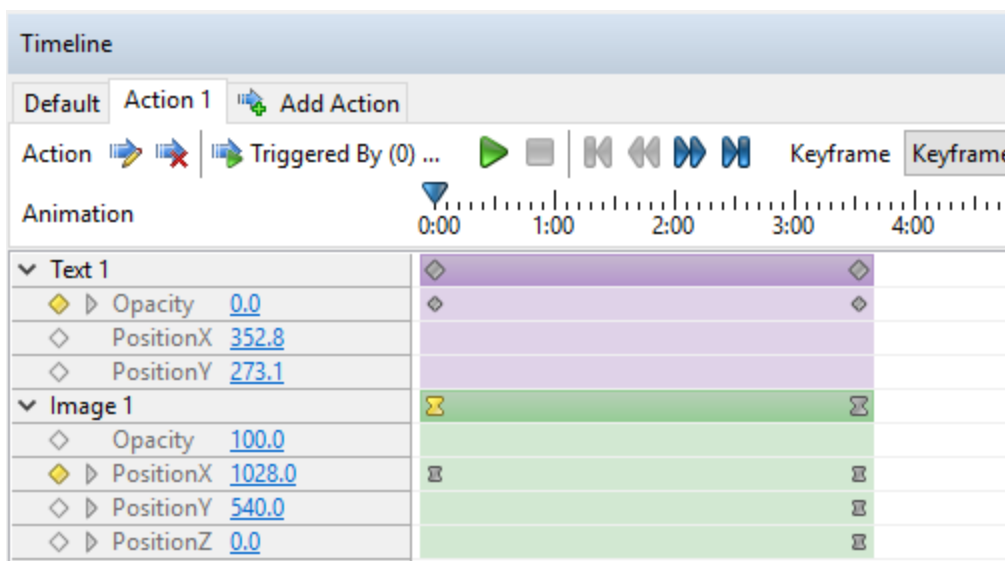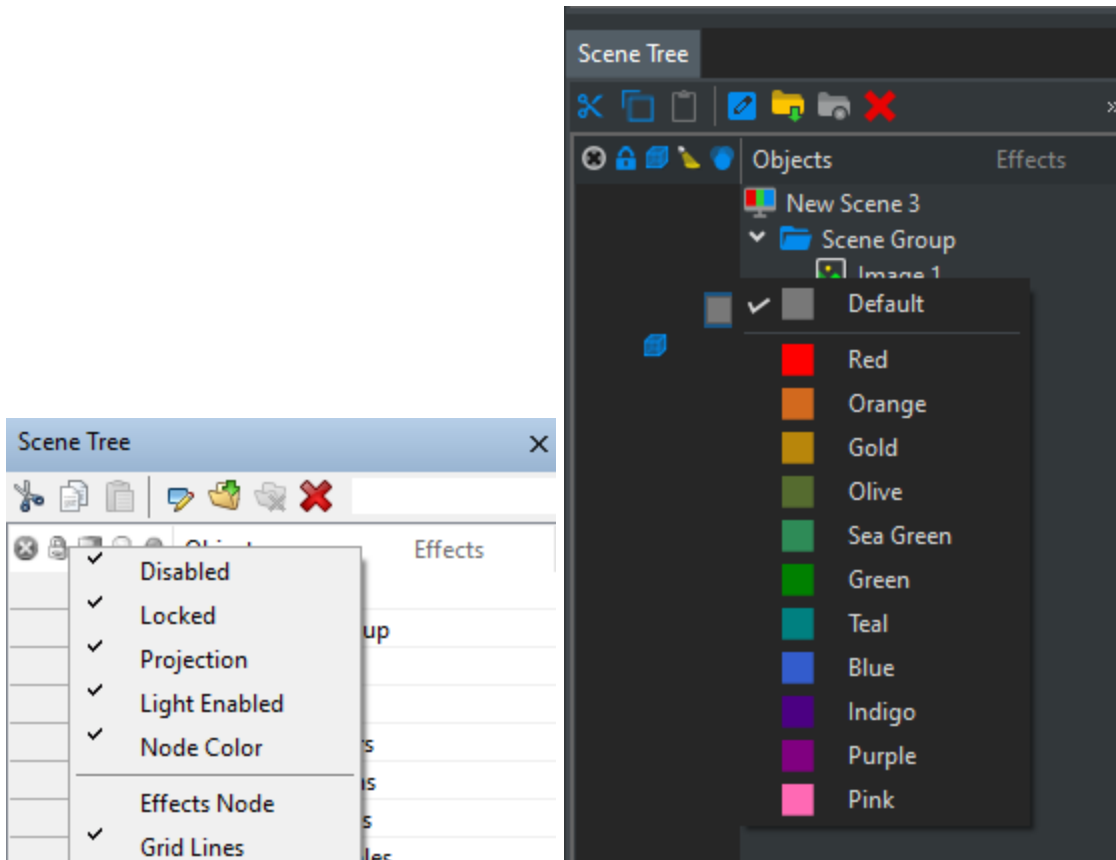

Project Settings

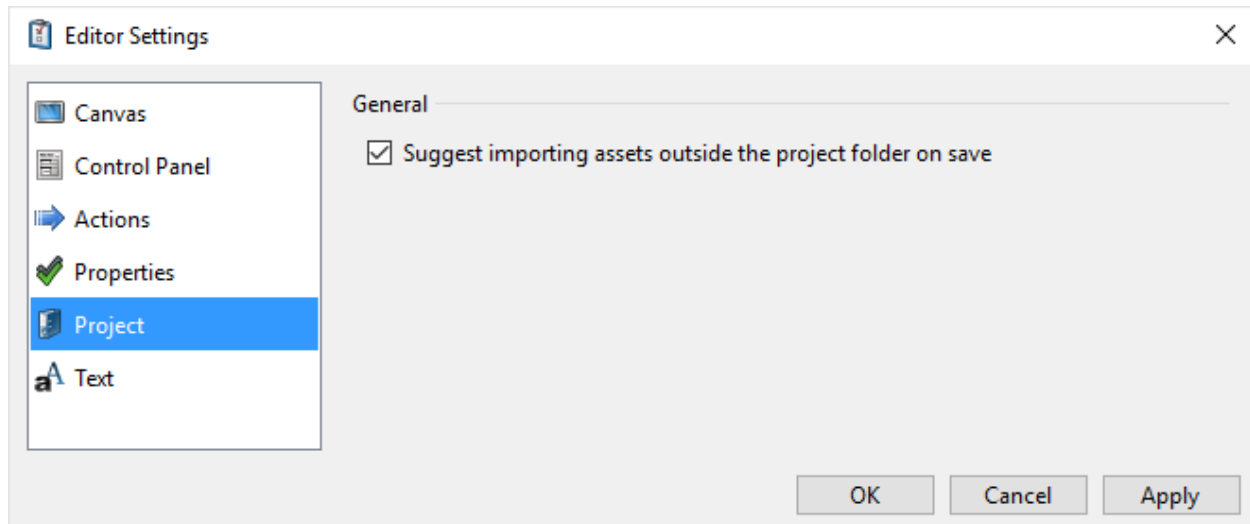

Text Settings

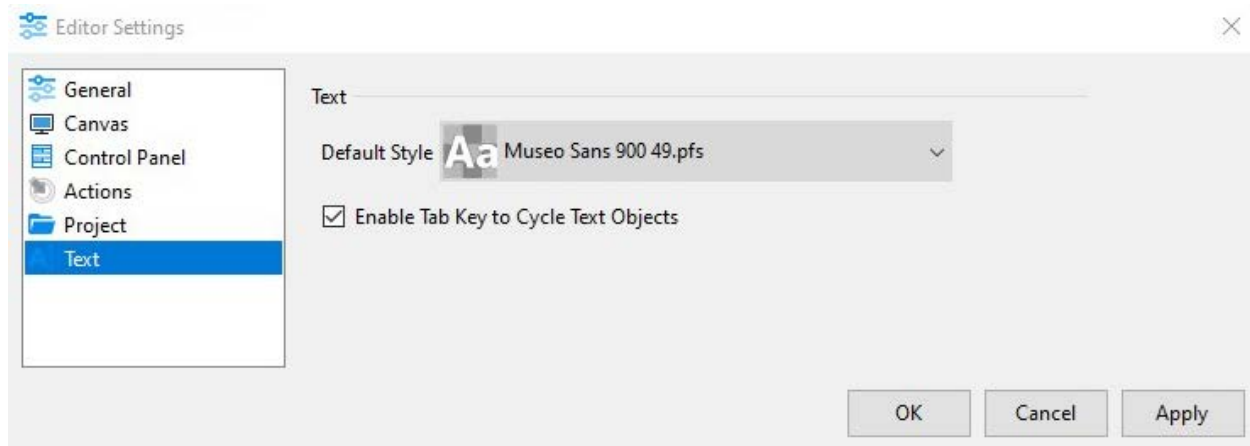

Default Style


Select from the list of Styles (Refer to the “Text” section on Styles). This style will be the default style each time a new text object is added to your scene.

Enable Tab Key to Cycle Text Objects

With this option enabled the tab key will cycle to the next text object in the scene tree and automatically places focus in the properties text field. This allows you to quickly and easily update text fields within your scene in Prime Designer. Focus must be on either the Scene Tree, Canvas or Text Editor for this feature to function. Shift Tab cycles to previous text objects.

Canvas Properties

Axis Mode

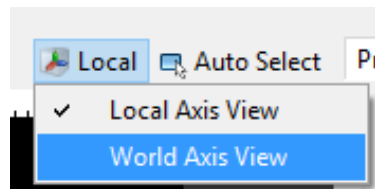

Toggles between **Local** and **World Axis View** modes.

World Axis View: When you move an object using this coordinate system, you are moving it relative to the space of the viewport.

Local Axis View: Uses the coordinate system of the selected object.

Auto Select


Toggles between **Auto Select** and **Lock Selection**

Auto Select: The active selection changes to where the user clicks on the Canvas.

Lock Selection: The active selection is persistent regardless of where the user clicks on the Canvas. Changing focus is done on the Scene Tree.

Selecting Overlapping Objects

Right-clicking on the Canvas at the point where two or more objects overlap will display a context menu of the overlapping objects. Objects with the same name are not distinguished in this menu.

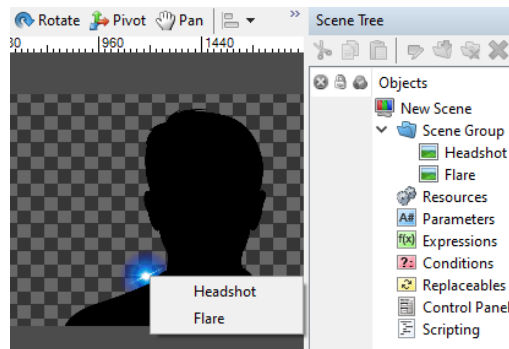


Alt+left click at the overlapping area will cycle through the overlapping objects.

Pan & Zoom


Use the “-“and “+” buttons on the slider control or your mouse wheel for zoom control.


Hold the middle mouse wheel down to pan the canvas. Zoom will “Zoom to Mouse”

Show Wireframe-Normals-Key

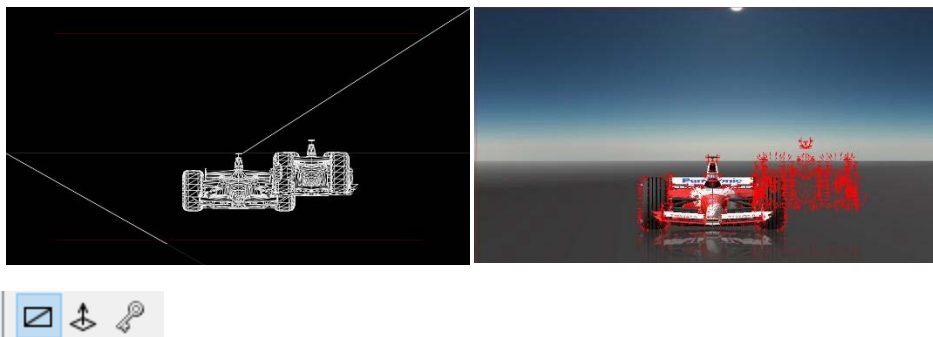


Show Bounding Box-Manipulators

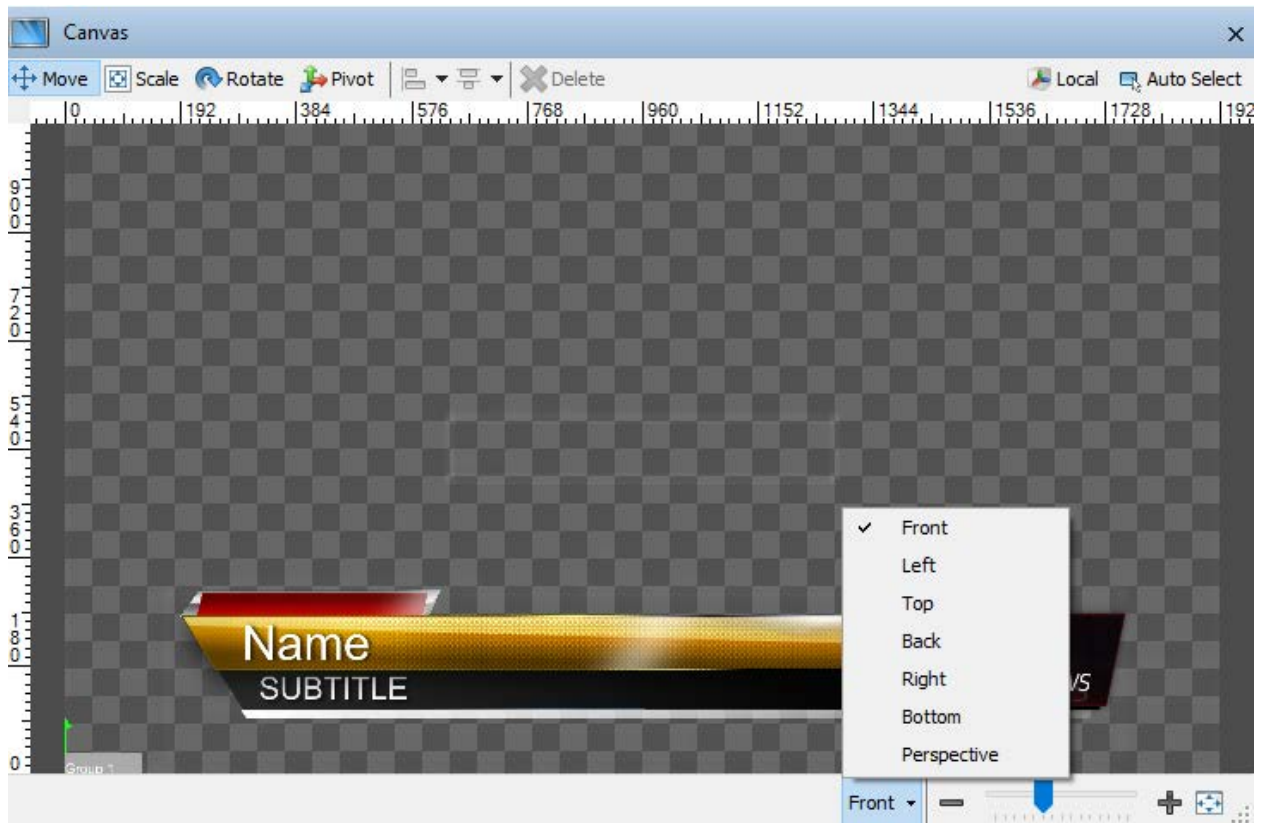

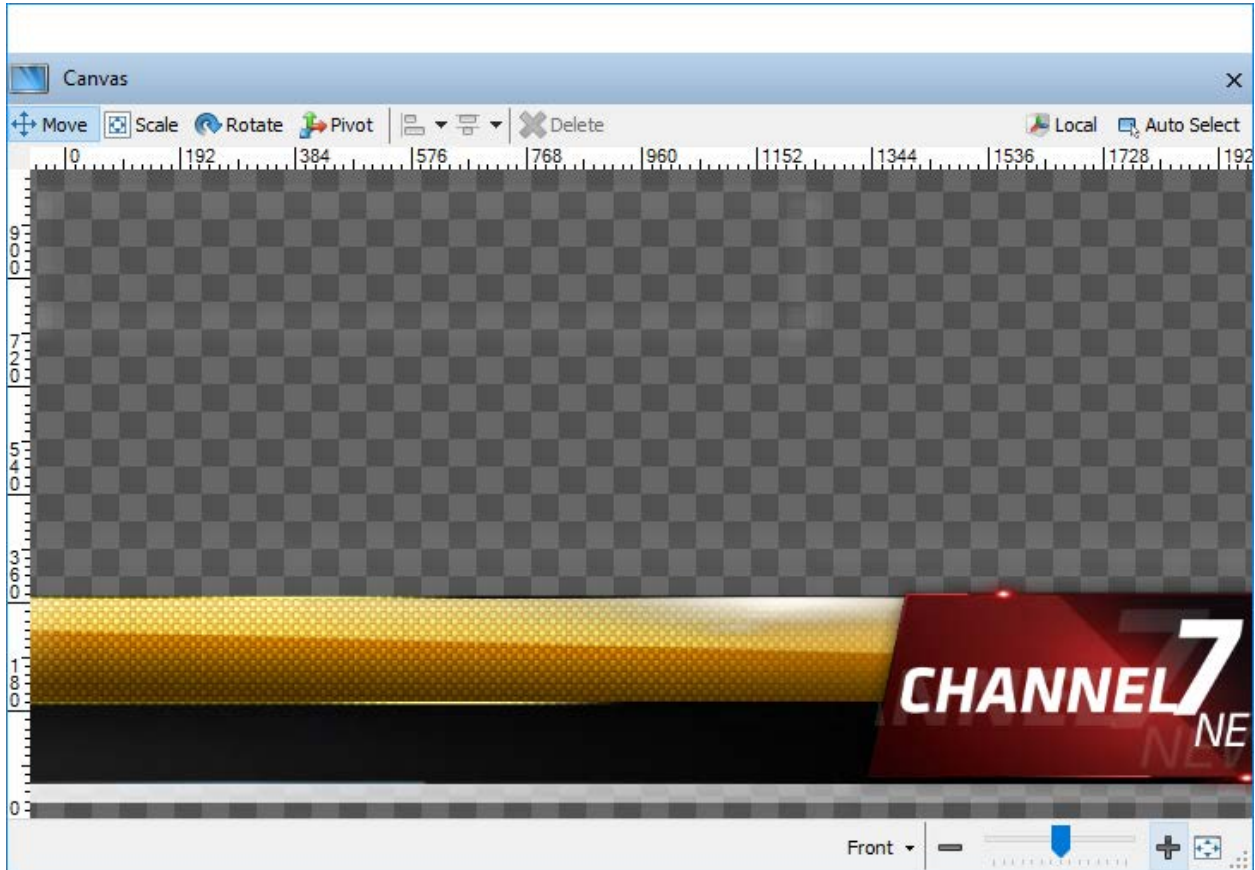


Custom Canvas Resolutions

This property is part of the “Scene/Resolution” property.

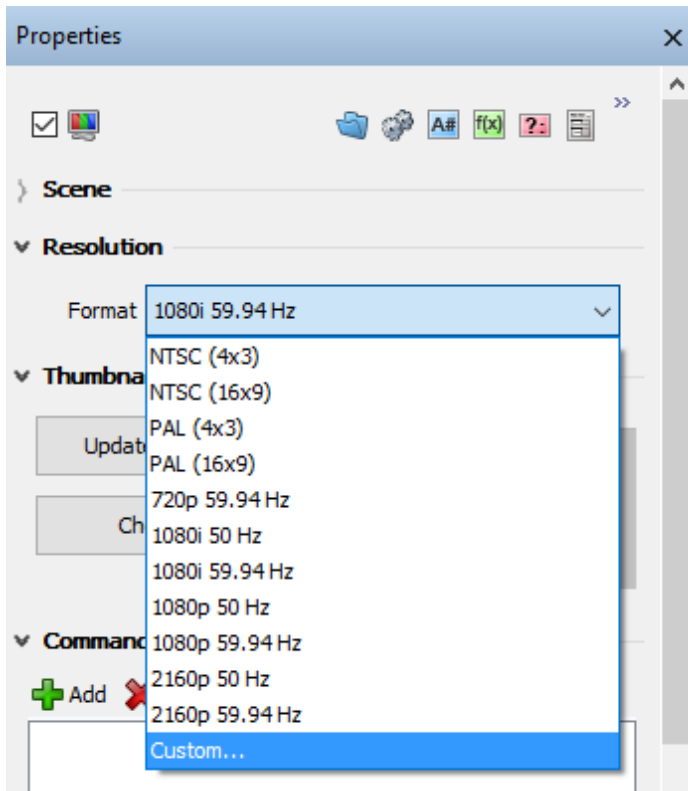


Selecting “Custom” will bring up the following dialog:

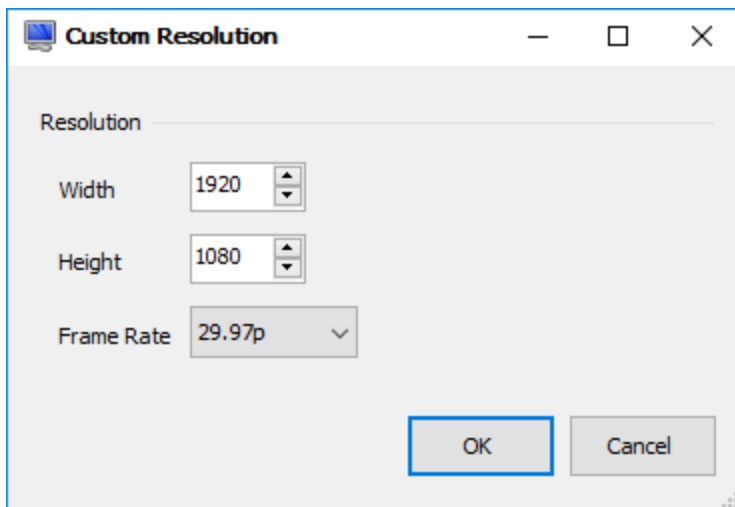


Any Custom resolutions set in the “Playout Configuration” will be enumerated in the Canvas Resolutions list automatically and vice versa.

Playout Configuration:

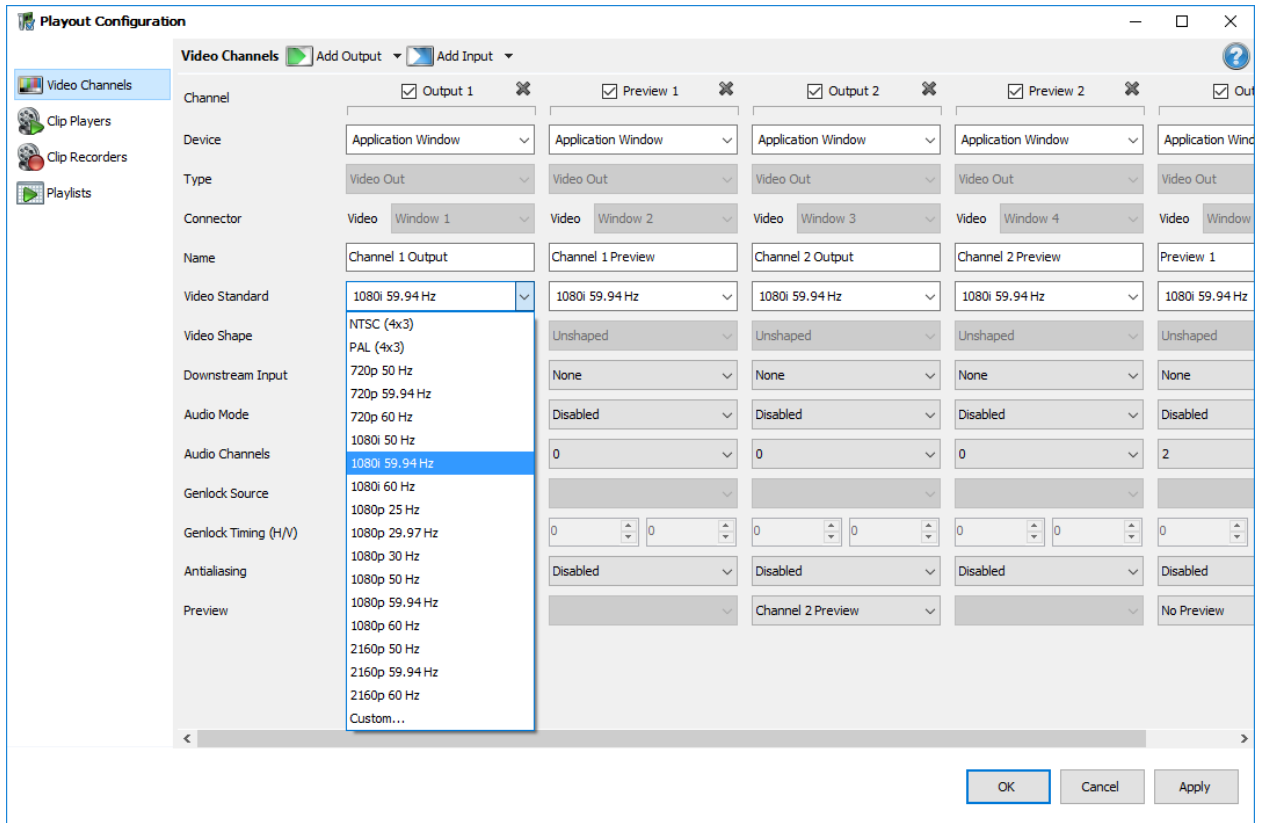

Scene Properties

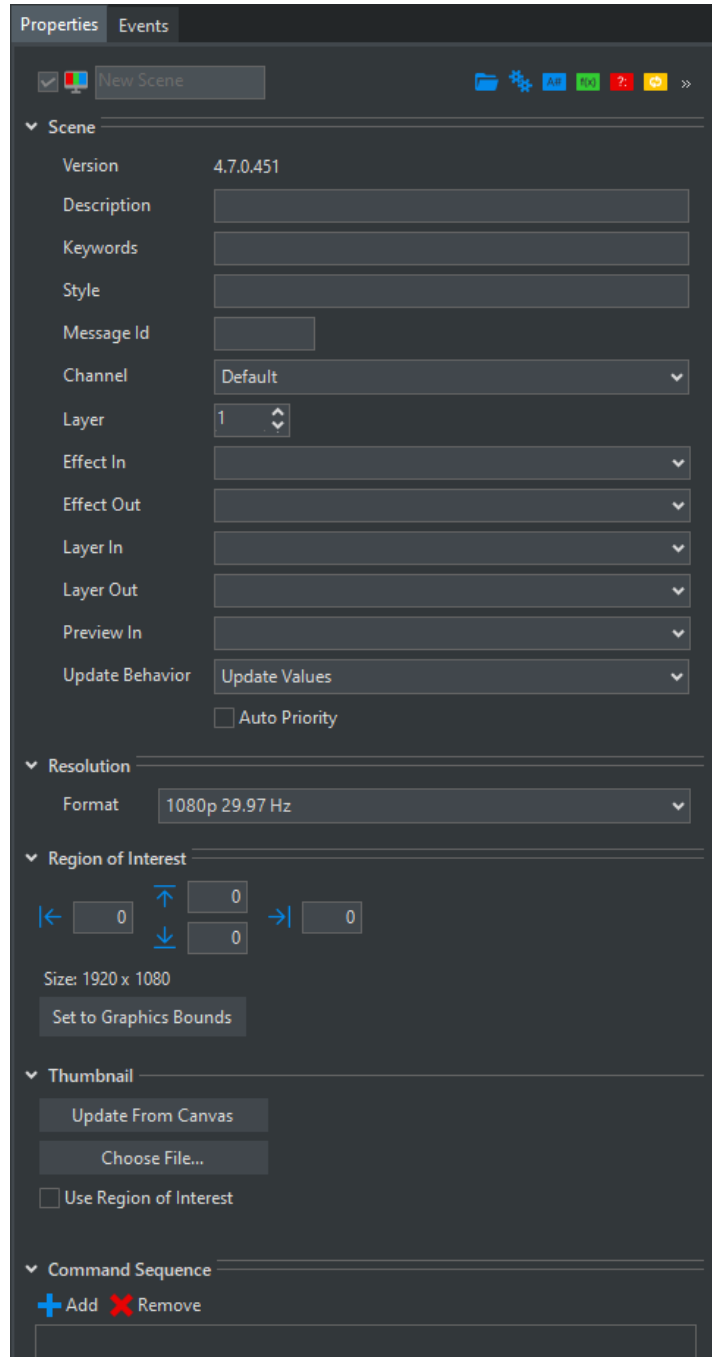

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

The following scene properties are displayed:

- **Description** – The user may enter a simple description of the scene
- **Keywords:** Add metadata to search for scenes
- **Style:** Can be linked to a CAMIO context and changed in LUCI. See Style Sheets for more.
- **Message Id** - Messages recorded from this scene will start recording at the specified location or the next available location. When a message is read, PRIME will read in the base message and fulfill the template with the data from the message.
- **Channel**-On recall the scene will play to the defined channel
- **Layer**-On recall the scene will be positioned in the defined layer on output
- **Effect In:** When the scene plays use these triggers in the trigger list as the Effect In. Usually it's just an Action or Condition to effect in
- **Effect Out:** Execute these triggers when the scene transfers from Program to Preview
- **Layer In:** Triggers when a scene in Preview plays to Program replacing another scene in the same layer. This supersedes the “Effect In”.
- **Layer Out:** Triggers when a scene in Program is played off by an incoming scene in the same layer. This supersedes the “Effect Out”.
- **Preview In:** Executes when a scene is loaded into Preview. The Defined “Effect In” will still execute when the scene is played. This is useful for LUCI previews in a CAMIO workflow.
- **Update Behavior:** “Update Values” will update items on output and NOT transfer the entire scene. “Update Scene” will transfer the entire scene.
- **Auto Priority** - An incoming scene takes priority over an outgoing scene. To adjust the priority, uncheck Auto Priority and change the value in the Scene Properties > Render section of the Scene Group. The default is 2000. Auto Priority will override the Z position of multiple scenes in the same channel.
- **Resolution** - Set the resolution format for the scene.
- **Region of Interest** - Set the Region of interest for the scene that can be used in designer to crop; save image and save clip files. (0,0,0,0 for Left, Top, Right and Bottom bounds is fullscreen resolution with no cropping applied).
 - Size: Reward only text for final size of defined region of interest
 - Set to Graphics Bounds: Selecting this button will update region of interest values to calculate the utmost bounding edges for top, left, bottom and right of all objects combined in the scene.

- **Thumbnail** - Set the thumbnail that will be used in PRIME's scene browser.
 - Use Region of Interest: Enable this to crop the thumbnail to the defined region of interest in the scene.
 - *This will only be applied to Prime's scene browser and does not apply to LUCI thumbnails and previews.*


Command Sequence:


The command sequence allows you to build a list of Trigger items to play out in a sequence:

Adding a Command allows you to choose an item from the Trigger list:

The right Green arrow indicates whether the item, after being executed, will move to the next item in the list. This is called "Follow Through". Some items, like Action, can ONLY be follow through.


The Command Sequence has its own API and can be controlled by a Condition, A script or from a Control Panel

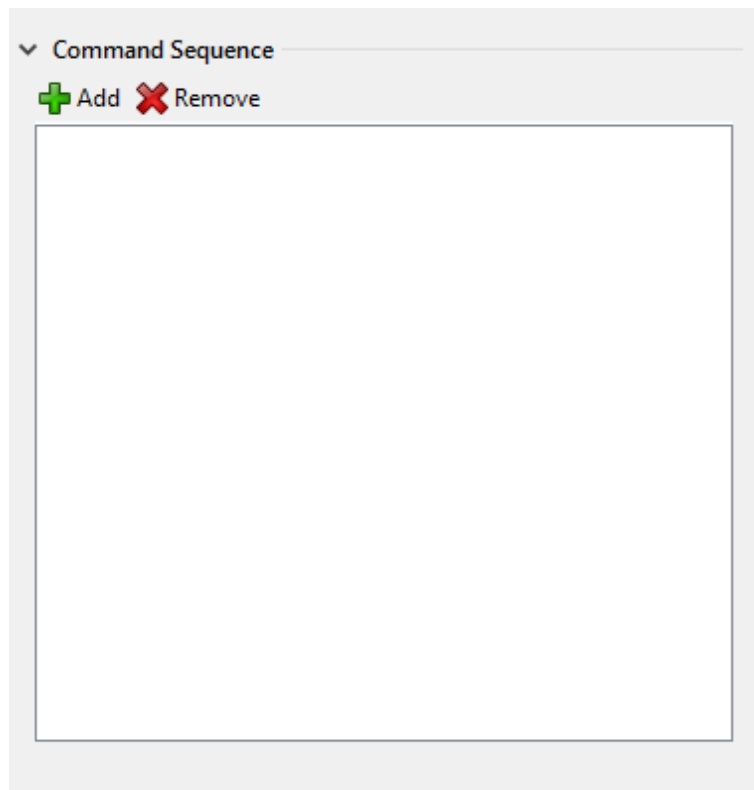

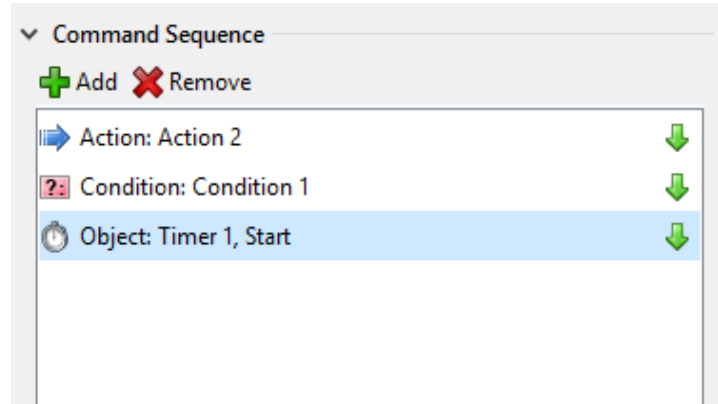


C# Script:


Scene.CommandSequence.Execute

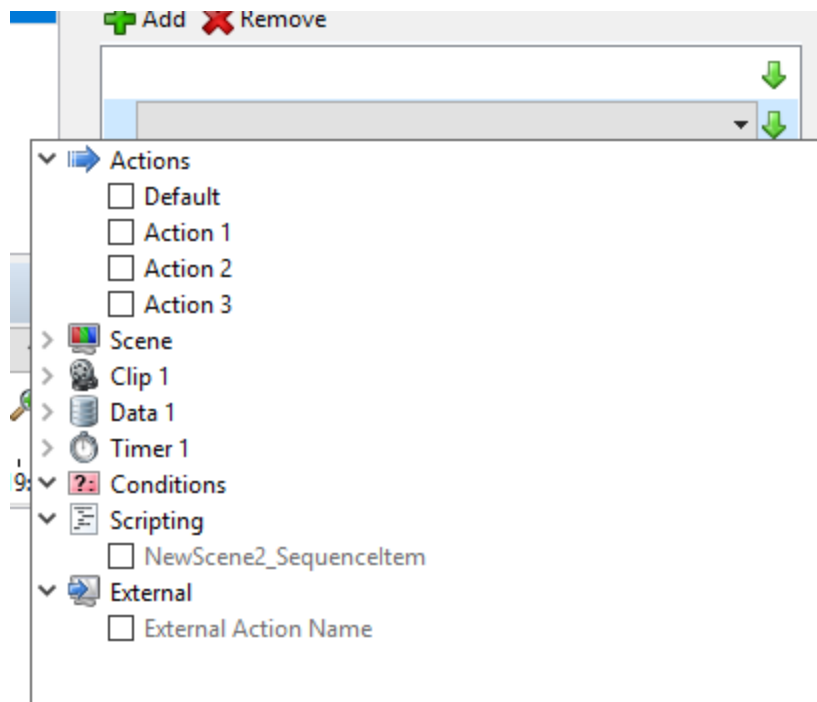

Condition:

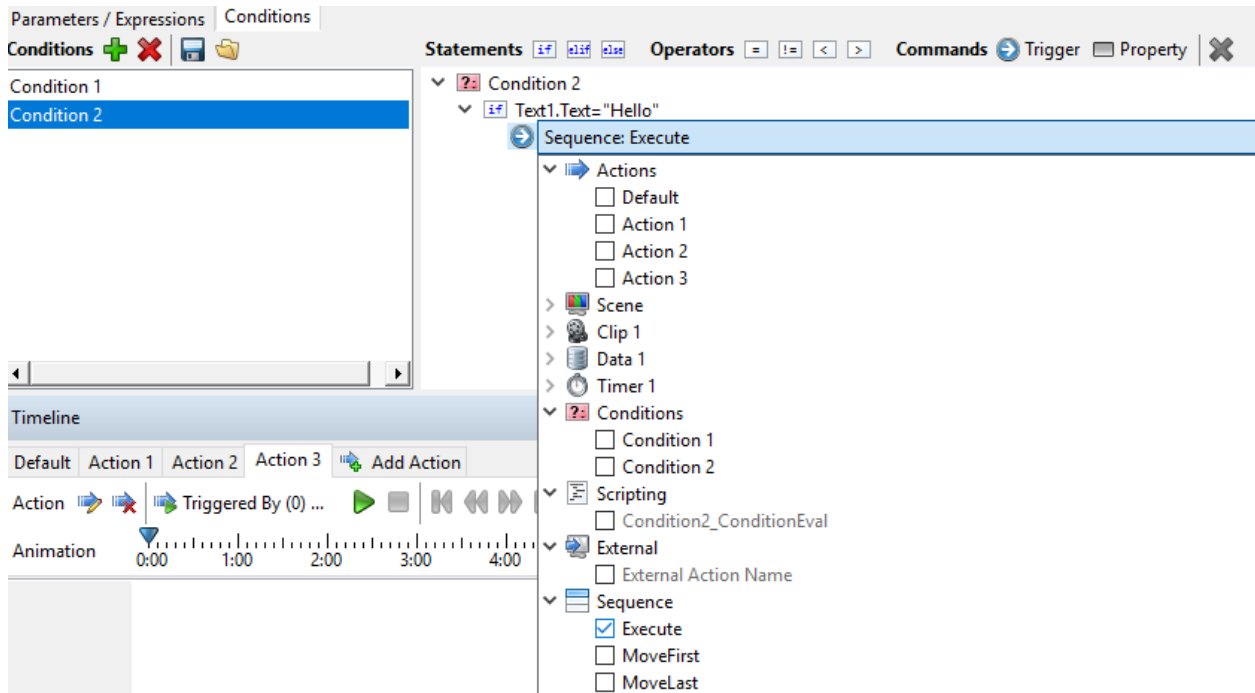


Control Panel:

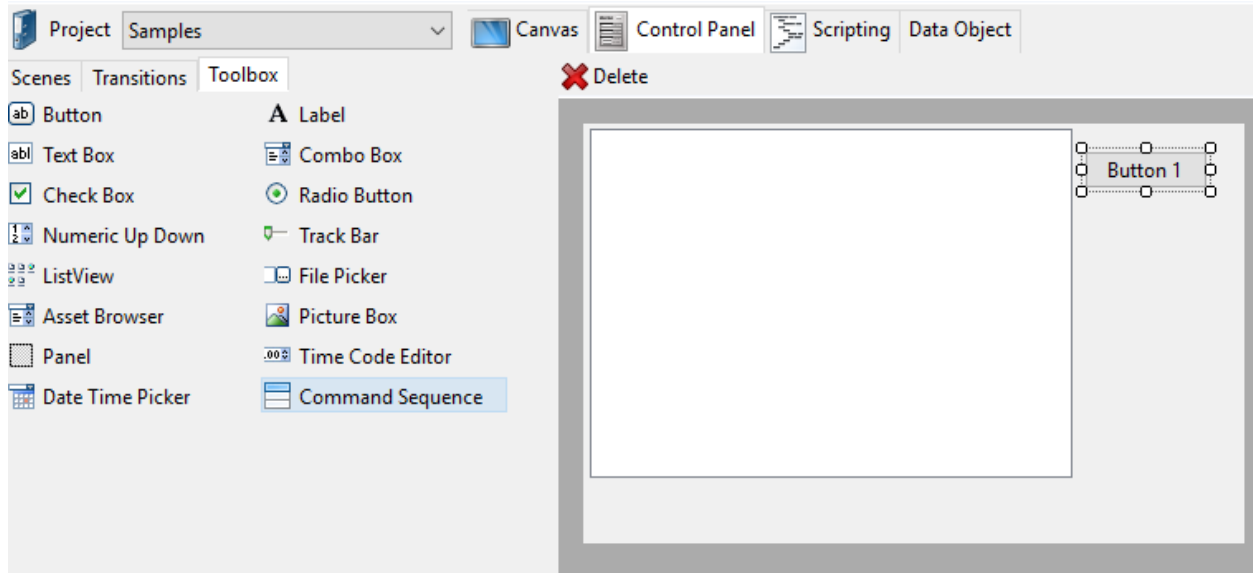


Scene Events


- **Before Load** - Executes once before a scene is loaded into either Preview or Program
- **Effect In** - Triggers when a scene is transferred to Program. (See Layer In)
- **Effect Out** - Triggers when a scene is transferred from Program to Preview or Scene is closed. (See Layer Out)
- **Layer In** - Triggers when a scene in Preview plays to Program replacing another scene in the same layer. This supersedes the “Effect In”.
- **Layer Out** - Triggers when a scene in Program is played off by an incoming scene in the same layer. This supersedes the “Effect Out”.
- **Preview In** - Triggers when a scene is loaded into Preview. Supersedes the Effect In for Preview.
- **Before Load** - Triggers before a scene is loaded into Program
- **After Load** - Triggers once after a scene is loaded into either Preview or Program
- **Before Play** - Triggers before a scene is played from Preview to Program
- **After Play** - Triggers after a scene is played to output
- **Before Update** - Triggers before the elements of a scene are loaded.
- **After Update** - Triggers after the elements of a scene are loaded.
- **Before Stop** - Triggers when a scene is taken off Program
- **After Stop** - Triggers after a scene is taken off Program
- **Before Close** - Triggers before a scene is closed. (Cleared from both Preview and Program)
- **After Close** - Triggers after a scene is closed. (Cleared from both Preview and Program)
- **Style Changed** - Triggers when the scene’s **Style Property** is changed (See Style Property)

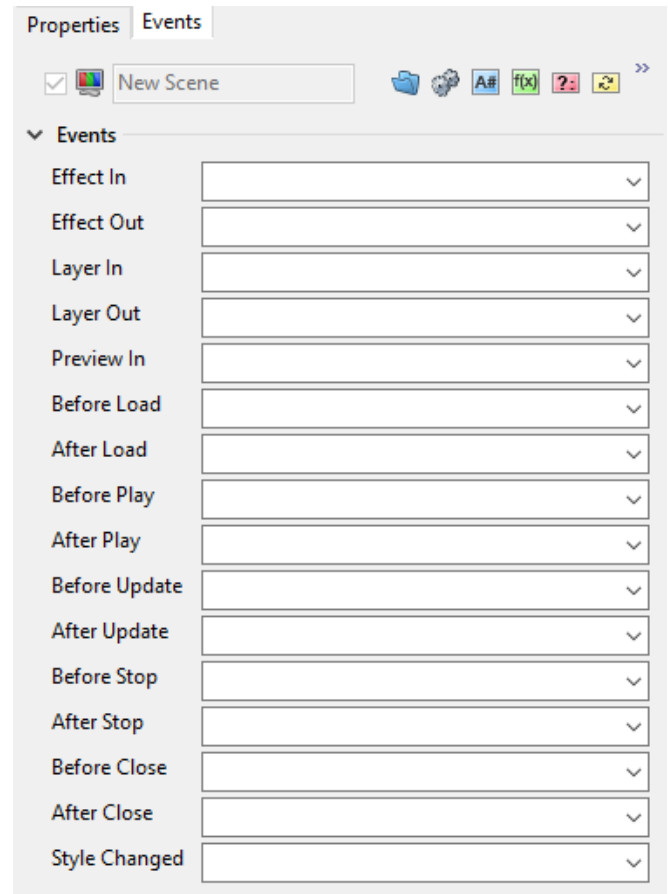


The "Load" sequence. Occurs only if you have a Preview.



The "Play" sequence for Effect In

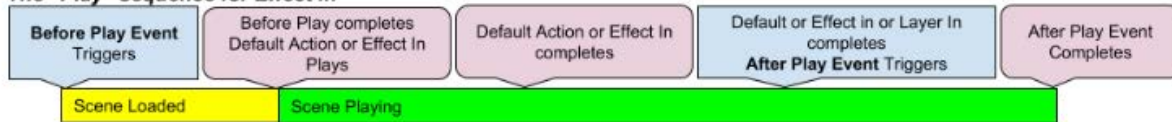



The "Play" sequence for Update In



The "Stop" sequence




The "Close" sequence



Opening a scene directly to output will trigger Before load, After Load, Before Play and After Play.


All of the scene events handlers can be used to attach any of the other objects methods in the scene. **EX:**Timer1.Start

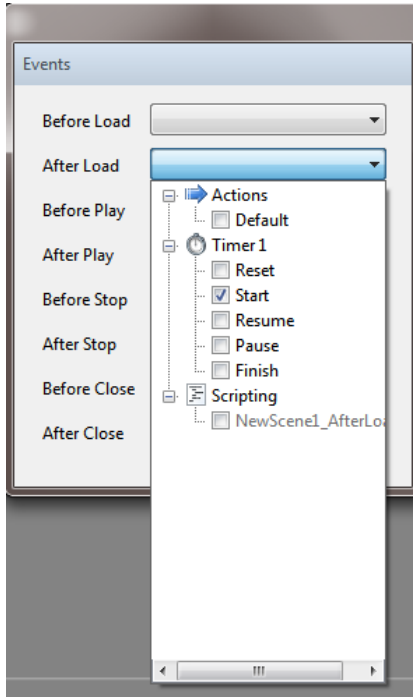

Example of assigning an “Effect In” and “Effect Out”:

Scene Objects


The Toolbox

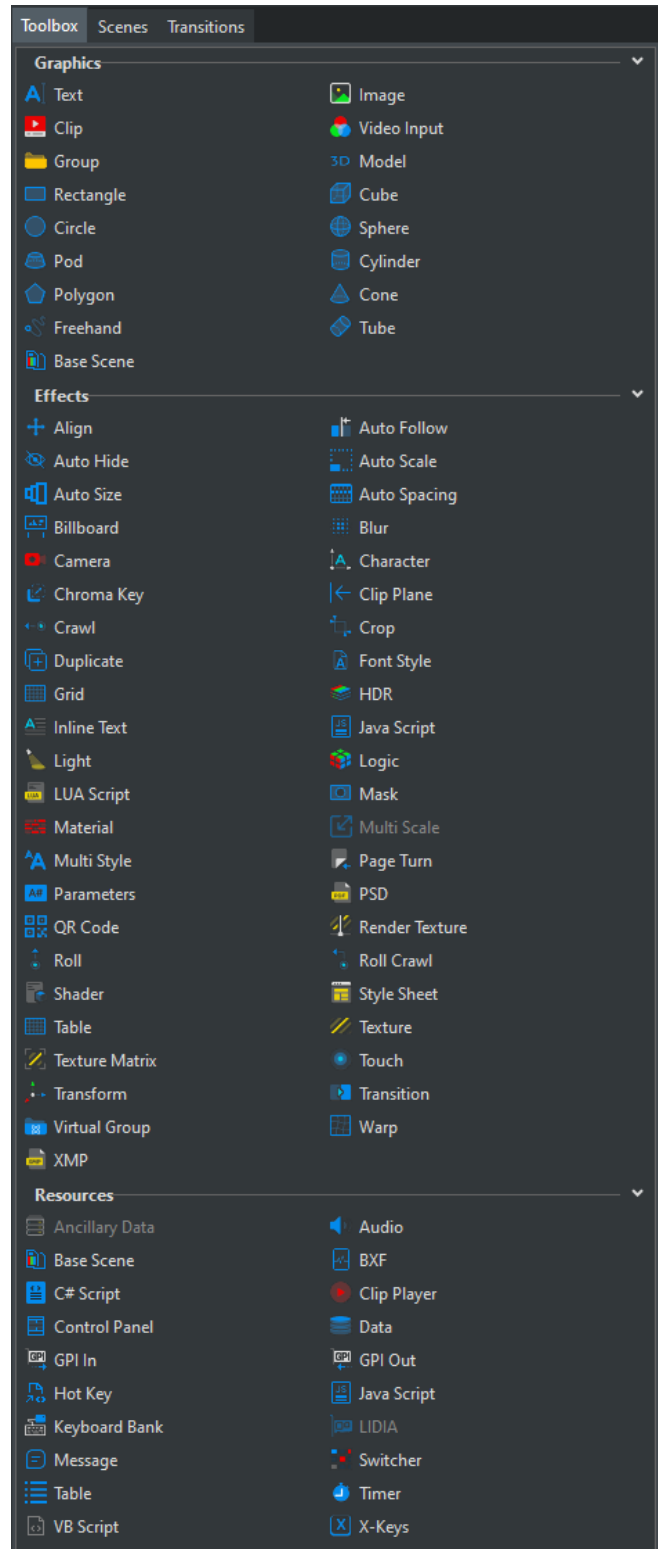


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Base Scene

Base scenes can be added as objects in a scene as well as a Scene resource. (See the “Resources” section).

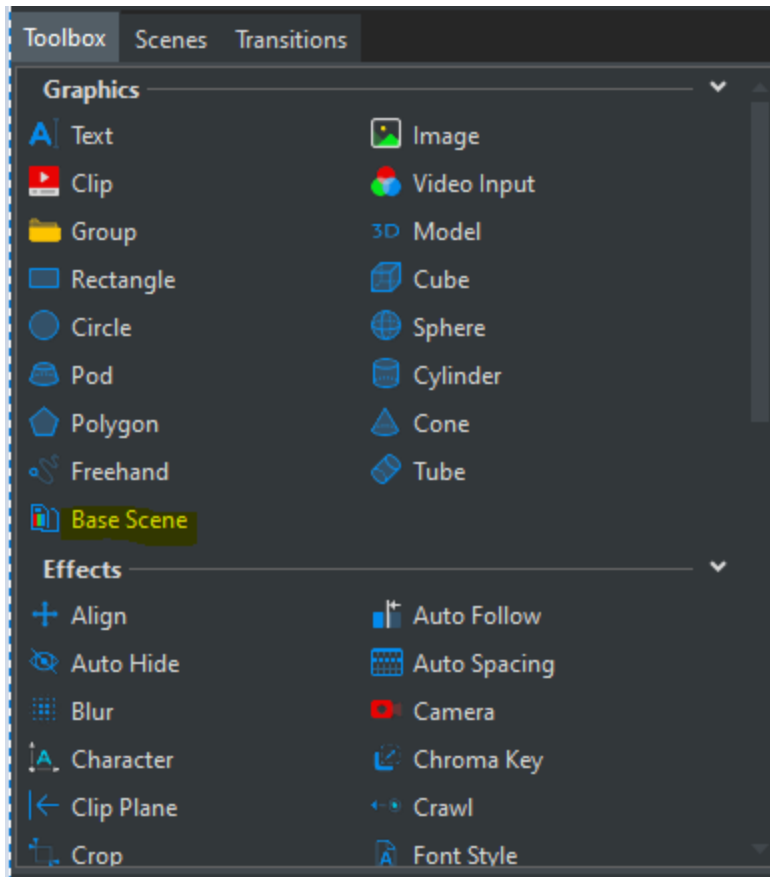


When Base scenes are added to scenes the Base Scene will be inserted into the current scene as a Scene child object. Control panel objects will be appended to the Control Panel.

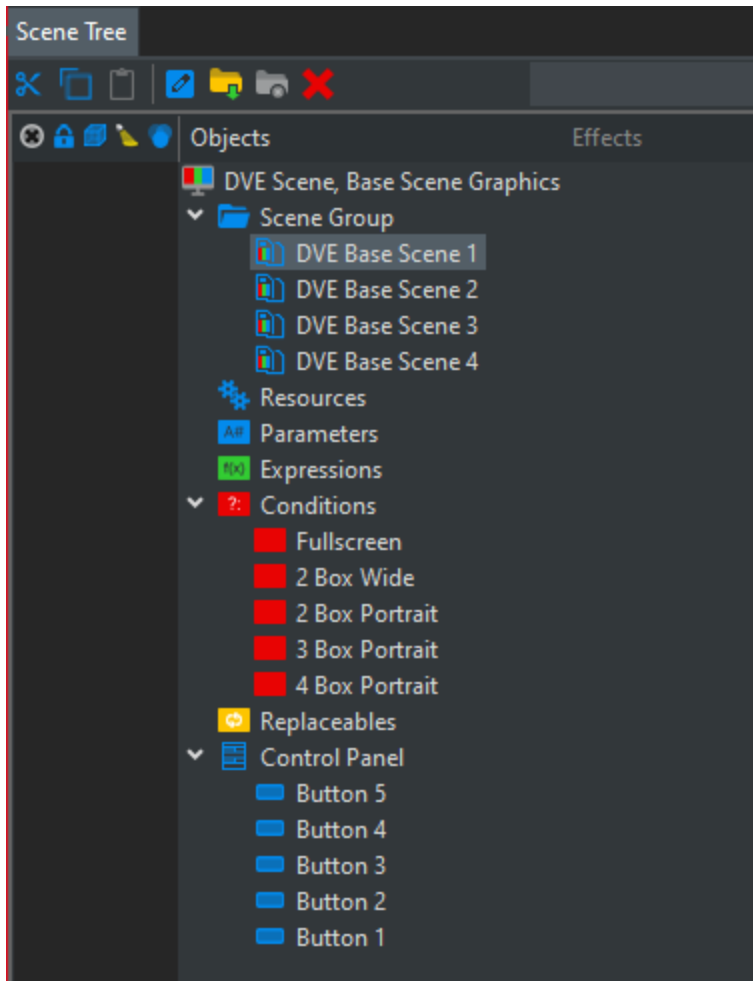

Base Scene Actions and Conditions become available in the Triggers list and through Conditions.

Base Scene Properties

Same as a normal scene.

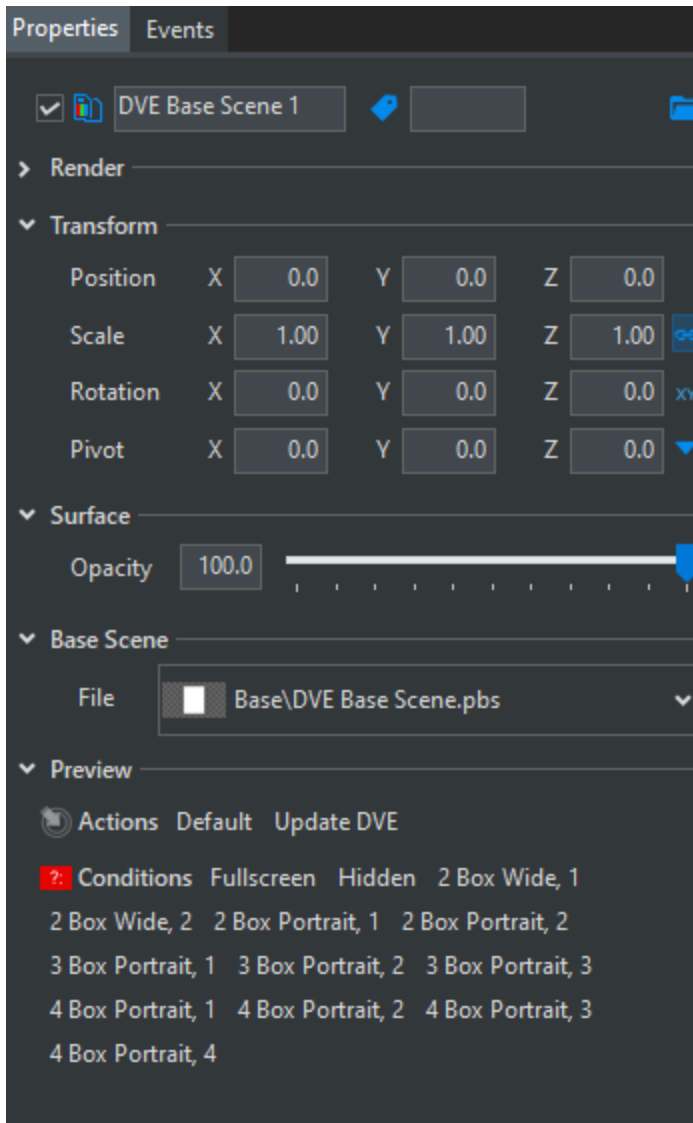

Circle Object


Render Properties

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Projection

•

- **Orthogonal** - Orthogonal projection.
- **Perspective local** - Central projection. The mid-point of projection is affected by an object.
- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens is tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

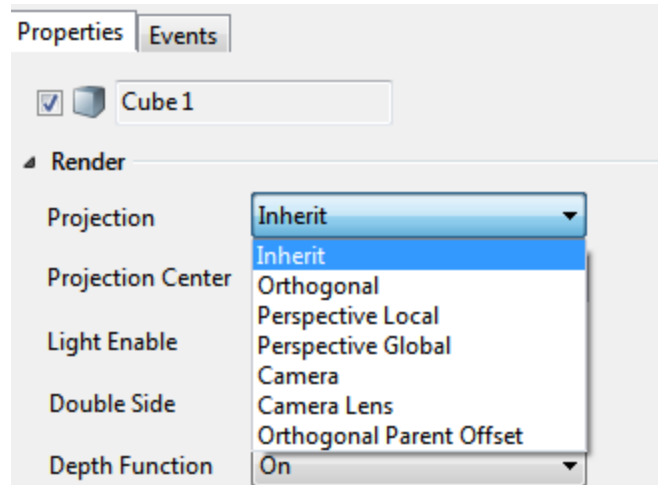

Projection Center

- **On** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects. Default value.
- **Always** - Fragment is rendered always independently of depth buffer.
- **Never** - Fragment isn't rendered ever.
- **Equal** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.

- **Less than or Equal** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.
- **No Write** - Similar to option "ON" with difference of Stealth attribute.
Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
- **Greater than or Equal** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!

Light Enabled

Double Sided

Depth Function

Priority

Transform Properties

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Surface Properties

Opacity

Circle Properties

Angle

Visible angle in degrees from 0° to 360°.

Value below 360° increases open angle in the circle.

Diameter

Circle diameter.

Hole

Creates a hole in the circle, making it into a ring.

Tessellation

Number vertices on the circle perimeter.

Higher tessellation makes the circle smoother but consumes more resources to render.

Alignment

- **CENTER** - Open angle is centered at the top (Y+).
- **Clock Wise** - Clockwise alignment. Angle starts at zero and opens clockwise.
- **Counter Clock Wise** - Counter-Clockwise alignment. Angle starts at zero and opens counter clockwise

UV Mapping

- **Planar** - UV coordinates projected linearly by a plane.
- **Polar** - U is angle, V is distance from center.

Clip Object

Only Intra frame clip formats are supported.


The term intra-frame coding refers to the fact that the various lossless and lossy compression techniques are performed relative to information that is contained only within the current frame, and not relative to any other frame in the video sequence

GTC is the native PRIME clip Format.

Supported formats in various wrappers include .MOV, DNxHD, PRO Res, XDCam, .mxf

DNx and ProRes both require a valid license for import, recording, payout and rendering. A warning prompt will display if these codecs are unlicensed.

All clips support two channels of audio ONLY XDCam

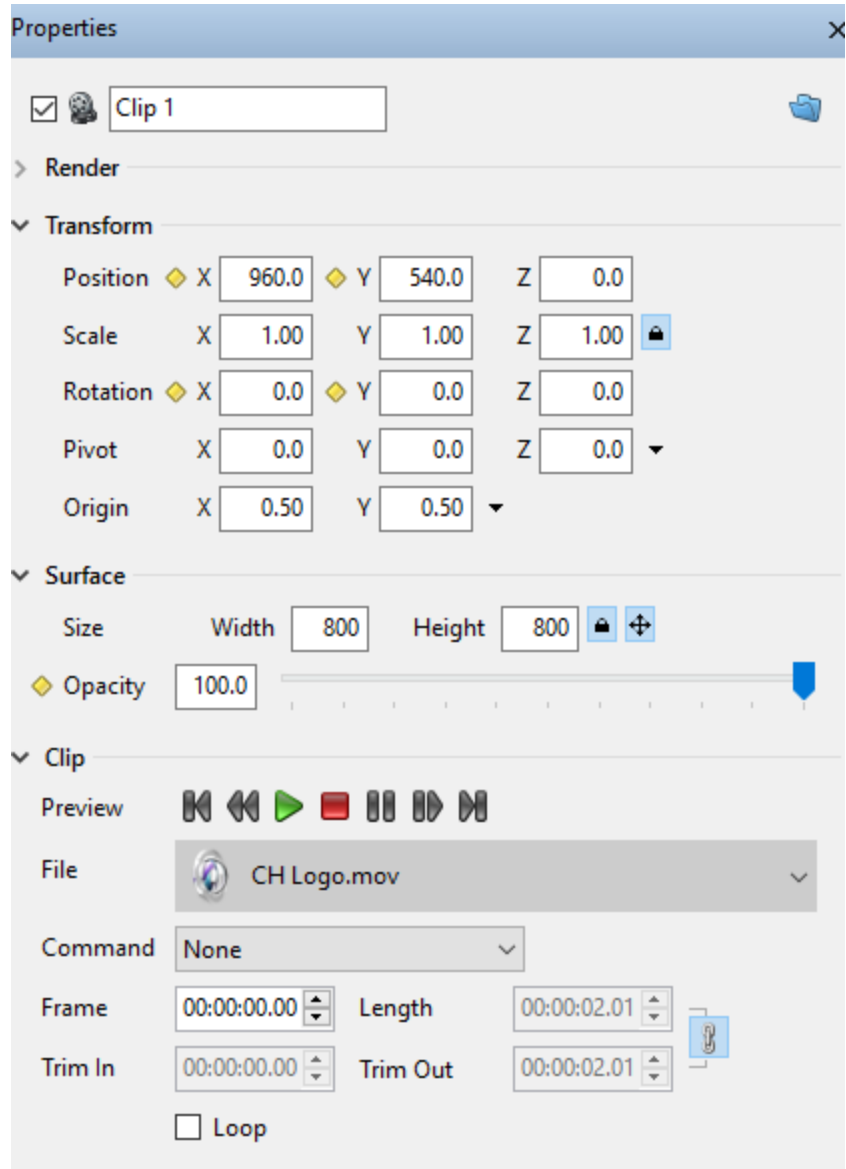

The following settings may be configured on the **Clip Properties** window:

- **Name** - The user friendly name to refer to the object throughout the application.

Render Properties

The **Render** subcategory includes:

- **Projection** – Projection mode. It is method how to map 3D objects to 2D screen plane.
 - **Orthogonal** - Orthogonal projection.
 - **Perspective local** - Central projection. The mid-point of projection is affected by an object.
 - **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
 - **Camera** - Projection in line with an external camera.
 - **Camera Lens** - Special kind of projection in line with an external camera. Only the lens are tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
 - **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

- **Projection Center** – Center of projection. (Position on the screen where all lines meet in infinity.)
- **Light Enabled** – Enable use of lights. Applies only to object with generated normals. This feature is ignored when using shaders.
- **Double Sided** – Double side visibility.
- **Depth Function**- Function for making decision whether it will write to scene according to z-buffer.
 - **OFF** - Disabled writing to depth buffers. Suitable for flat object which doesn't collide with any other objects.
 - **ON** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects. Default value.
 - **ALWAYS** - Fragment is rendered always independently of depth buffer.
 - **NEVER** - Fragment isn't rendered ever.

- **EQUAL** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.
 - **EQUAL** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.
 - **NOWRITE** - Similar to option "ON" with difference of Stealth attribute. Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
 - **GEQUAL** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!
-
- **Priority**- Rendering priority within a layer. The higher number the later the object gets rendered.
Use with care! Rather use Position.Z instead.
The priority change doesn't work well if objects use depth buffer.
 - **Texture Quality**
 - **Texture Wrap**

Transform Properties

The **Transform** subcategory allows for the manipulation of the Clip Objects **Position, Scale, Rotation** and **Pivot** along the XYZ axis.

- To keep the Scale Aspect fixed to its current dimensions, click the lock icon to Lock Aspect Scale.

Transform

Position	X	960.0	Y	540.0	Z	0.0
Scale	X	1.00	Y	1.00	Z	1.00
Rotation	X	0.0	Y	0.0	Z	0.0
Pivot	X	0.0	Y	0.0	Z	0.0
Origin	X	0.50	Y	0.50		

- **Position:** Position the object in X, Y or Z
- **Scale:** Scale the object in X, Y or Z
- **Rotation:** Rotate the object in X, Y or Z
- **Pivot:** Move the Pivot Position of the object in X, Y or Z
- **Origin:** Move the Origin Position of the object in X, Y or Z
-

Surface Properties


The **Surface** subcategory includes:

- **Size Width**
- **Size Height**
- **Opacity**

Clip Properties


The **Clip** subcategory includes:

- **File** – Clip file name
- **Command** –

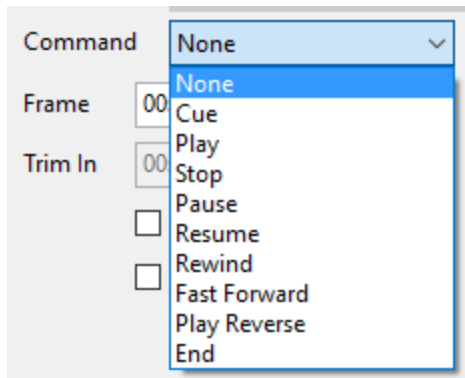

- End
- **Frame** – Current Frame number
- **Length** –length of the clip file
- **Trim In** – Trim the start of the clip. Marks the “In” point
- **Trim Out** – Marks the “out point” of the clip

- None
- Cue
- Play
- Stop
- Pause
- Resume
- Rewind
- Fast Forward
- Play Reverse

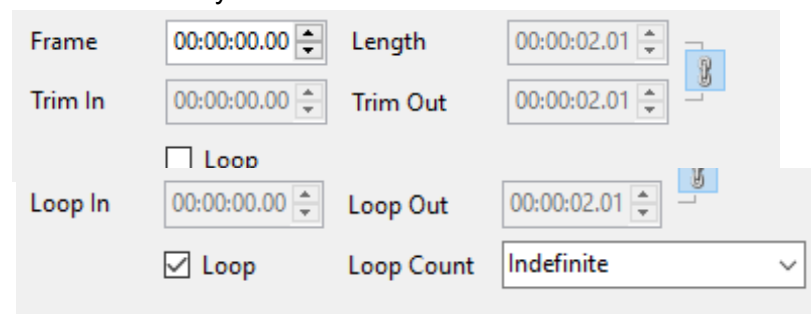

- **Loop** – Loop the clip any number of times or indefinitely.

Configure the loop as follows:

- To enable/disable the loop, check/uncheck the check box.
- To set the number of times that the clip loops:

Enter a number: Loops the specified number of times.

Indefinite: Select **Indefinite** to have the loop play indefinitely.


- **Loop Points:** Two loop points can be set, so that the clip begins from one point and loops back to a point different from the start point of the clip and loops back from a point different from the end point of the clip.
 - **Loop In:** Set the point back to which the clip loops, i.e., the loop start point.
 - **Loop Out:** Set the point back from which the clip loops, i.e., the loop end point. This action is not yet available
- **Hold last Frame**-Pause at last frame

Clip Events

There are a few ready to use events

- Finished
- Play Finished
- Reverse Finished

There are events for all the clip properties as well:

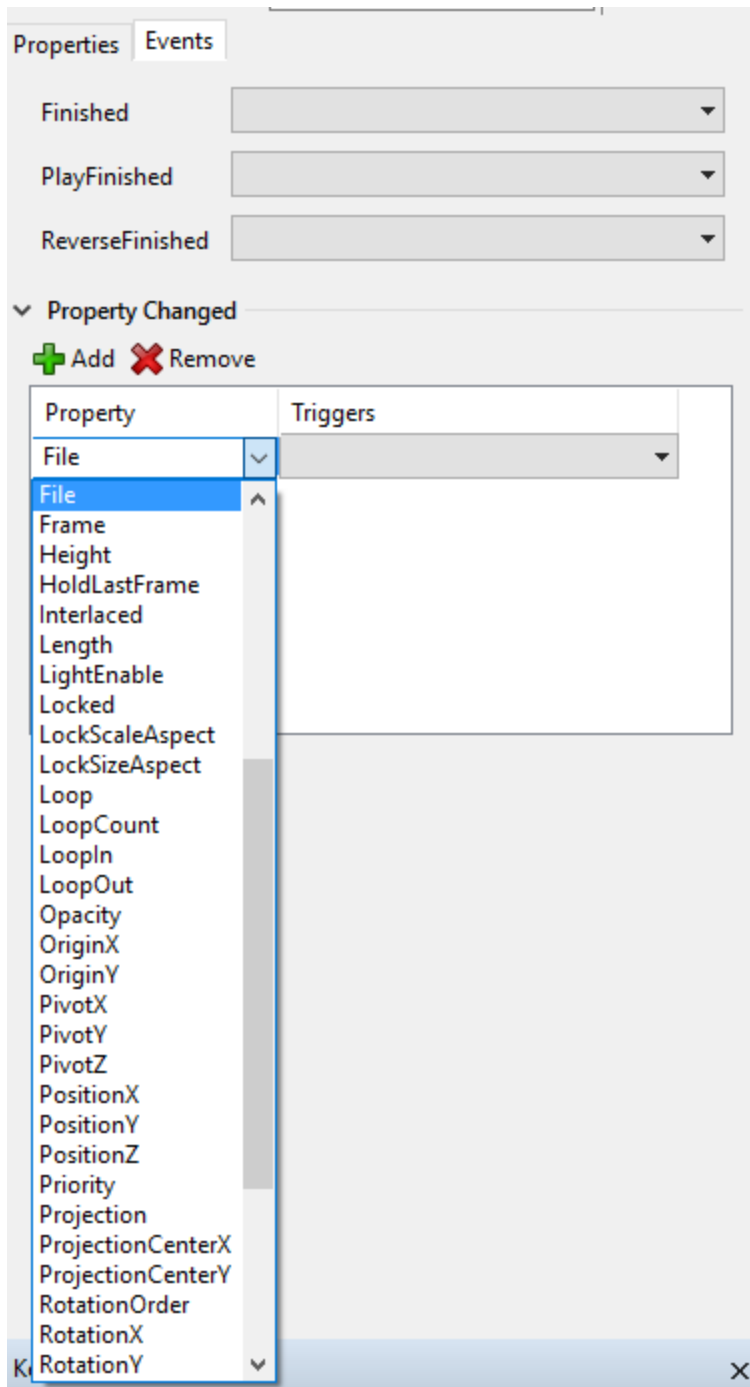


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)


The **Clip** subcategory includes:

- **Preview** – These controls allow you to preview clips




- **File** – Shows the clip browser starting in the “Clips” folder of the current project.

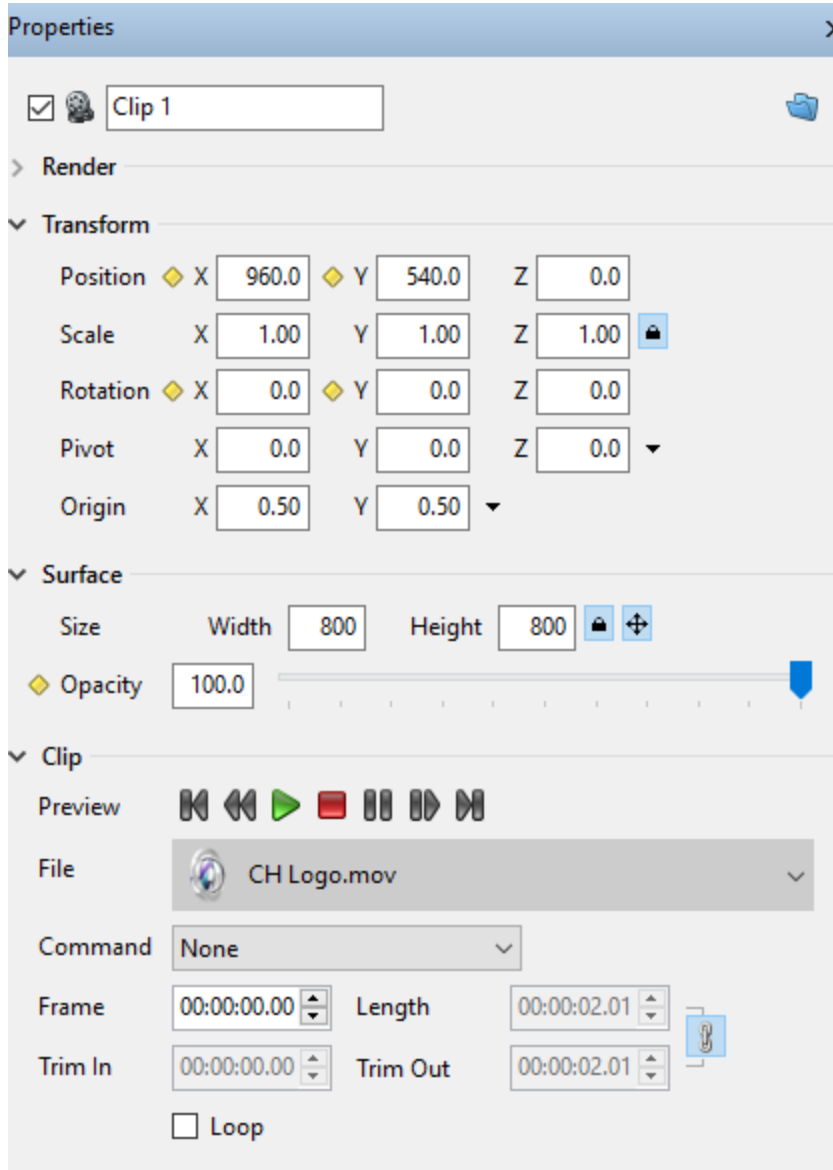


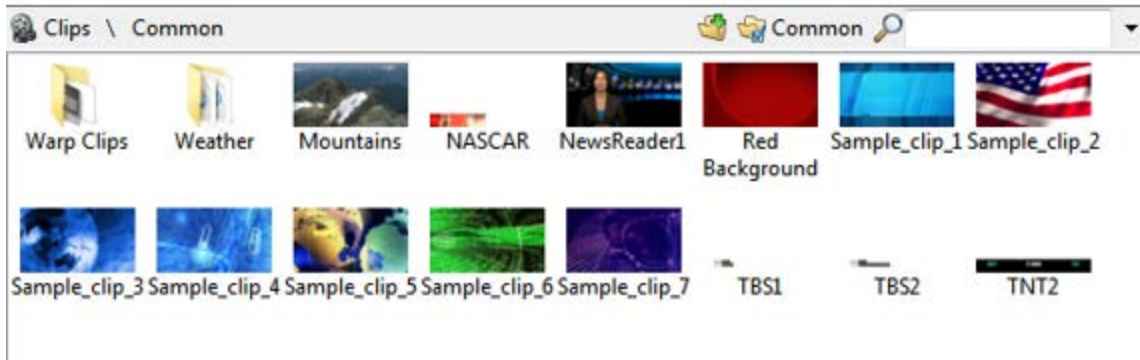

Clips with the “Warp” icon in the lower right hand corner are flagged as “Warp” clips that contain the UV Mapping information.

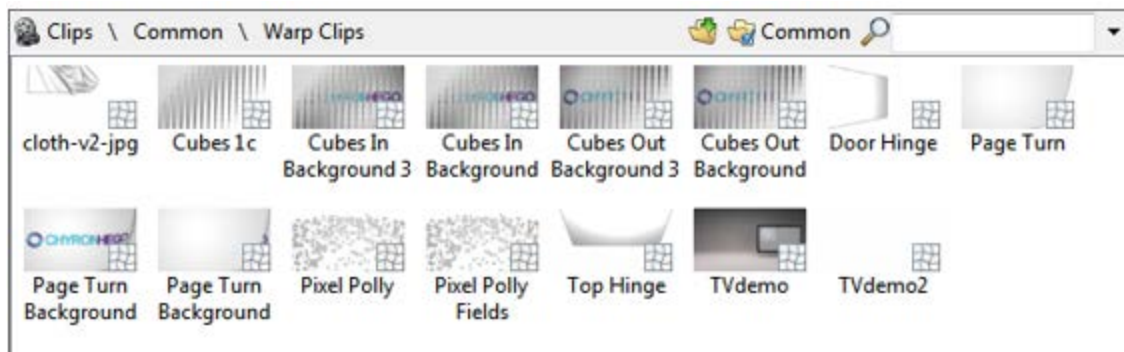


Clips with Key icon:

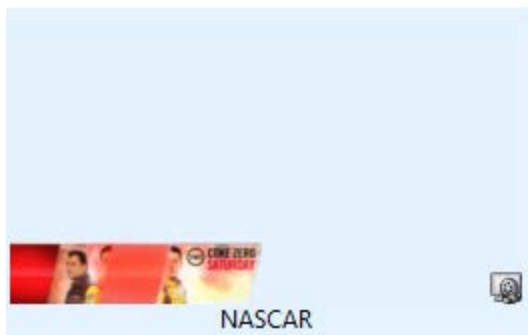

The **Events** subcategory includes:

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

- **Finished Event** - When the clip is finished perform something else available in the scene.

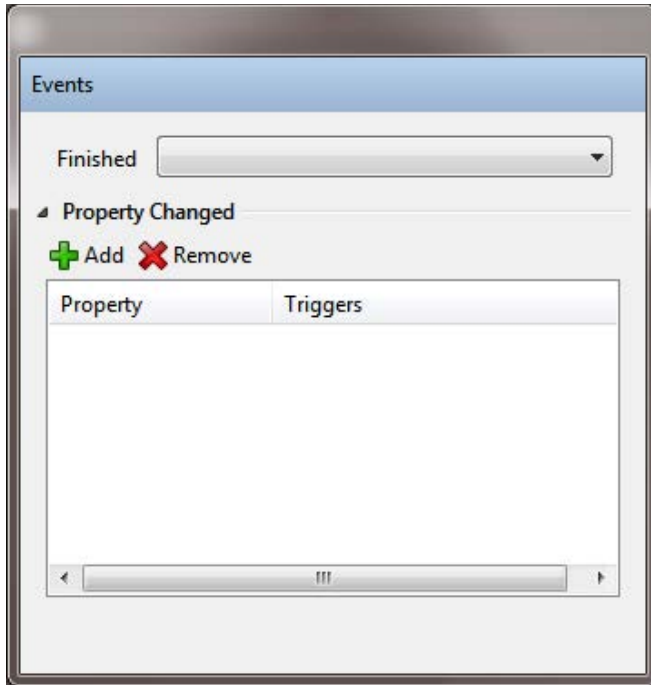


Cone Object

Cube Object

Render Properties

Projection

- - **Orthogonal** - Orthogonal projection.
 - **Perspective local** - Central projection. The mid-point of projection is affected by an object.

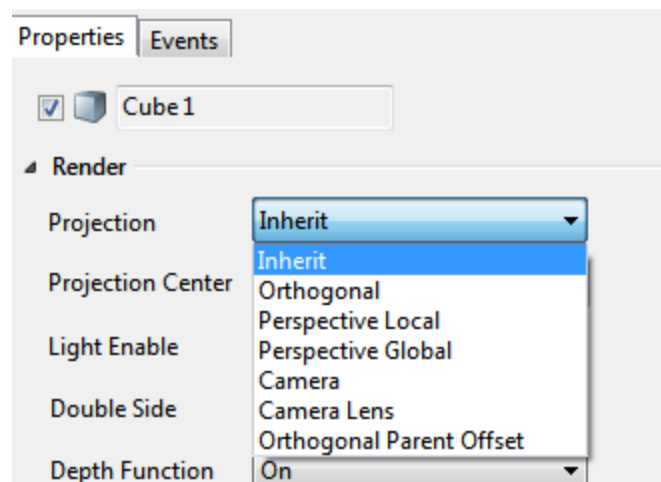

- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens is tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

Projection Center

- **On** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects. Default value.
- **Always** - Fragment is rendered always independently of depth buffer.
- **Never** - Fragment isn't rendered ever.
- **Equal** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.
- **Less than or Equal** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer. The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.
- **No Write** - Similar to option "ON" with difference of Stealth attribute. Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
- **Greater than or Equal** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer. The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!

Light Enabled

Double Sided

Depth Function

Priority

Transform

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Surface


Opacity:

Cube Properties

File:

Size:

Bevel

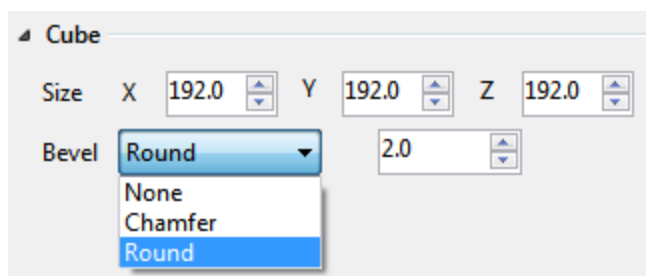

- None:
- Chamfer:
- Round:

Cylinder Object

Render Properties

Projection

- **Orthogonal** - Orthogonal projection.
- **Perspective local** - Central projection. The mid-point of projection is affected by an object.
- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens is tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.
 - **Projection Center**
- **On** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects. Default value.
- **Always** - Fragment is rendered always independently of depth buffer.
- **Never** - Fragment isn't rendered ever.
- **Equal** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.
- **Less than or Equal** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer. The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.
- **No Write** - Similar to option "ON" with difference of Stealth attribute. Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
-

- **Greater than or Equal** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!

Light Enabled**Double Sided****Depth Function****Priority****Transform Properties**

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Surface Properties**Opacity**

Set the opacity on the surface object

Cylinder Properties

Diameter

Depth

Angle

Hole

Tessellation

Alignment

- **Center**
- **Clockwise**
- **Counter Clockwise**

UV Mapping

- **Planner**
- **Polar**

Bevel Properties

Size

Curve

Scale

Tessellation

Back

Inside

Freehand

Transform Properties

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Data:

Point X-Y: 33

Data: CSV data in format: "x1,y1\nx2,y2" \n is a new line character.
You can use pipe "|" character instead of new line.

Freehand:

Color: Stroke color

End Fade: Position on the stroke where to apply alpha gradient from 1 to 0.

End Length: The length of end part of the stroke which is made thinner.

Thickness: Half thickness of the stroke

Filter Step: Filter step affects finer (lower than 1.0) or coarse (higher than 1.0) sampling of input data.

Texture:

Texture: Filename of image file used as a texture on stroke.

If set to empty string or undefined then no texture is used.

The texture is always drawn in REPEAT mode.

To shift the texture along the stroke use TextureMatrix effect and change Offset.X

Stretch: When undefined the texture is repeated over the stroke.
Otherwise the parameters define range in which the texture is stretched over the stroke.
The parts outside the range is not stretched.

Group Object


The default shortcut to add a group to your scene is Ctrl+G. Selecting objects in your scene tree using Ctrl and then pressing Ctrl+G will add a new group to your scene and automatically move the selected objects inside the new group. The default shortcut ungroup is Ctrl+U.

Render Properties

Projection

- - **Orthogonal** - Orthogonal projection.
 - **Perspective local** - Central projection. The mid-point of projection is affected by an object.
 - **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
 - **Camera** - Projection in line with an external camera.
 - **Camera Lens** - Special kind of projection in line with an external camera.

Only the lens is tracked, it means just projection.
The view matrix is the identity matrix,
it doesn't depend on a location or camera direction.

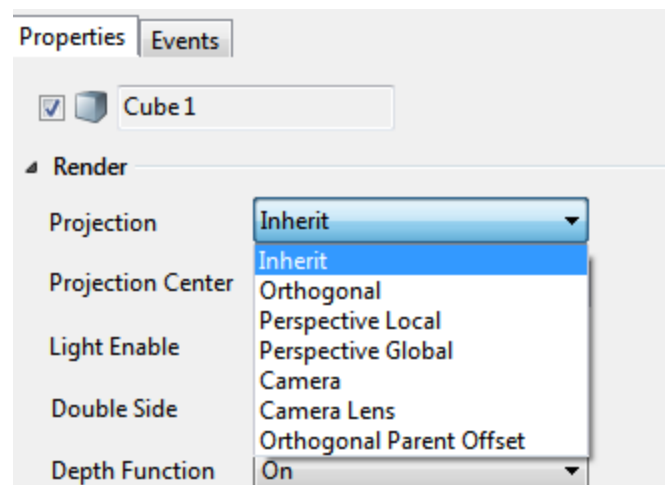

- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

Projection Center

- **On** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects.
Default value.
- **Always** - Fragment is rendered always independently of depth buffer.
- **Never** - Fragment isn't rendered ever.
- **Equal** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.
- **Less than or Equal** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.
- **No Write** - Similar to option "ON" with difference of Stealth attribute.
Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
- **Greater than or Equal** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!

Light Enabled

Double Sided

Depth Function

Priority

Transform Properties

The **Transform** subcategory allows for the manipulation of the Clip Objects **Position**, **Scale**, **Rotation** and **Pivot** along the XYZ axis

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z


Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Surface Properties

Opacity: Set the opacity of the children in the group

Image Object

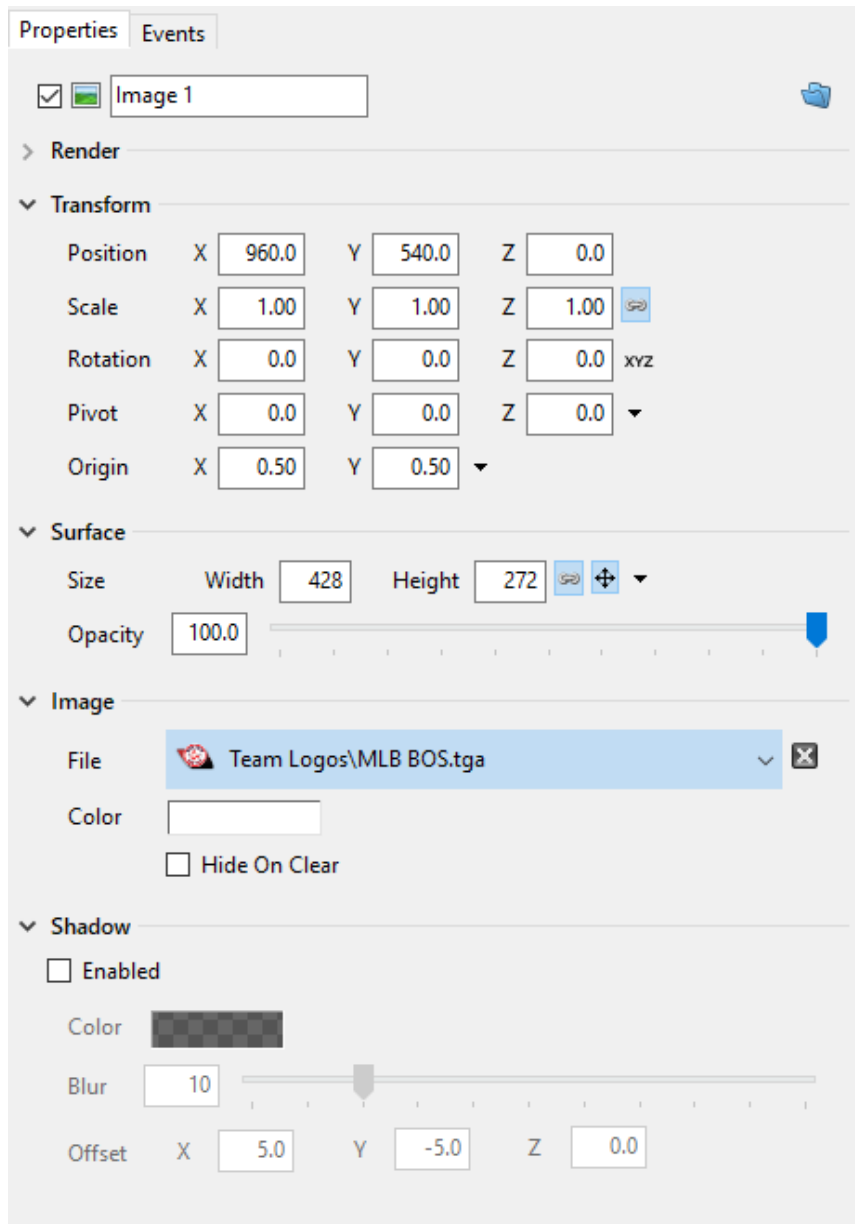

The following settings may be configured on the **Image Properties** window:

- **Name** – The name to be referenced throughout the scene

FOR MORE INFORMATION ABOUT CHYRON VISIT:


[HTTP://CHYRON.COM](http://chyron.com)

Render Properties


The **Render** subcategory includes:

- **Projection -**

- **Orthogonal** - Orthogonal projection.
- **Perspective local** - Central projection. The mid-point of projection is affected by a object.
- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens are tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

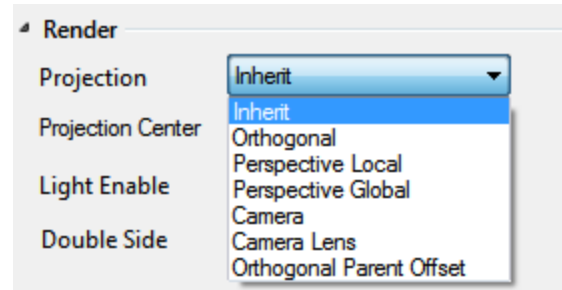


- **Projection Center** - Center of projection. (Position on the screen where all lines meet in infinity.)
- **Light Enabled** - Enable use of lights. Applies only to object with generated normals. This feature is ignored when using shaders.
- **Double Sided** - Double side visibility.
- **Depth Function**- Function for making decision whether it will write to scene according to z-buffer.
 - **OFF** - Disabled writing to depth buffers. Suitable for flat object which doesn't collide with any other objects.
 - **ON** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects. Default value.

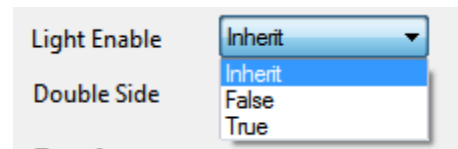

- **ALWAYS** - Fragment is rendered always independently of depth buffer.
 - **NEVER** - Fragment isn't rendered ever.
 - **EQUAL** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.
 - **EQUAL** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.
 - **NOWRITE** - Similar to option "ON" with difference of Stealth attribute.
Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
 - **GEQUAL** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!
-
- **Priority**- Rendering priority within a layer. The higher number the later the object gets rendered.
Use with care! Rather use Position.Z instead.
The priority change doesn't work well if objects use depth buffer.
 - **Texture Quality**
 - **Texture Wrap**

Transform Properties

The **Transform** subcategory allows for the manipulation of the Image Objects **Position**, **Scale**, **Rotation** and **Pivot** along the XYZ axis.

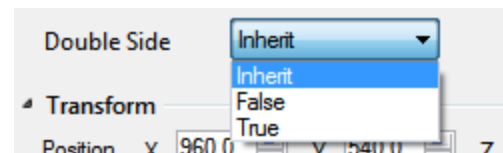

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z


Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z


- To keep the Scale Aspect fixed to its current dimensions, click the lock icon to Lock Aspect Scale.

Surface Properties

The **Surface** subcategory includes:

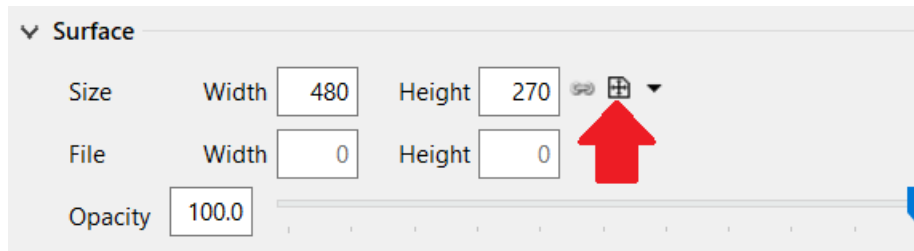


The red arrow button will allow you to set the Size Mode to determine what happens when the image is replaced. This option gives you many choices.

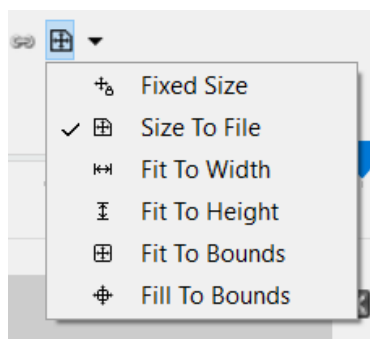

- **Fixed Size:** Image will use the Width and Height defined in the properties regardless of the file size
- **Size To File:** When the File property changes, Width and Height will be set to the File dimensions
- **Fit To Width:** The Width will be set to the specified Fit Bounds Width, and the Height will be calculated to maintain the aspect of the File Size
- **Fit To Height:** The Height will be set to the specified Fit Bounds Height, and the Width will be calculated to maintain the aspect of the File Size
- **Fit To Bounds:** The Size is set to fit within the Fit Bounds, while maintaining file aspect
- **Fill To Bounds:** The Size is set to fill within the Fit Bounds, while maintaining file aspect


Image Properties

The **Image** subcategory includes

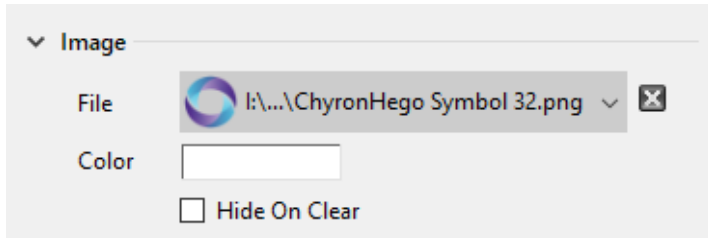


File


- Image Browser -

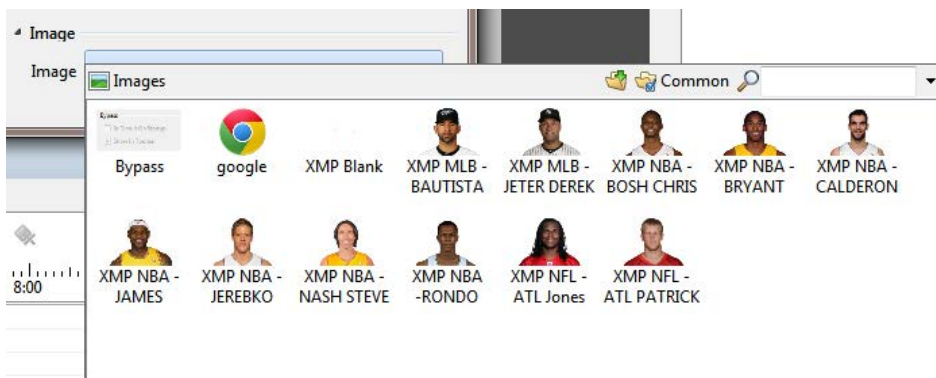


Selecting images from folders outside the project will prompt you to import or not import the selected image to the project.

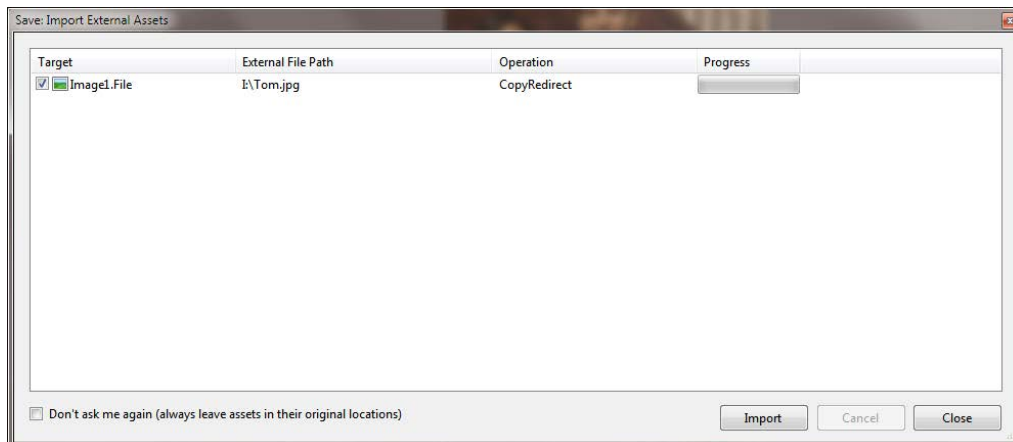


Color

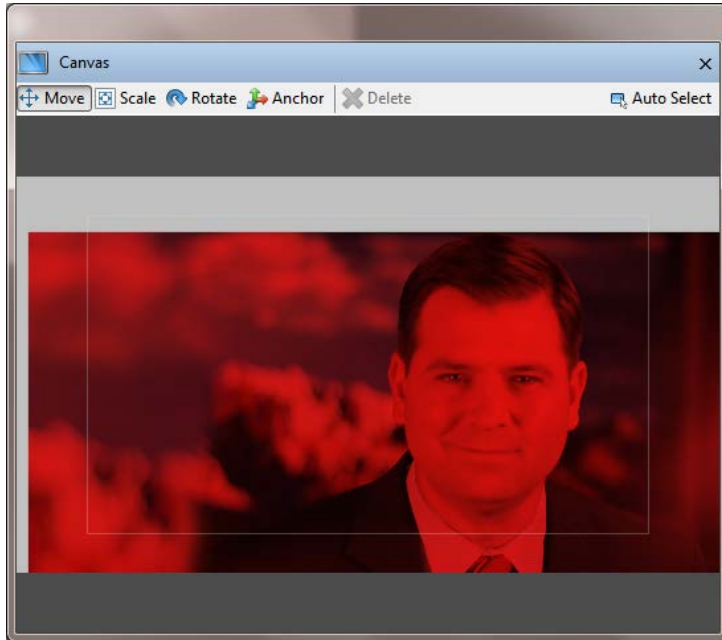



Or use as a solid color, ramp or quad:

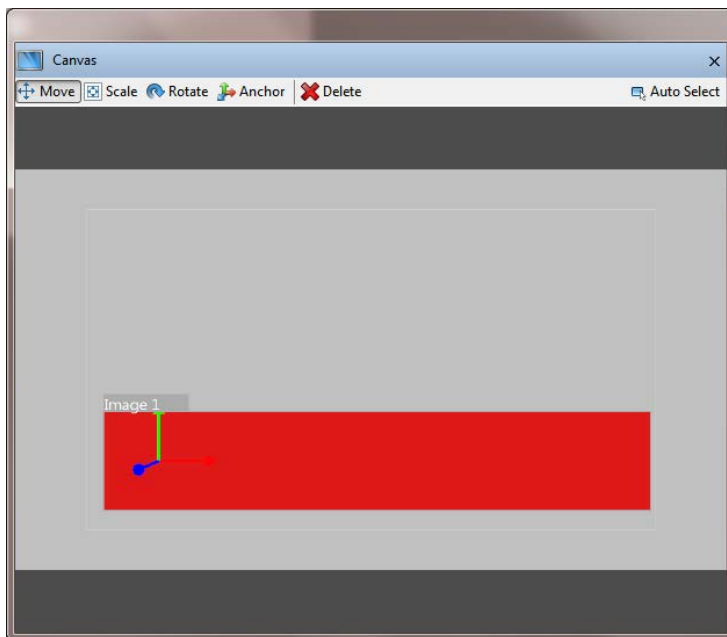


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

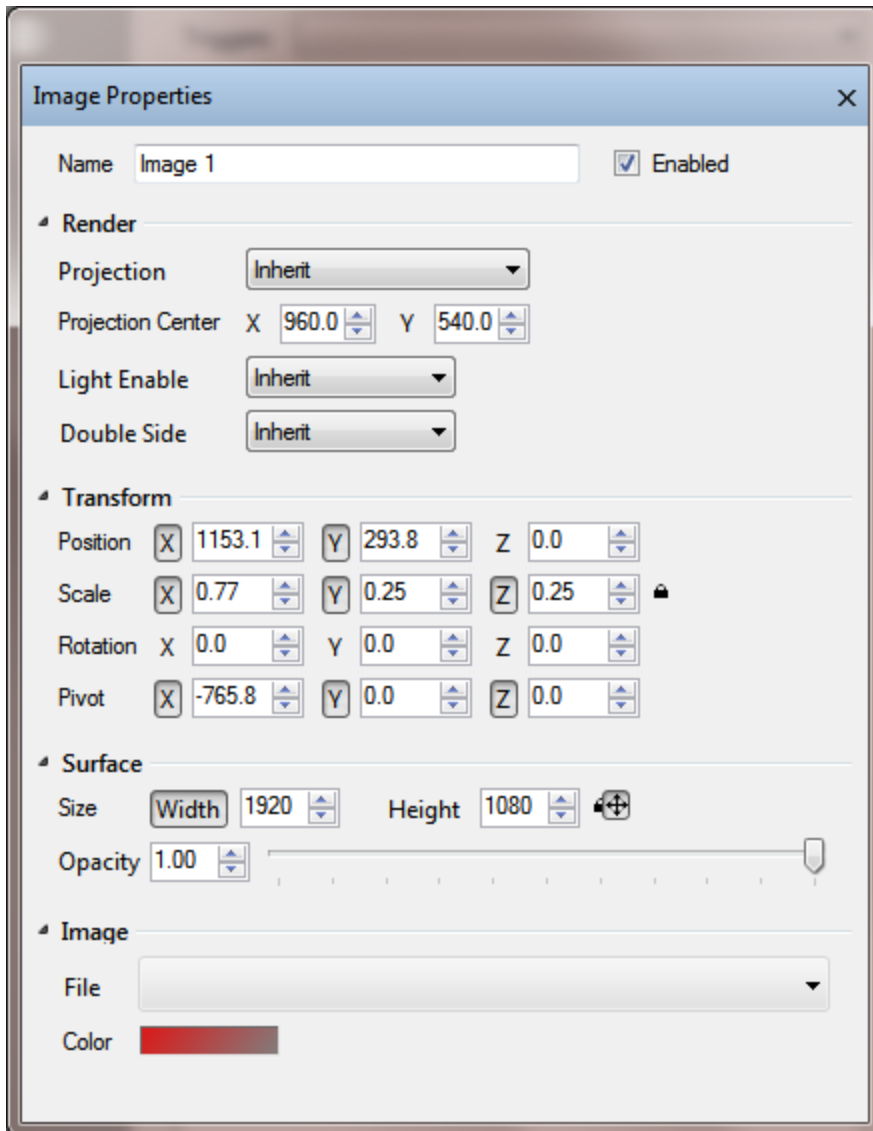

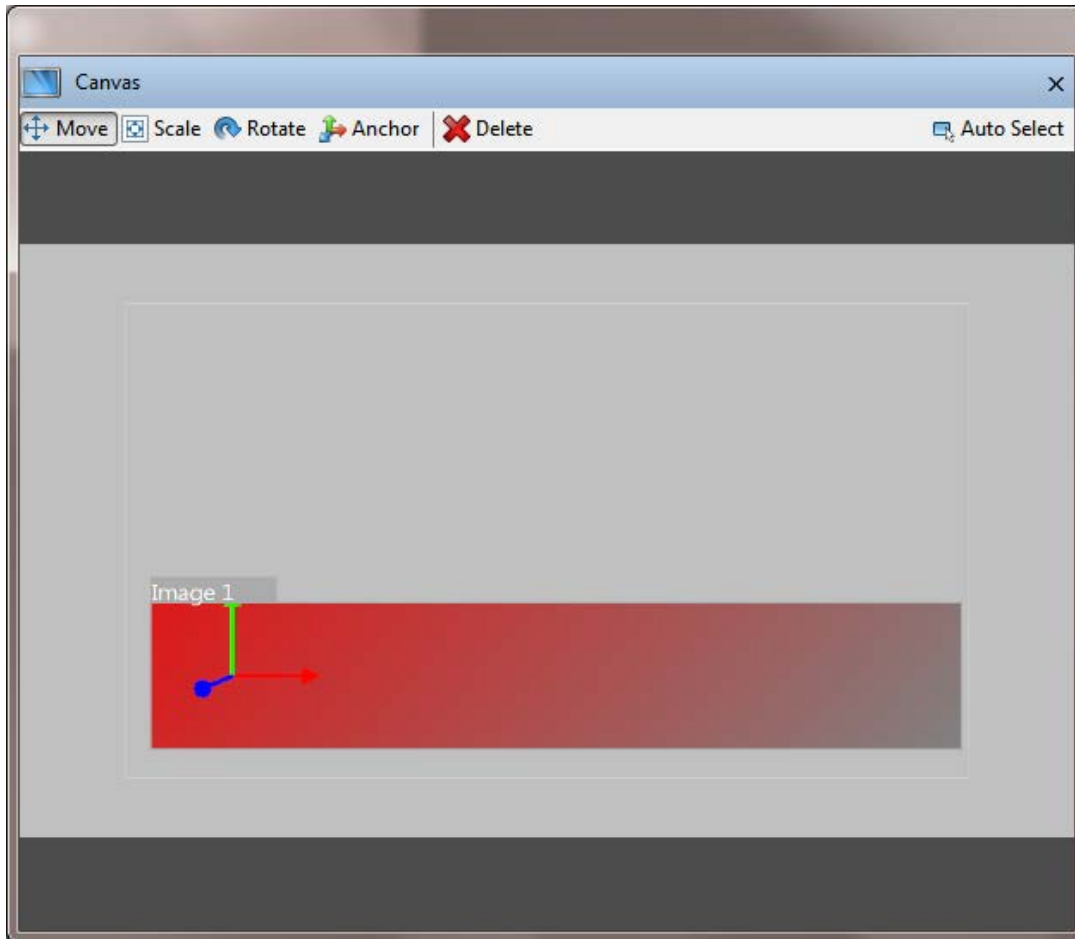

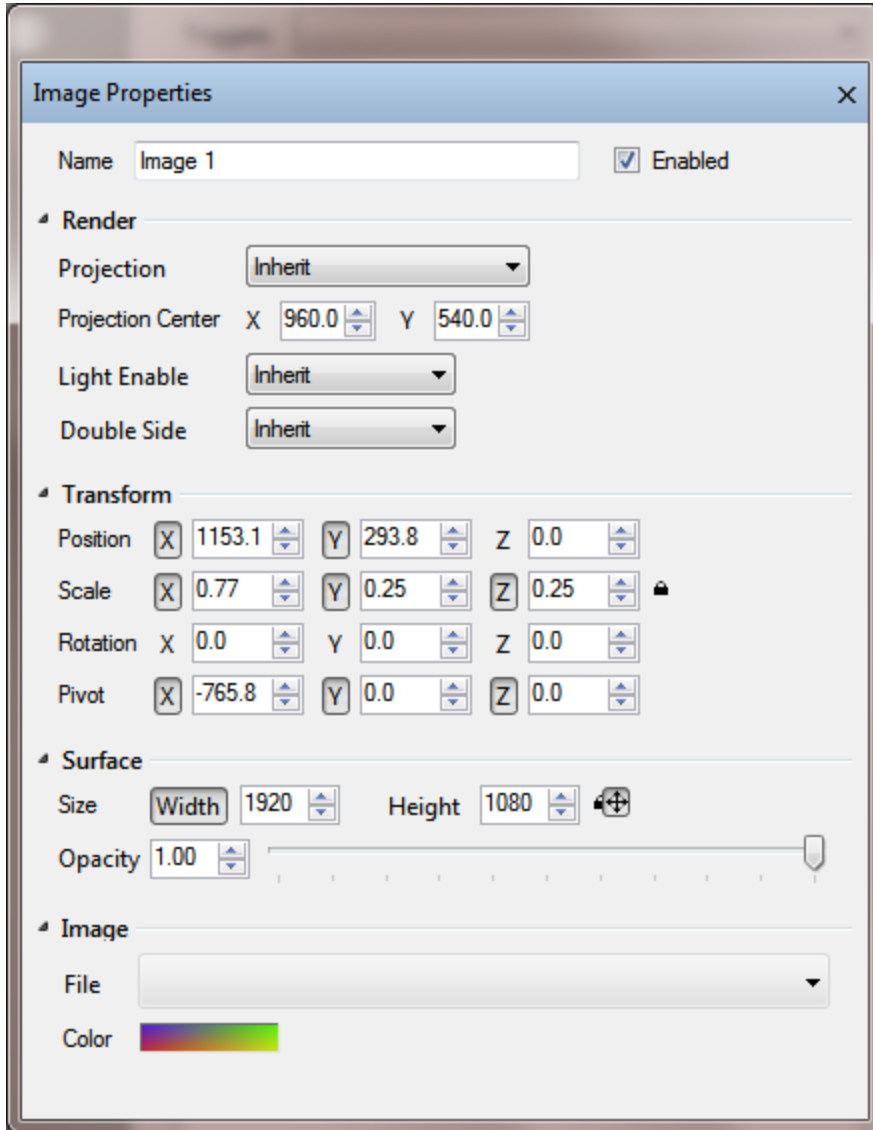

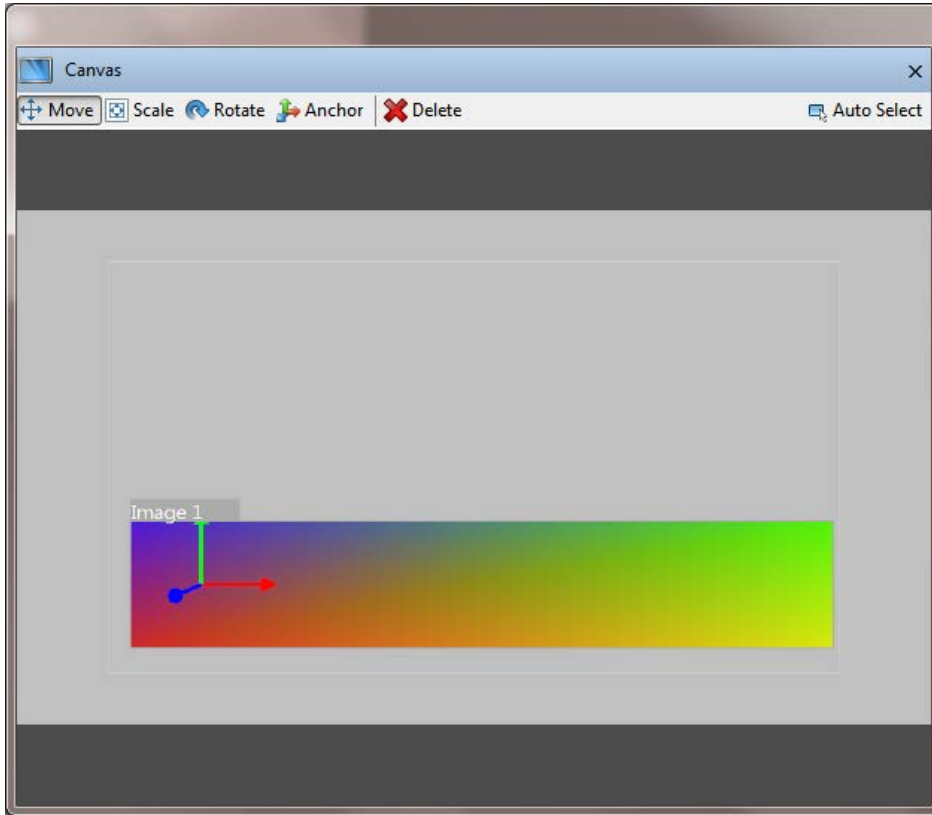


Shadow Properties

Hide on Clear

When the image is cleared make the image object Transparent.


Shadow

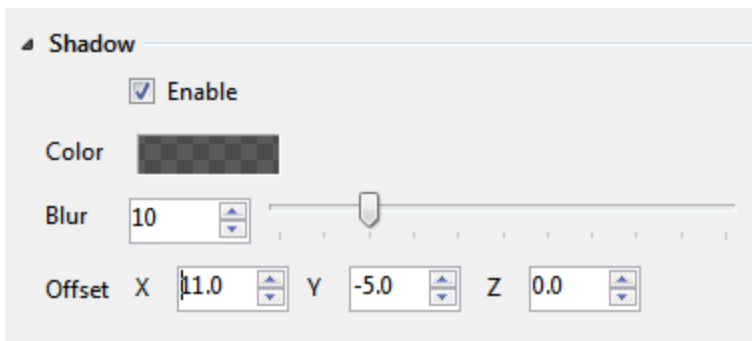

- **Hide on Clear**


When enabled this option will clear the image placeholder. When not enabled it will use the default color to fill the image placeholder.

Image Events

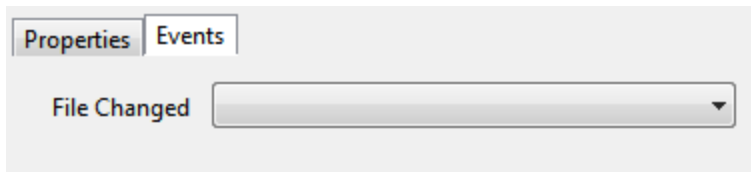

Properties Events

File Changed

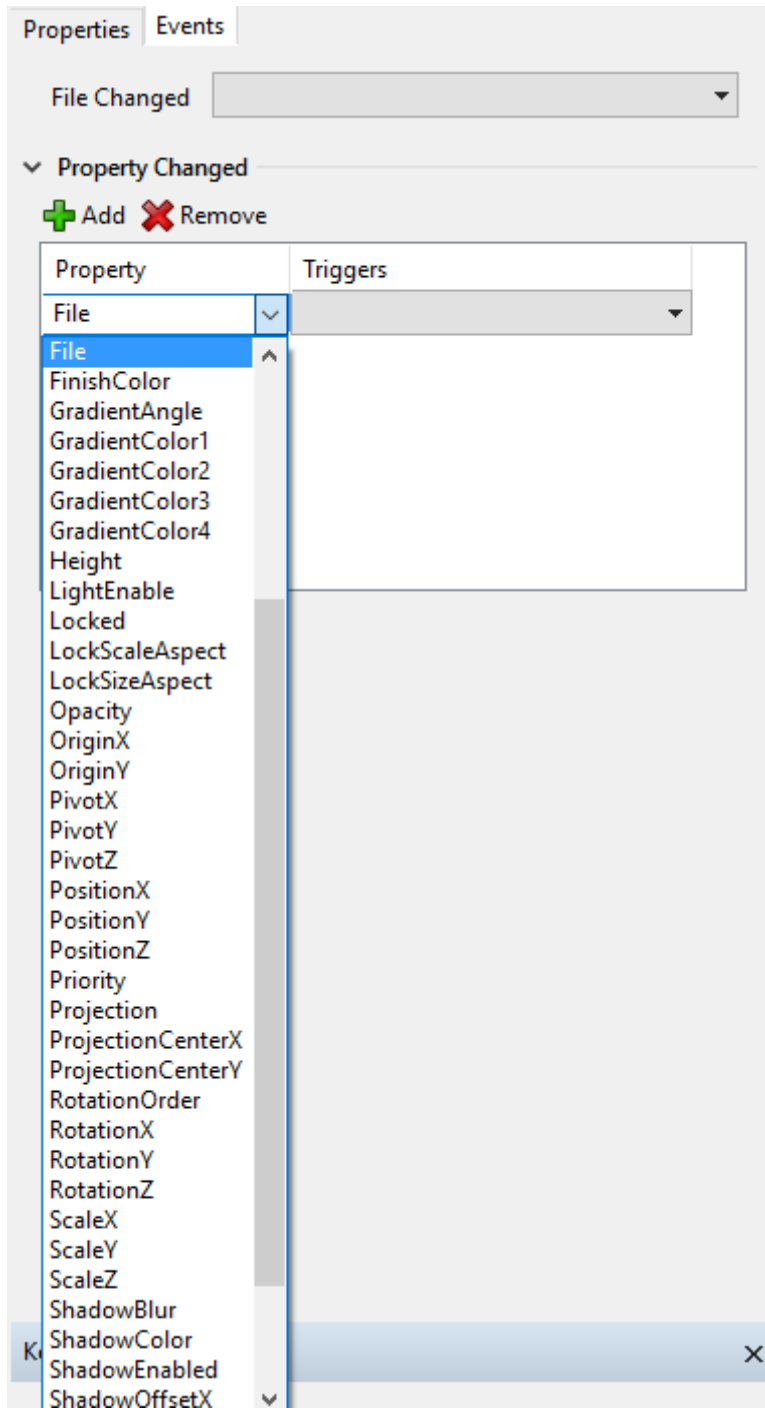

Model

The supported file types are **.iv, .rtg, .3ds, .obj and FBX.**

Polygon Object

Render Properties

Projection

- **Orthogonal** - Orthogonal projection.
- **Perspective local** - Central projection. The mid-point of projection is affected by an object.
- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens is tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

Projection Center

- **On** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects. Default value.
- **Always** - Fragment is rendered always independently of depth buffer.
- **Never** - Fragment isn't rendered ever.
- **Equal** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.
- **Less than or Equal** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer. The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.

- **No Write** - Similar to option "ON" with difference of Stealth attribute. Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
- **Greater than or Equal** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer. The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!

Light Enabled

Double Sided

Depth Function

Priority

Transform Properties

Position: Position the object in X, Y or Z


Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Polygon Properties

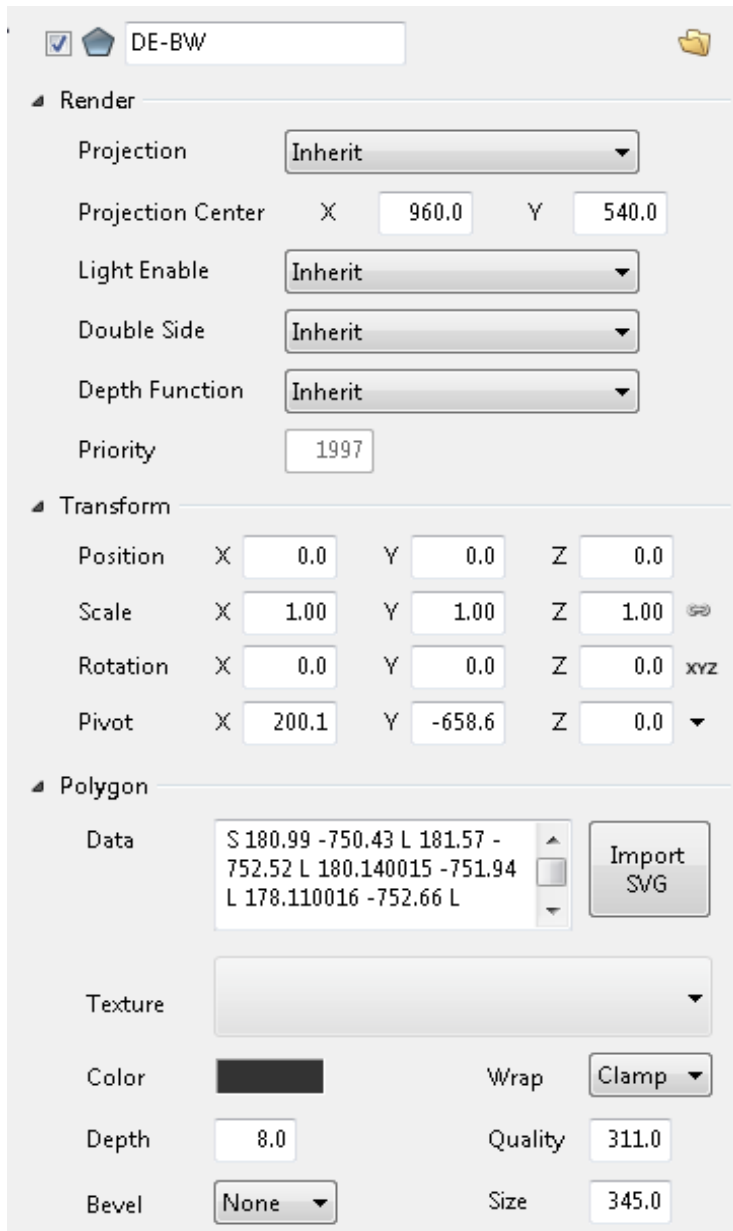


Data

- The data section is a string representation of the data needed to display a polygon in the designer or scene.

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

- Data for a polygon can be directly imported from an existing SVG file by using the Import SVG button
 - Once the button is pressed and open file dialog will be presented where the use can select and SVG file.
 - Once a file is selected the Import SVG dialog is shown.

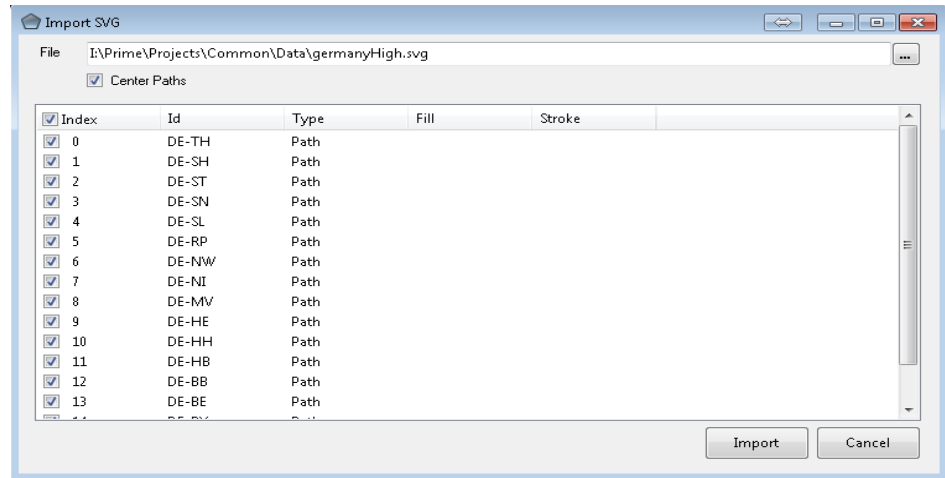

- The user can then select the polygons in the file they would like to import but selecting the check box next to the object.
- The Center Paths option will center the polygons in the scene.
- The end result will be one polygon object in the scene create from all the data in the SVG file.

Texture

Selects the texture for the polygon

Color

The color of the polygon

Wrap

Defines how the texture is wrapped on the polygon

- Clamp – Clamps the texture to the polygon geometry
- Repeat – Repeats the texture multiple times to fill polygon

Depth

Depth of the polygon along the Z-axis

Quality

Represents the level of detail on the edge of the polygon

Bevel

The type of bevel to apply.

- None
- Chamfer

Size

The size of the bevel

Pod Object

Render Properties

Projection

- **Orthogonal** - Orthogonal projection.
- **Perspective local** - Central projection. The mid-point of projection is affected by an object.
- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens is tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

Projection Center

On - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects.

Default value.

Always - Fragment is rendered always independently of depth buffer.

Never - Fragment isn't rendered ever.

Equal - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.

Less than or Equal - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer.

The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.

No Write - Similar to option "ON" with difference of Stealth attribute.

Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.

Greater than or Equal - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer.

The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!

Light Enabled**Double Sided****Depth Function****Priority****Transform Properties**

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Surface Properties**Size**

X,Y and Z size

Opacity

Set the opacity on the surface object

Pod Properties

Top Left

Top Right

Bottom Left

Bottom Right

Corner Shape

Skew

Outline

Tessellation

Bevel Properties

Size

Cuve

Scale

Tessellation

Back

Inside


Rectangle Object

Render Properties

Projection

- **Orthogonal** - Orthogonal projection.

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

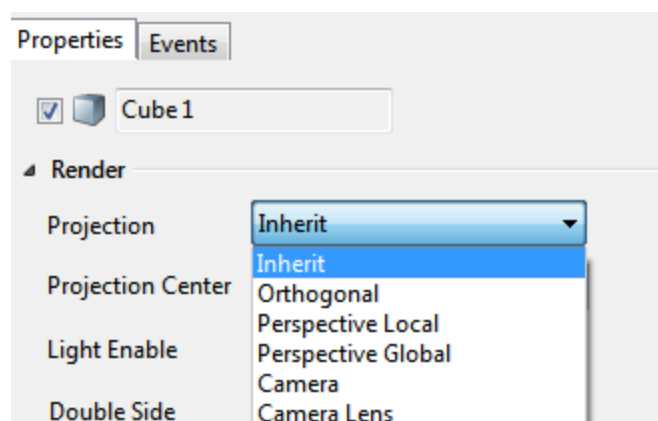

- **Perspective local** - Central projection. The mid-point of projection is affected by an object.
- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens is tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

Projection Center

- **On** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of 3D object surface and its mutual location with other objects. Default value.
- **Always** - Fragment is rendered always independently of depth buffer.
- **Never** - Fragment isn't rendered ever.
- **Equal** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.
- **Less than or Equal** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer. The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.
- **No Write** - Similar to option "ON" with difference of Stealth attribute. Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
- **Greater than or Equal** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer. The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!

Light Enabled

Double Sided

Depth Function

Priority

Transform Properties

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Surface Properties

Size

Opacity:

Rectangle Properties

File:

Skew

Tessellation

Corner Shape

Top Left

Top Right

Bottom Left

Bottom Right

Skew- Skew angle in degrees from -90° (left) to 90° (right).

Tessellation- Number vertices on the circle perimeter.

Higher tessellation makes the circle smoother but consumes more resources to render.

FOR MORE INFORMATION ABOUT CHYRON VISIT:

[HTTP://CHYRON.COM](http://chyron.com)


Corner Shape- Value -1 is flat, 0 is round, 1 is just a corner.

Sphere Object

Render Properties

Projection

- **Orthogonal** - Orthogonal projection.
- **Perspective local** - Central projection. The mid-point of projection is affected by an object.
- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens is tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

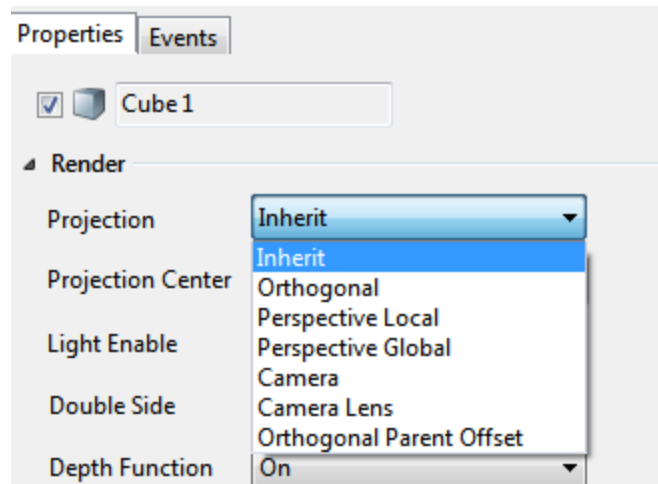

Projection Center

- **On** - Fragment is rendered if object lies close to a observer (it's Z-coordinate is smaller than Z-coordinate in depth buffer). This option ensures the correct visibility of the 3D object surface and its mutual location with other objects. Default value.
- **Always** - Fragment is rendered always independently of depth buffer.

- **Never** - Fragment isn't rendered ever.
- **Equal** - Fragment is rendered if Z-coordinate at a given point is equal to Z-coordinate from depth buffer. Appropriate for n-pass drawing of the same object.
- **Less than or Equal** - Fragment is rendered if Z-coordinate is less or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects.
- **No Write** - Similar to option "ON" with difference of Stealth attribute.
Object is rendered under the rule visibility, but it isn't placed in depth buffer in itself.
- **Greater than or Equal** - Fragment is rendered if Z-coordinate is greater or equal to Z-coordinate from depth buffer.
The later rendered objects in case of equality in Z-coordinate overlay previous rendered objects. Use just for special purposes!

Light Enabled

Double Sided

Depth Function

Priority

Transform Properties

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Surface Properties

Opacity

Set the opacity on the surface object

Sphere Properties

File

Applies a file to the sphere

Angle

Visible angle in degrees from 0° to 360° around Y axis.

Value below 360° increases open angle in the sphere.

Diameter

Sphere diameter.

Tessellation


Sphere degree of detail.

Higher tessellation makes the sphere smoother but consumes more performance to render.

UV Mapping:

- **Absolute** - Texture stretches over visible angle.
- **Relative Left** - Texture is anchored at the left end and cut at the right side end.
- **Relative Right** - Texture is anchored at the right side end and cut at the left side end.
- **Centered** - Texture is centered to the middle of visible angle and cut at both ends.

Text Object

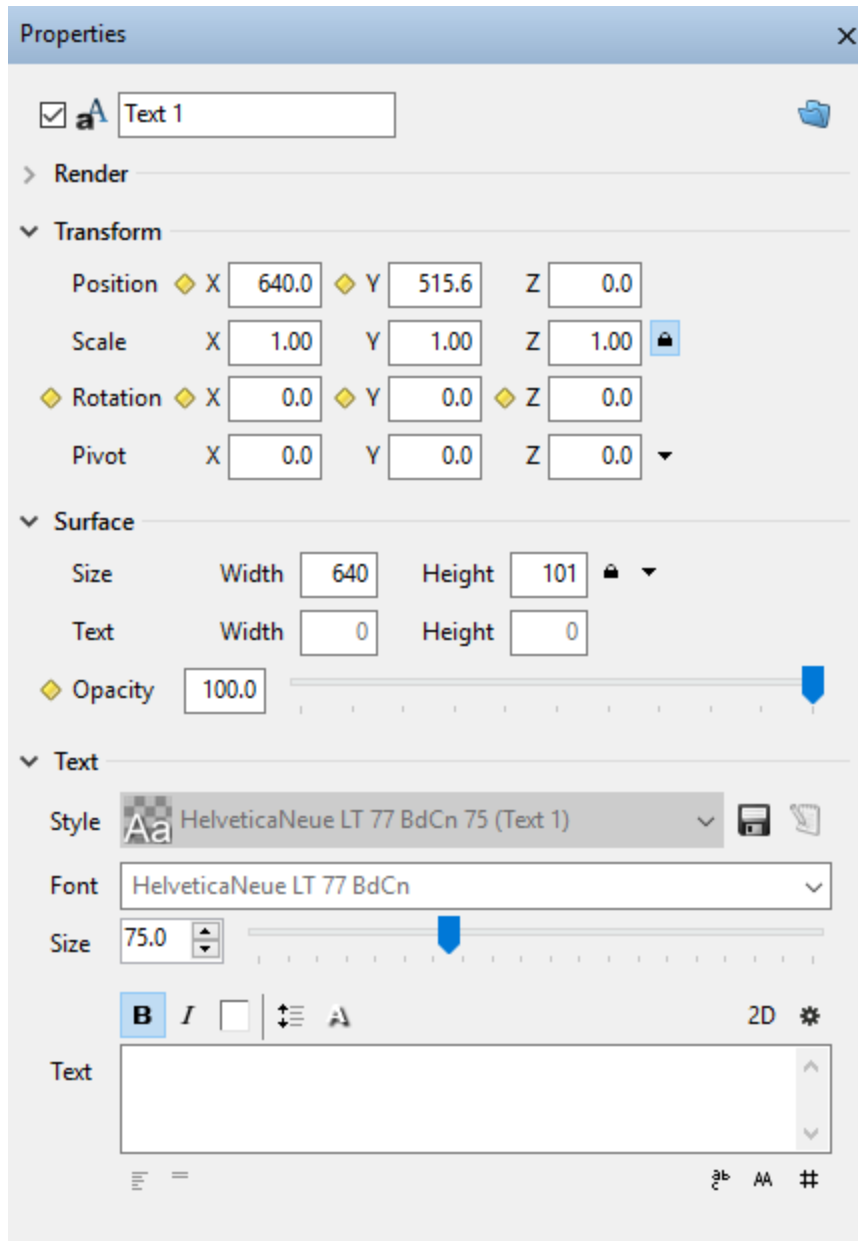

The following settings may be configured on the **Text Properties** window:


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

- **Name** – The name of the object that will show everywhere throughout the application.

Render Properties

Projection - It is method how to map 3D objects to 2D screen plane

- **Orthogonal** - Orthogonal projection.
- **Perspective local** - Central projection. The mid-point of projection is affected by a object.
- **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
- **Camera** - Projection in line with an external camera.
- **Camera Lens** - Special kind of projection in line with an external camera. Only the lens are tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
- **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.

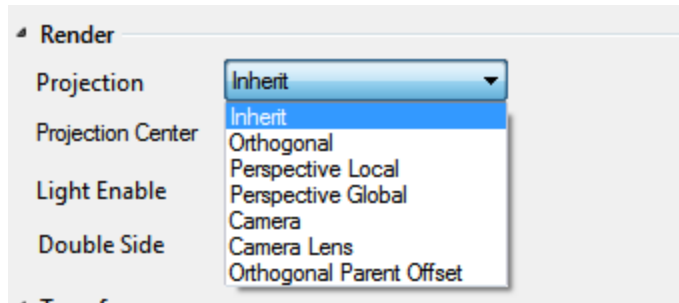

- **Projection Center** - Center of projection. (Position on the screen where all lines meet in infinity.)
- **Light Enabled** - Enable use of lights. Applies only to object with generated normals. This feature is ignored when using shaders.
- **Double Sided** - Double side visibility.

Transform Properties

The **Transform** subcategory allows for the manipulation of the Text Objects **Position**, **Scale**, **Rotation** and **Pivot** along the XYZ axis.

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z


Origin: Move the Origin Position of the object in X, Y or Z

- To keep the Scale Aspect fixed to its current dimensions, click the lock icon to Lock Aspect Scale.

Surface properties

The Surface subcategory includes settings for:

- Size – Sets the height and width of the bounding box. The dropdown gives the following choices:

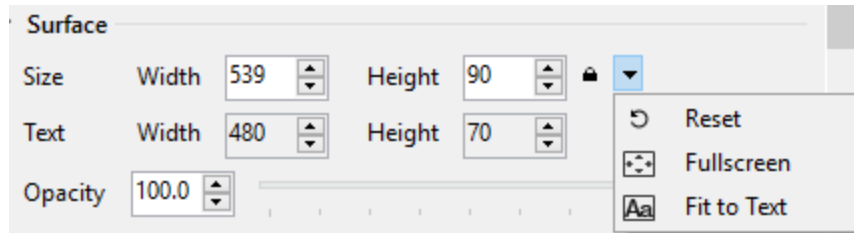


-Reset: Resets the bounding box

-Full screen: Makes the bounding box full screen

-Fit To Text: Wraps the bounding box around the bounds of the text

Example:

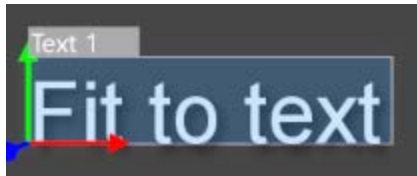

- Text- Read only property that shows the actual text bounds
- Opacity – Sets the opacity level from 0 to 100%

Text Properties

The **Text** subcategory allows for the selection of the **Font**, **Font Size**, **Opacity** and a variety of other font attributes.

The following “In-Line” text attribute tags are available:

Text content.

Text can contain special sequences starting with character \ .

Sequence \ = Decrease kerning space between surrounding characters.
Number of characters modifies the amount of extra kerning.

Sequence \> = Increase kerning space between surrounding characters.
Number of > characters modifies the amount of extra kerning.

Sequence \\ = Backspace itself.

Sequence \s = Non breaking space (see LineFlowPolicy).

Sequence \n = New line.

Sequence \u XXXX = unicode character with hex value XXXX .

Sequence \iu = Following text will be rendered as upper index.

Sequence \il = Following text will be rendered as lower index.

Sequence \in = Following text will be rendered as normal text (no index).


Sequence \u0082 = Special character "BREAK ALLOWED HERE". Soft break is allowed at this positions.

Sequence \c0 = Reset color to default.

Sequence \c N = Set color index. Values 1,2,3,4 can be used.
Colors specified in BaseColorP1..P4.


Sequence \t style_name ; = Set style by given style node name.
For base style, leave style_name empty.


- **Color Picker -**

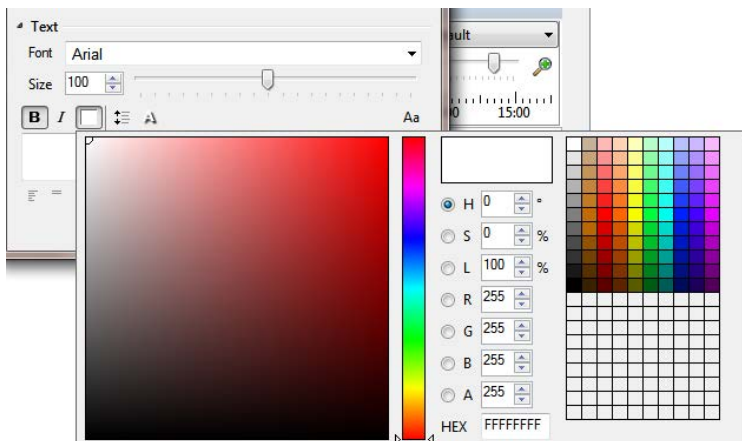


- **Kerning** - Adjusts the spacing between characters
- **Leading** - Adjusts the spacing between lines of text
- **Space Width** – Sets the width of the default space character
- **Fixed Pitch** – Each character will occupy the same amount of horizontal space.
This is good for clocks so the text will not “breathe”

- **Caps Ratio** - Sets text to all uppers and adjusts the ratio between capital letters

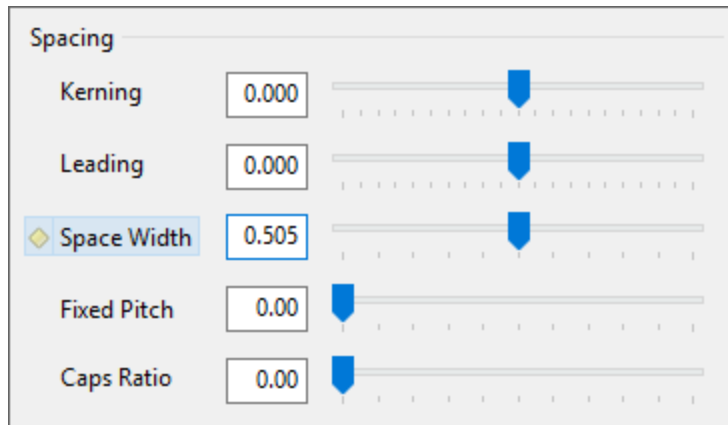





Note that Kerning, Leading, Fixed Pitch and Caps Ratio are all keyframeable.

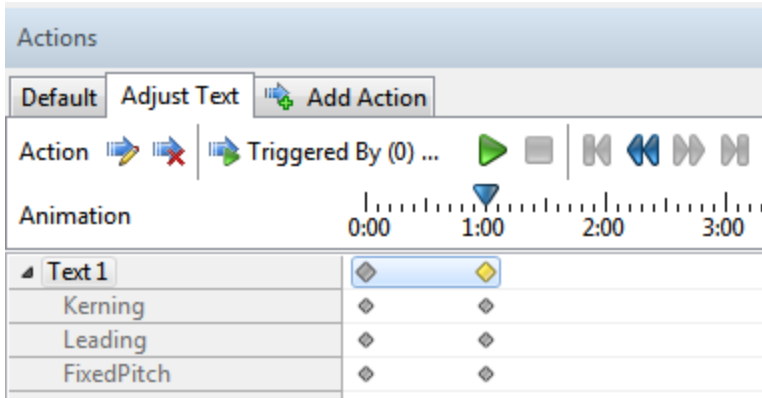


- **Shadow and Outline (Border) -**

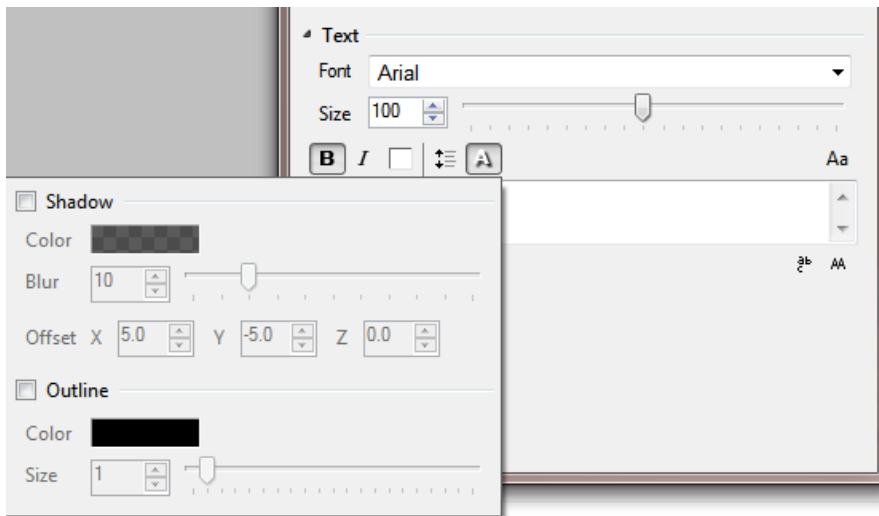


- **Text Style Browser -**




Text styles may be “referenced.” This means that changing the style of a text affects all other text objects in the scene or project.

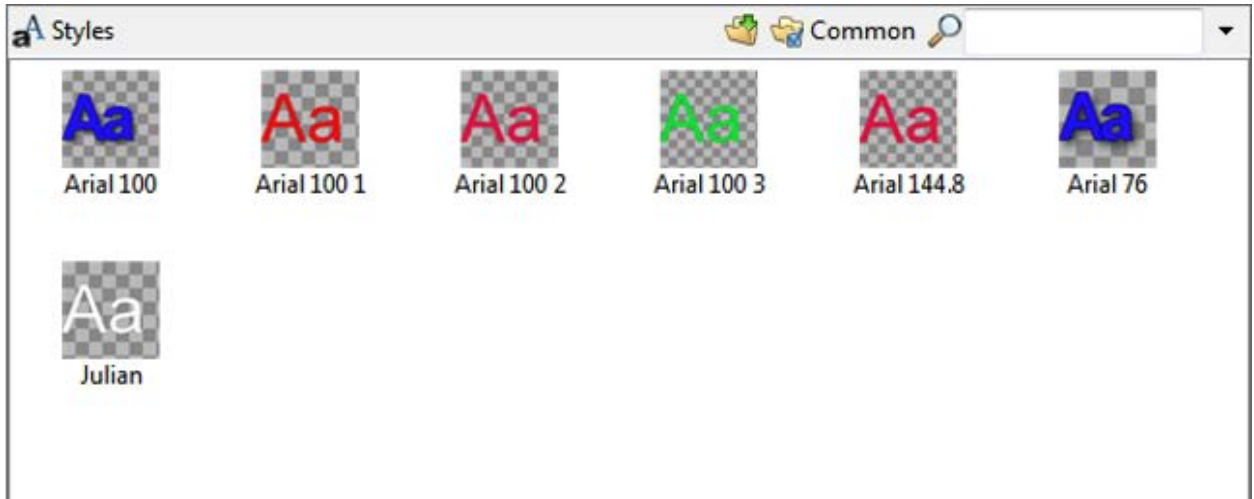

If the Style is referenced, you will see an image of the style in the Style drop down box.




- **Alignments -**

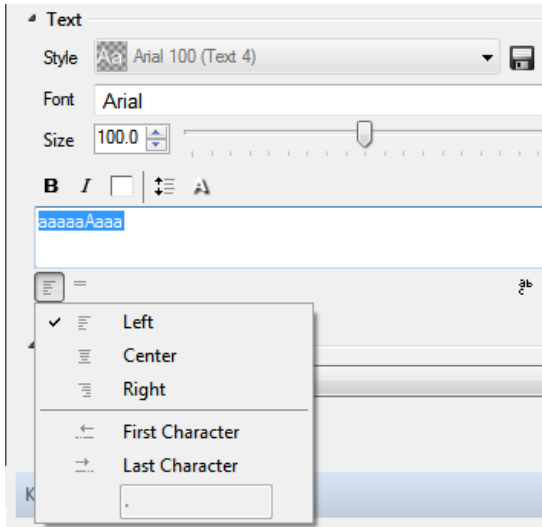


First Character aligns column data by the first character it finds by the defined character in the text.

Last Character aligns column data by the last character it finds by the defined character in the text.


In this example we set the First character to the comma character:

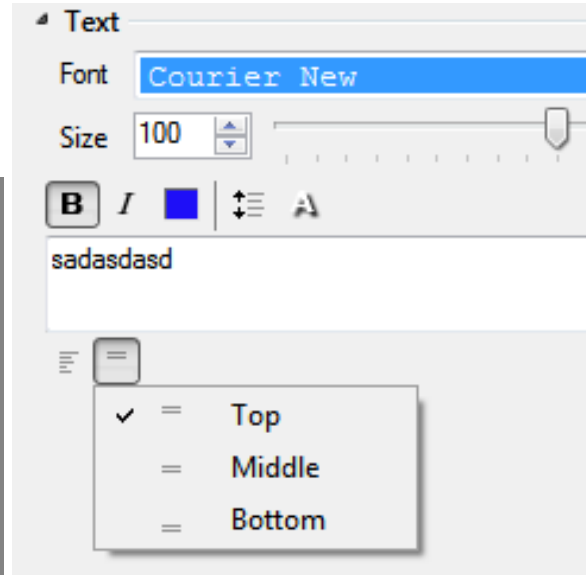


- **Line Flow**

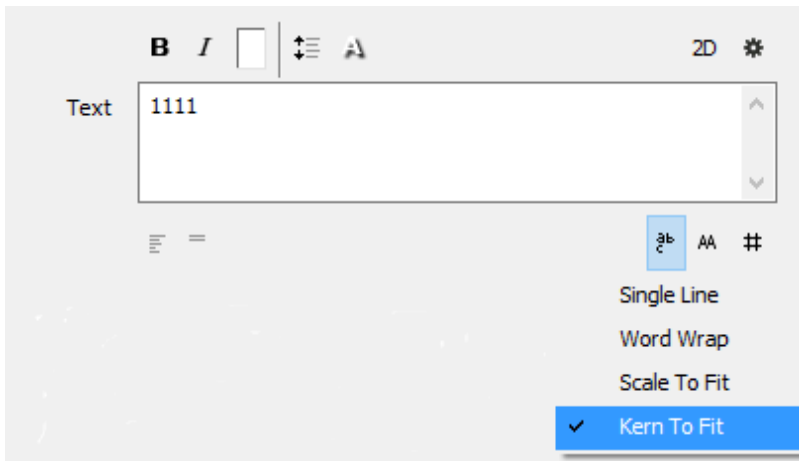

- **All Caps**

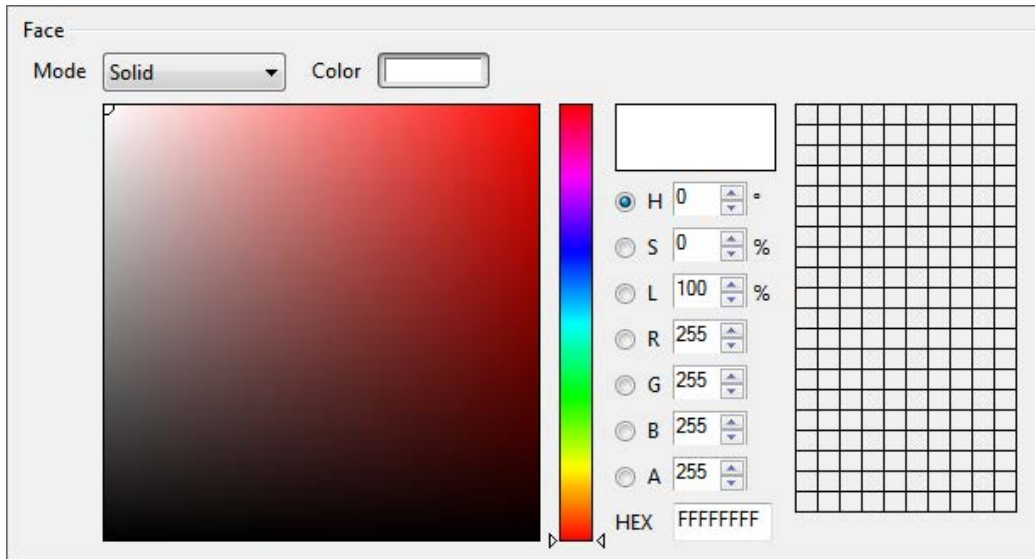


- Number Format -

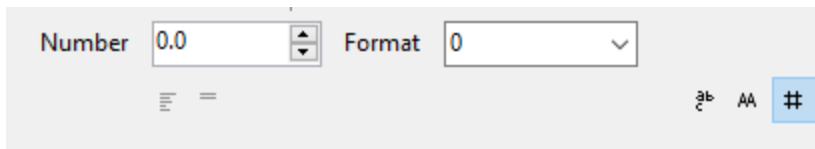


When added to keyframes the numbers will animate from their current value to the next value


- Gradients

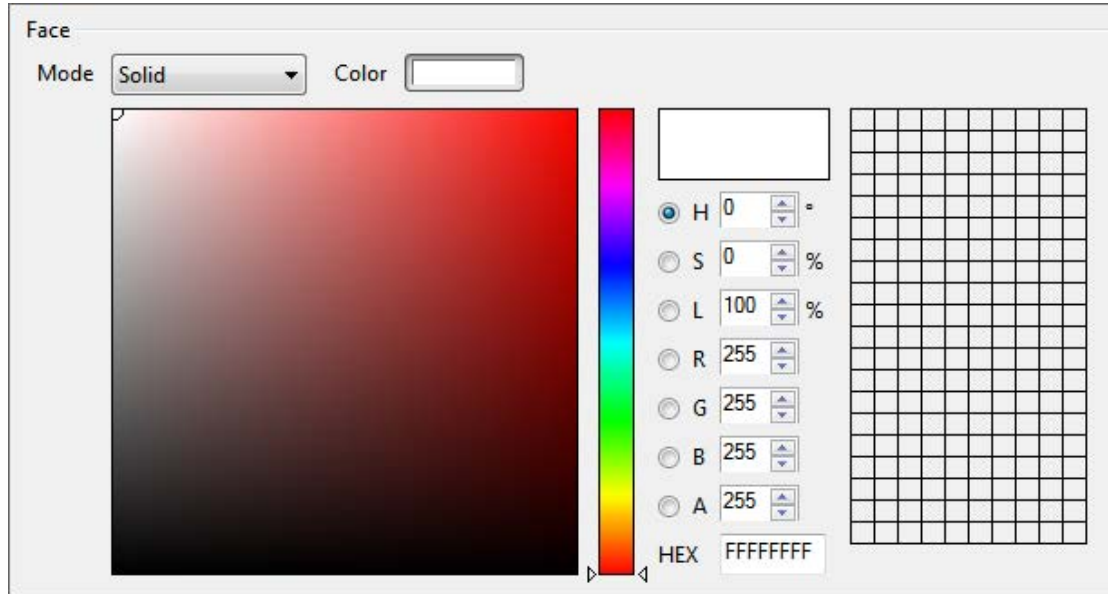


- **Linear**

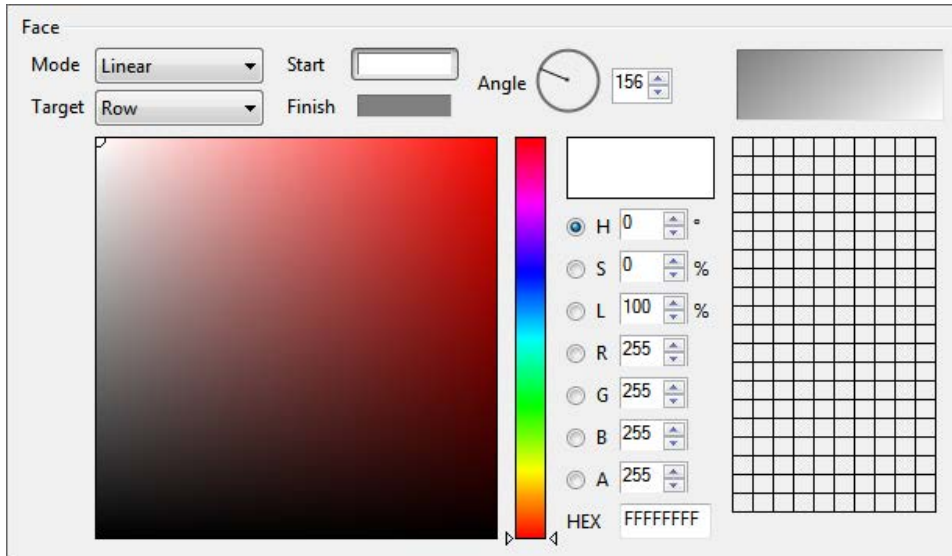

- **Quad**


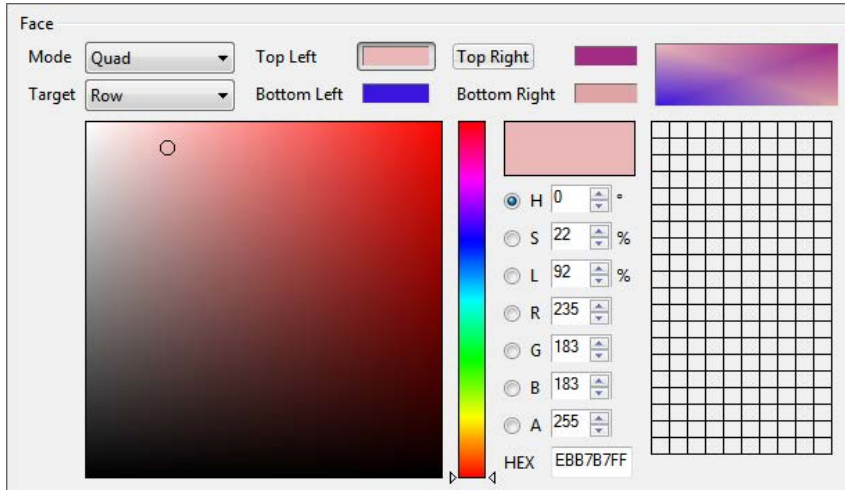


- **Target -**

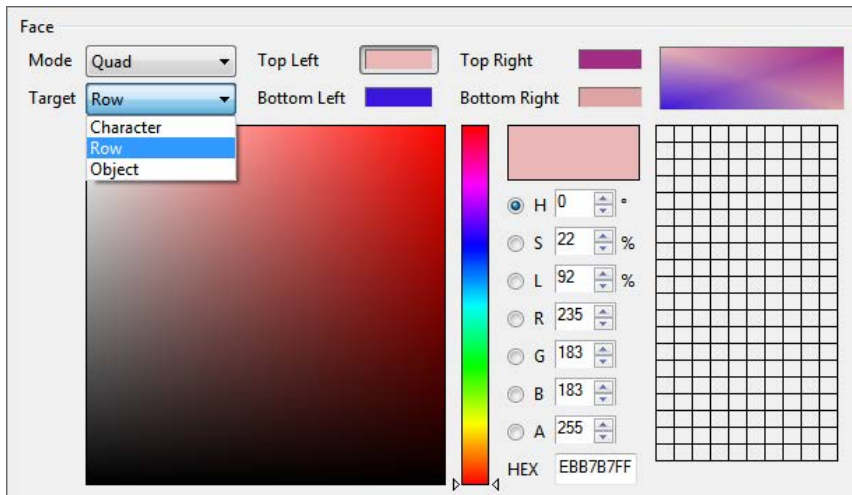


3D Text

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

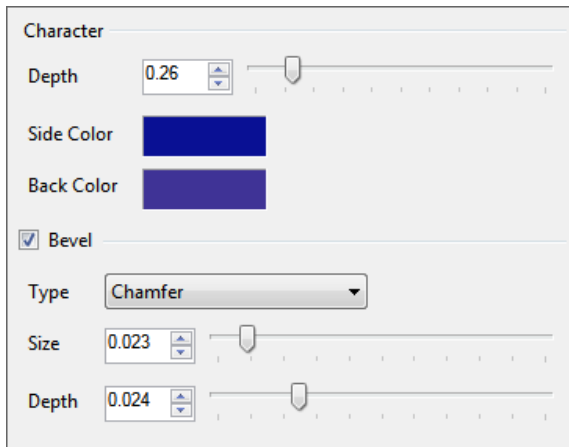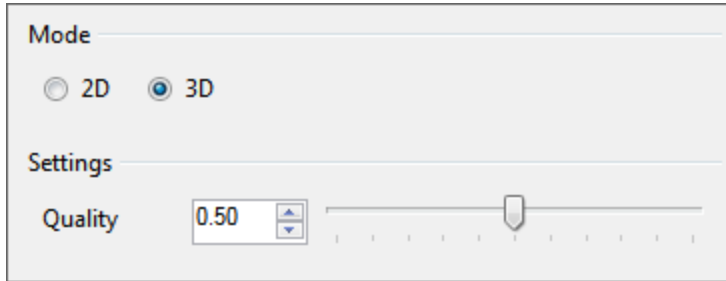


Text Events



You can trigger other objects methods whenever the text changes.

All of the Text objects properties have events when these properties change:

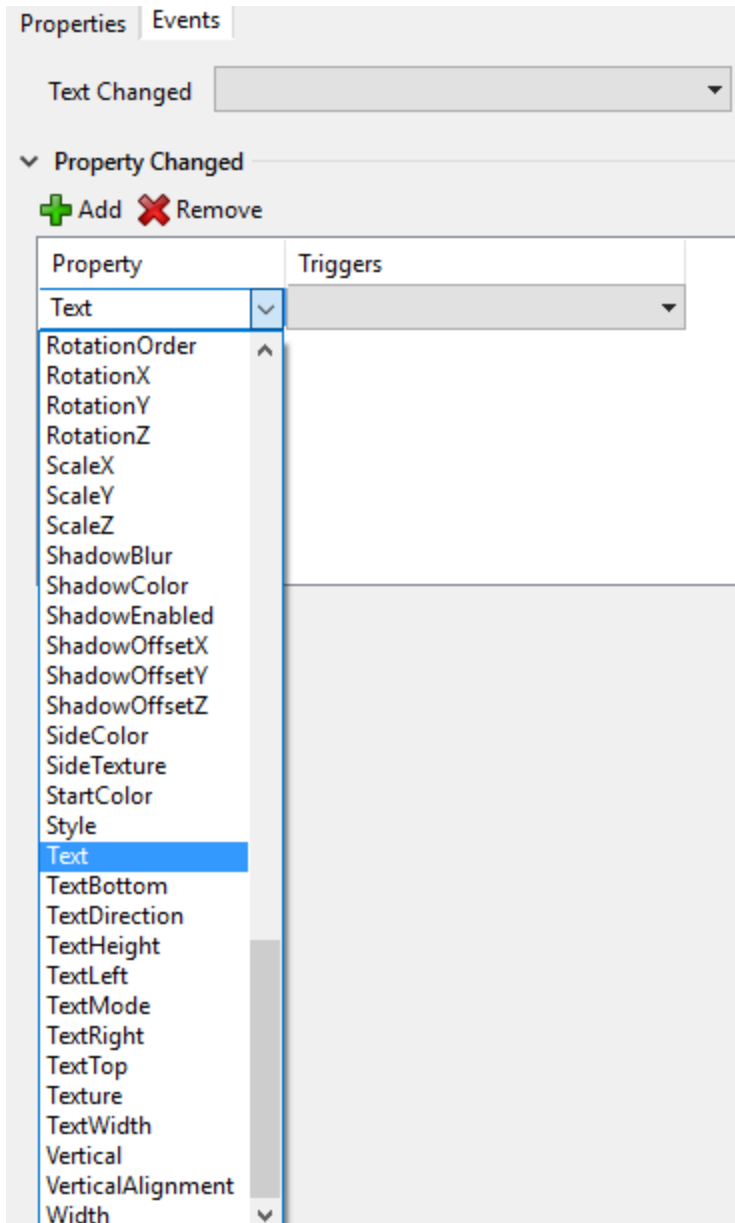

Text Tags

You can use text tags to change the color attributes of the text within a single text object.

The tags are \c0, \c1, \c2, \c3, \c4


\c0 will reset the text color back to the text objects default color

\c1 will use the top right color from the quad color palette


\c2 will use the top left color from the quad color palette

\c3 will use the bottom right color from the quad color palette

\c4 will use the bottom left color from the quad color palette

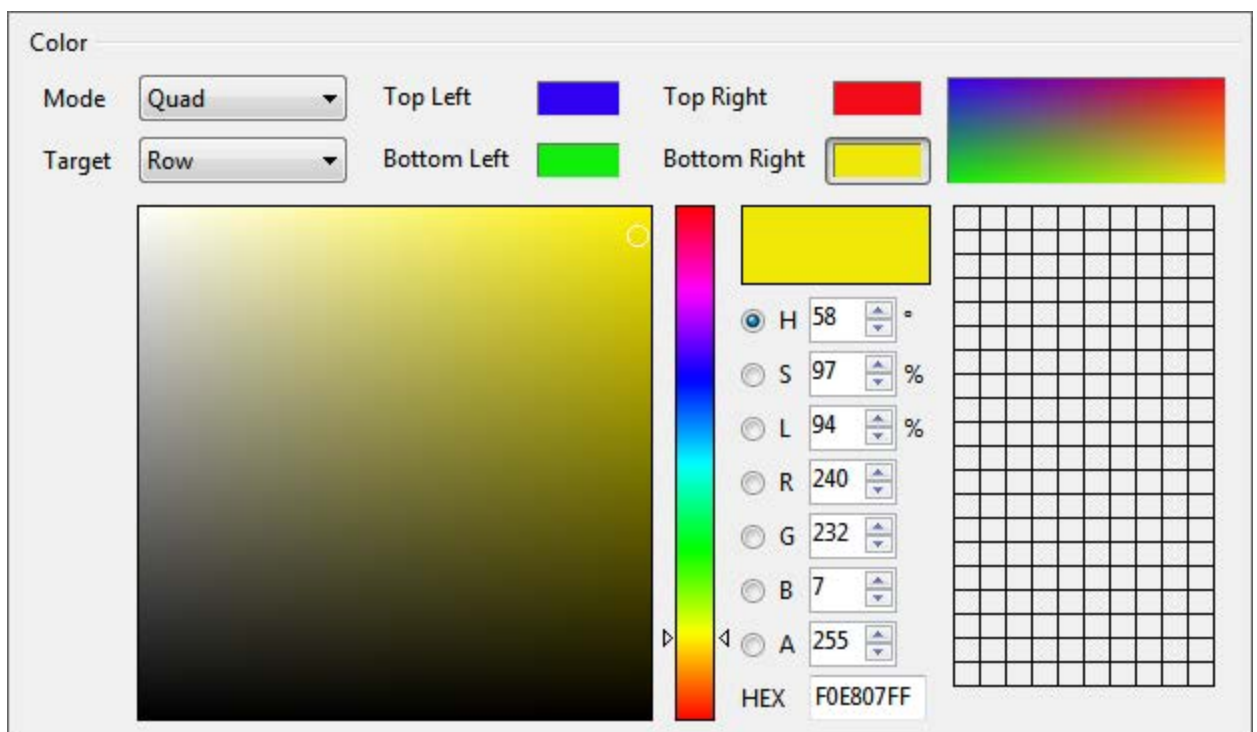

Set the color mode back to “Solid”

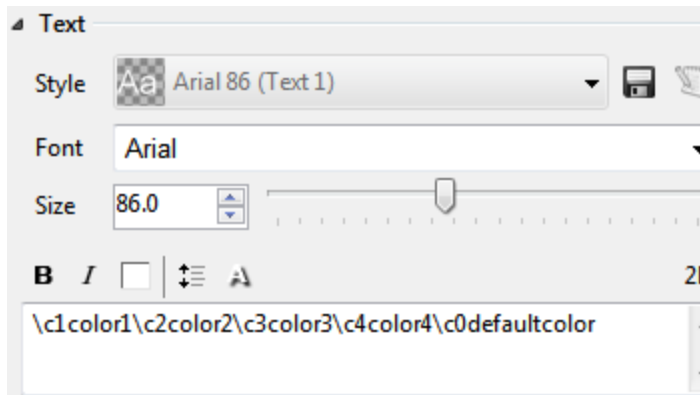

Style Tags

Style tags are effects. See the section on “Style Tags” in the effects section.

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Tube Object

Transform Properties

The **Transform** subcategory allows for the manipulation of the Video Input Objects **Position**, **Scale**, **Rotation** and **Pivot** along the XYZ axis.

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

Data Properties

Point: Adds or removes a data point

Data: CSV data in format: "x1,y1,z1\nx2,y2" \n is a new line character.
You can use pipe "|" character instead of new line.

Path Length: Limit length of the tube. Value is relative. 0 is no tube drawn, 1 is full tube drawn.

Texture Map: Type of V texture coordinate mapping.

Texture V mapping type:

ABSOLUTE - V goes from 0 to path's length.

Unless the extrusion is very small, this length will probably be much larger than 1.0.

RELATIVE - V goes from 0 to 1 over the whole path.

SEGMENTED - Integer part is equal to segment's index (from 0) and fractional part goes from 0.0 to 1.0 on every segment.

Contour Properties

Aspect: Higher value makes it wider.

Rotation: Contour rotation in degrees.
Useful for low tessellation settings. Applied before Aspect!

Diameter: Contour diameter (tube thickness).

Tessellation: Higher tessellation makes the contour smoother but consumes more resources to render.

Smooth: Set to checked to make the contour faceted.
Set to unchecked to make it smooth.

Video Input Object

Properties ✕

Video Input 1 📁

> Render

∨ Transform

Position X Y Z

Scale ◆ X ◆ Y Z 🔒

Rotation ◆ X Y Z

Pivot X Y Z ▼

Origin X Y ▼

∨ Surface

Size Width Height 🔒 ▼

Opacity

∨ Video Input

Input Downstream Input ▼

∨ Audio

Volume ▲▼

Channels	Outputs							
	1	2	3	4	5	6	7	8
1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

The following settings may be configured on the **Video Input Properties** window:

- **Name** – The user-friendly name to refer to the object throughout the application

Render Properties

The **Render** subcategory includes:

- **Projection** – Projection mode. It is method how to map 3D objects to 2D screen plane.
 - **Orthogonal** - Orthogonal projection.
 - **Perspective local** - Central projection. The mid-point of projection is affected by an object.
 - **Perspective Global** - Central projection. The mid-point of projection is immovable in screen coordinates.
 - **Camera** - Projection in line with an external camera.
 - **Camera Lens** - Special kind of projection in line with an external camera. Only the lens are tracked, it means just projection. The view matrix is the identity matrix, it doesn't depend on a location or camera direction.
 - **Ortho Parent Offset** - Orthogonal projection. The center of coordinate system is offset by current node position in the view of parent projection and transformations.
- **Projection Center** – Center of projection. (Position on the screen where all lines meet in infinity.)
- **Light Enabled** – Enable use of lights. Applies only to object with generated normals. This feature is ignored when using shaders.
- **Double Sided** – Double side visibility.

Transform Properties

The **Transform** subcategory allows for the manipulation of the Video Input Objects **Position**, **Scale**, **Rotation** and **Pivot** along the XYZ axis.

Position: Position the object in X, Y or Z

Scale: Scale the object in X, Y or Z

Rotation: Rotate the object in X, Y or Z

Pivot: Move the Pivot Position of the object in X, Y or Z

Origin: Move the Origin Position of the object in X, Y or Z

- To keep the Scale Aspect fixed to its current dimensions, click the lock icon to Lock Aspect Scale.


Surface Properties

The **Surface** subcategory includes:

- **Size Width**
- **Size Height**
- **Opacity**

Video Input Properties


The **Video Input** subcategory allows the user to select the SDI Input.

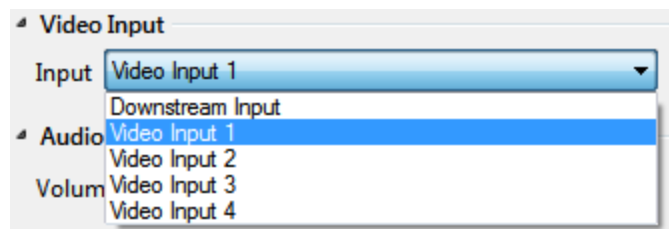


Audio Properties

The **Audio** subcategory includes:

- **Volume** – Decibel levels
- **Channels** – The Audio Router is a matrix for routing inputs to outputs. The default is 1 to 1 etc.

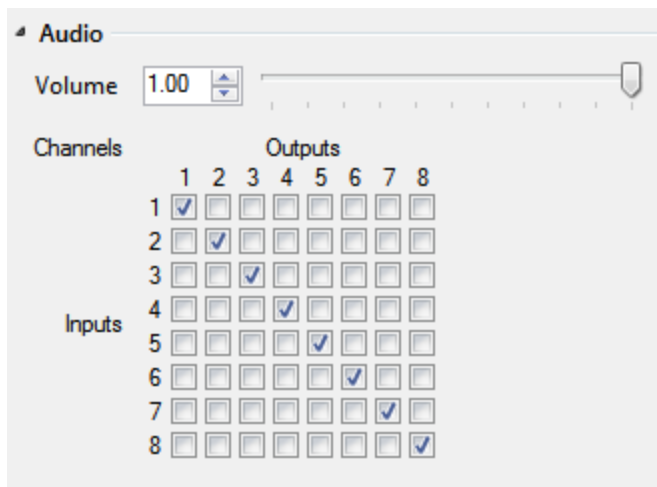

- o Duck Audio Channels 1 & 2 example action:

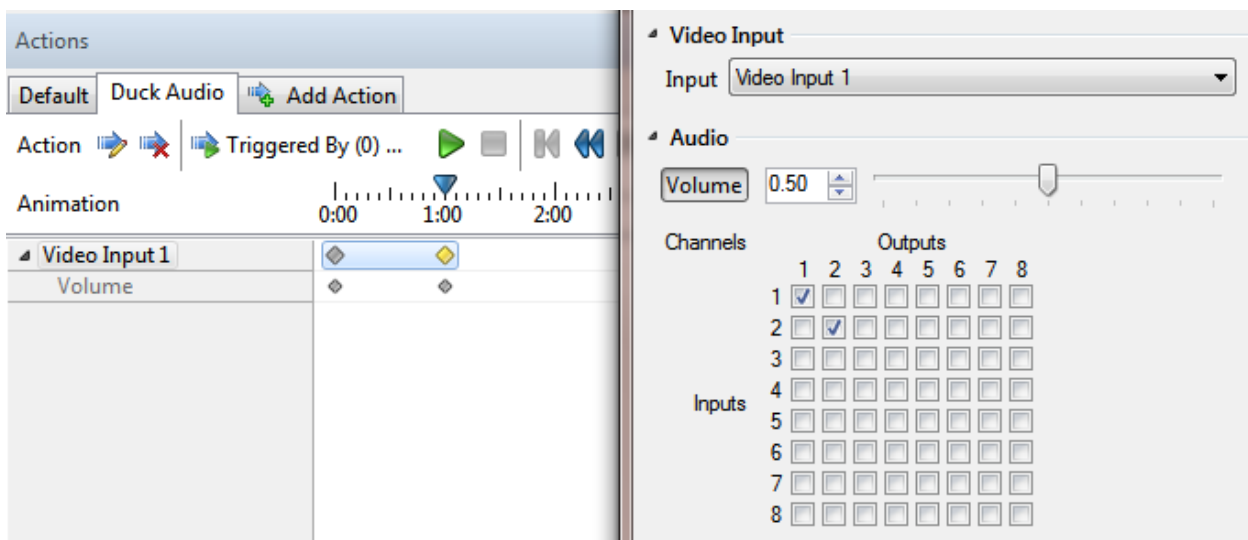


Video In Events

The screenshot shows the 'Events' tab in the Chyron PRIME interface. Under the 'Property Changed' section, there are '+ Add' and '- Remove' buttons. Below these is a table with two columns: 'Property' and 'Triggers'. The 'Property' column contains a list of properties, with 'Input' selected. The 'Triggers' column contains a dropdown menu.

Property	Triggers
Input	
DoubleSide	
Enabled	
Height	
Input	
LightEnable	
Locked	
LockScaleAspect	
LockSizeAspect	
Opacity	
OriginX	
OriginY	
PivotX	
PivotY	
PivotZ	
PositionX	
PositionY	
PositionZ	
Priority	
Projection	
ProjectionCenterX	
ProjectionCenterY	
RotationOrder	
RotationX	
RotationY	
RotationZ	
ScaleX	
ScaleY	
ScaleZ	
Volume	
Width	


Alignment Tools

Accessible by the toolbar.




Align

- Align Edges – Aligns the bounding boxes.
- Align to Safe Title – Aligns the bounding boxes to safe title.

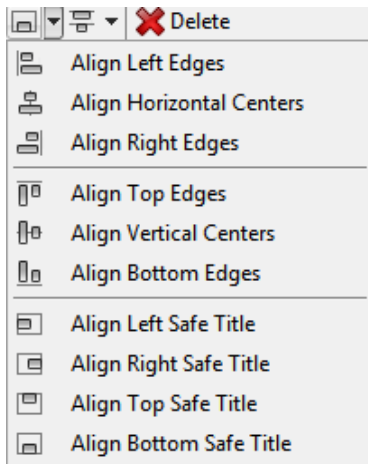


Distribute


- Evenly distributes three or more selected items evenly

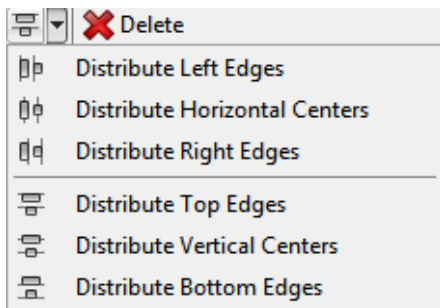

Snap to Grid

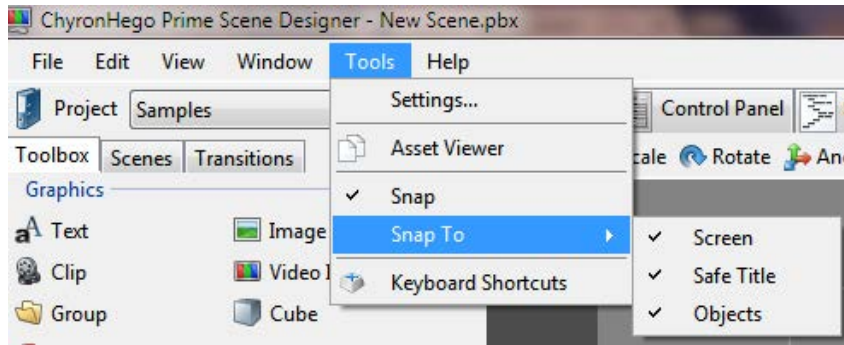

Color Picker-Eye Dropper

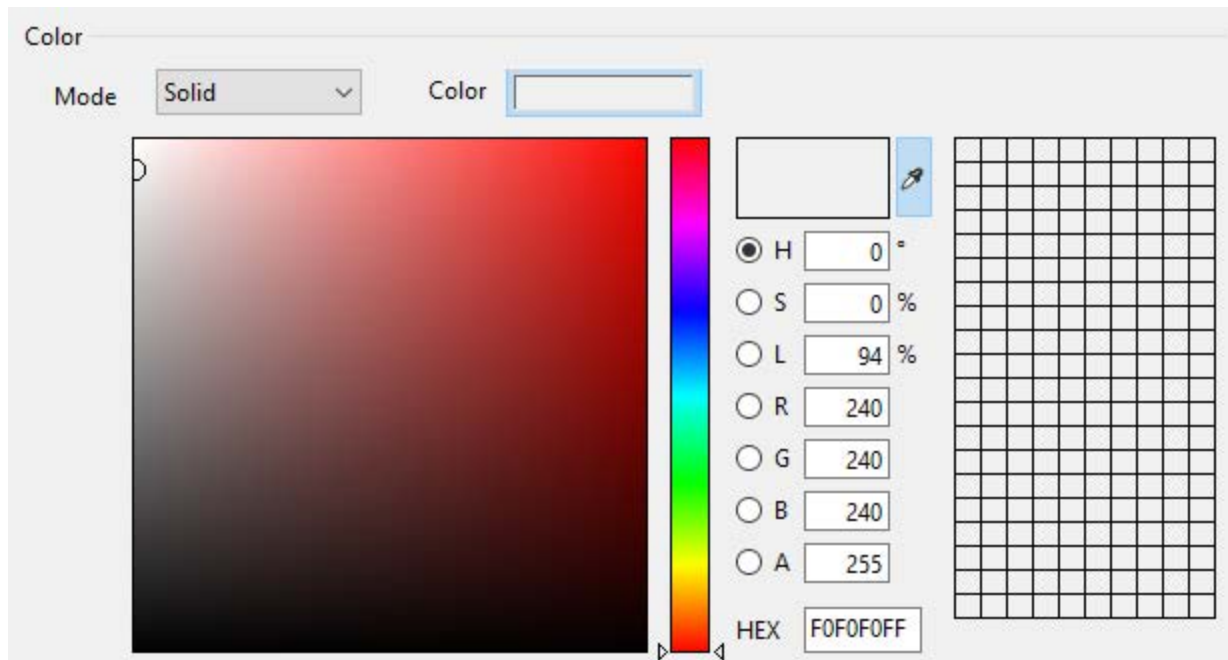

The color picker can do RGBA or HSL or HEX.

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

The eye dropper is a mode when selected gives you use of the eye dropper cursor to select colors from the screen. Users can pick colors from any application running.

Color swatches are saved globally with the color picker tool.

Pressing the eye dropper toggles the mode.



Effects

Align



The Align effect will automatically distribute all child objects dynamically at run time.

The Align effect will most likely be used with the Auto Spacing effect.

The Align effect can only be applied to Group objects

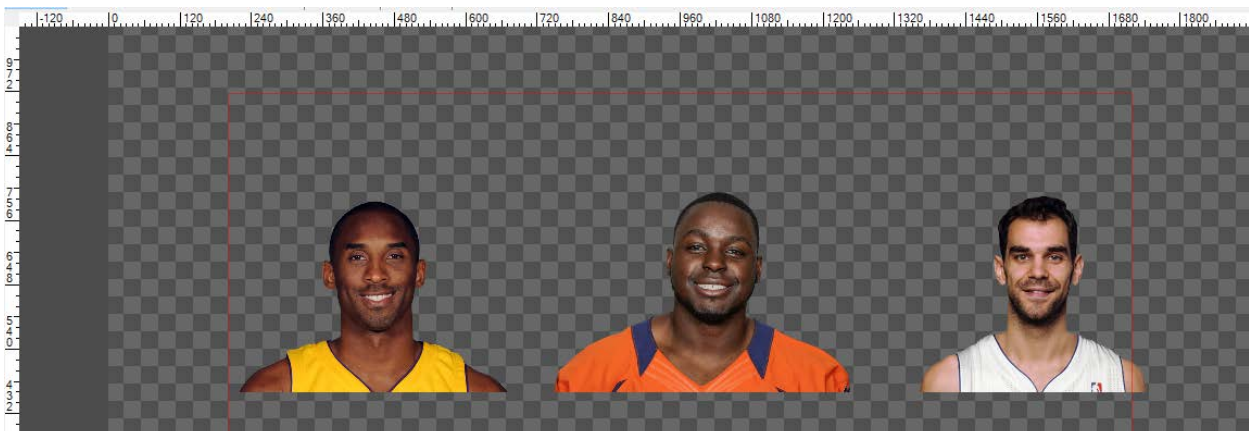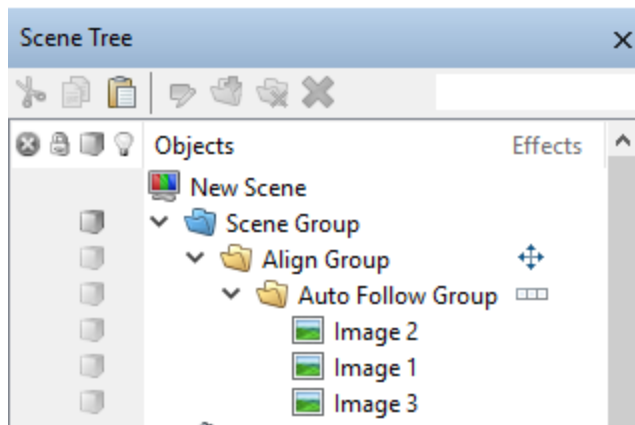

Removing an image object will create this result

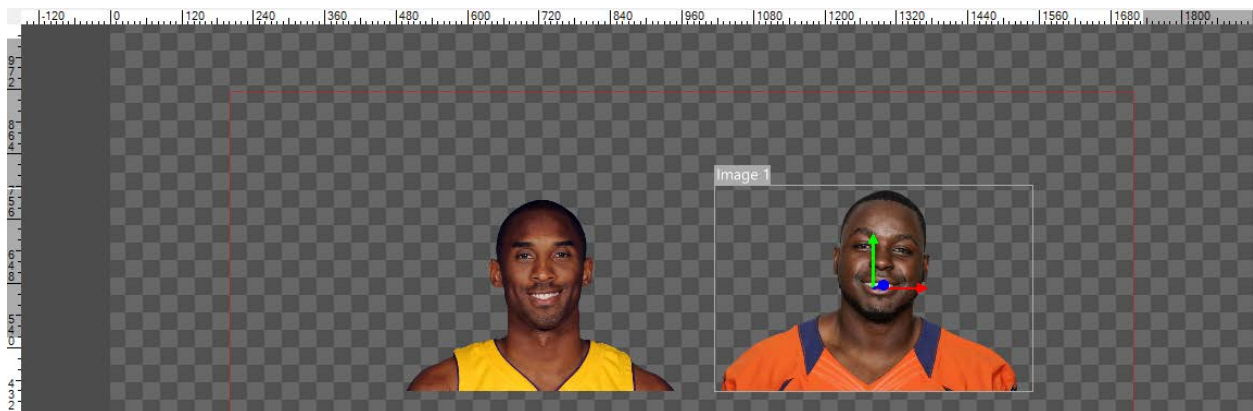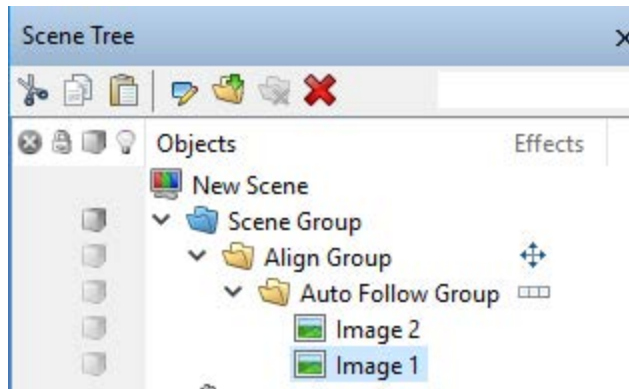


Horizontal: Align children horizontally

Vertical: Align children vertically

Auto Follow

Sibling Mode

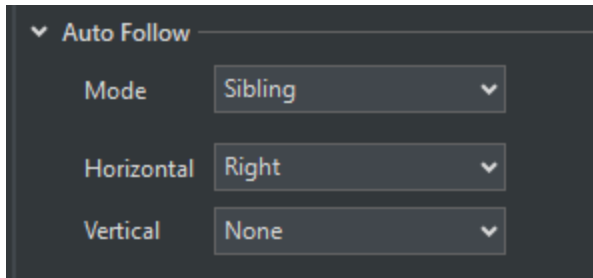

The Auto Follow rules of sibling mode are NOT Master/Follower necessarily. Based on the position of the elements in the scene The Auto Follow Effect is basically an Auto Align effect. Consider the object the effect is placed on as the **following** object. It will follow any of its parents.

The “Parent” is not defined. The “Parent” is the nearest object to the Follower. The Parent object can change dynamically.


Horizontal:

- None:
- Left: Follows the left edge of the nearest object maintaining distance
- Center: Follows the center position of the nearest object
- Right: Follows the right edge of the nearest object


Vertical:

- None:
- Top: Follows the top
- Middle:
- Bottom:

In the following example the effect is placed on a group that will follow its siblings:

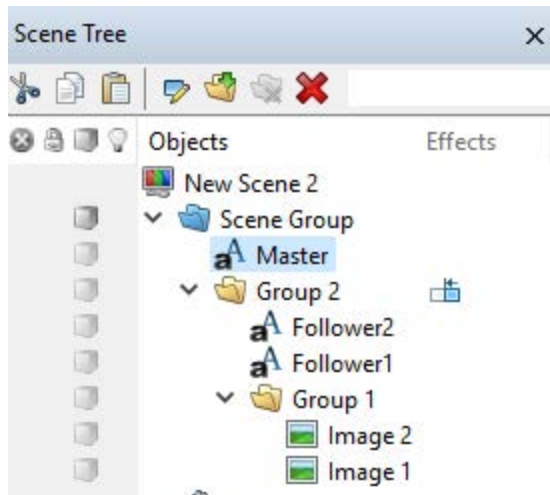

The result is whenever the “Master” Text is moved on the X position the follower groups, both Group1 and Group 2 will follow.

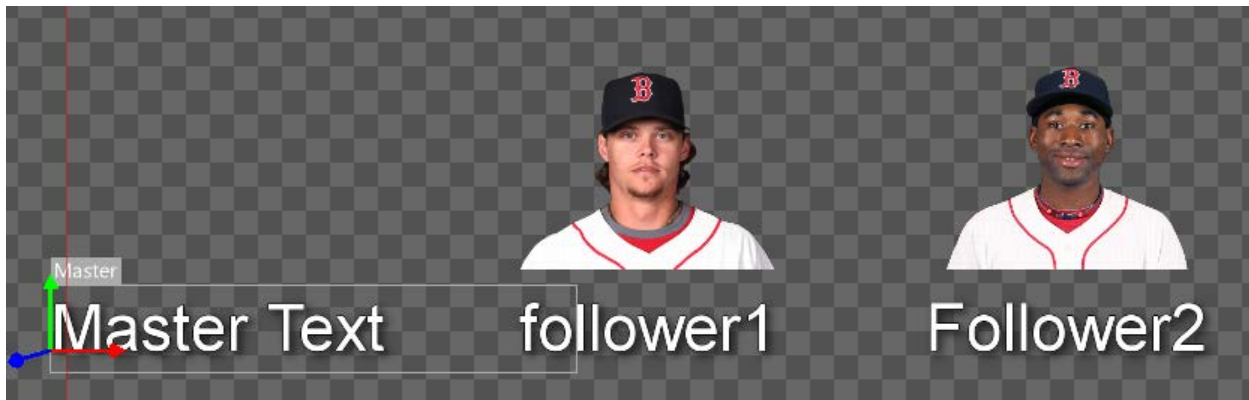

Source Mode

Different to Sibling mode, Source mode allows you to select a specific object or group that you wish to follow and size to.

- Position
 - X: Enable and select appropriate source to follow on X axis
 - Y: Enable and select appropriate source to follow on Y axis

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

- X & Y source can be different
 - Source: Select source available in scene
 - Source from Base scene is not accessible
 - Anchor
 - X: Select Source Origin, Left, Middle or Right
 - Y: Select Source Origin, Top, Middle or Bottom
 - Target
 - X: Select Source Origin, Left, Middle or Right
 - Y: Select Source Origin, Top, Middle or Bottom
 - Offset: Apply numeric value if offset is desired
- Size
 - Width: Enable and select appropriate source to size scale width
 - Height: Enable and select appropriate source to size scale height
 - Padding: Apply numeric value if padding is desired
 - Minimum: Apply numeric value of smallest width and height values you wish to size to. If source object is smaller than minimum, then minimum value will be honored.
- Advanced
 - Include Source Position
 - Include Source Scale
 - Use Parent Virtual Bounds
- Expressions: (*This is Read only and not editable*)
 - Visual representation for each position and size selection made, and the corresponding expression syntax, calculated value and binding.

Properties Events

Auto Follow 8

▼ Auto Follow

Mode

Target

▼ Position

X Y

Source

Anchor

Target

Offset

▼ Size

Width Height

Source

Minimum

Padding

▼ Advanced

Include Source Position

Include Source Scale

Use Parent Virtual Bounds


▼ Expressions

Expression	Value	Bindings
GName.PositionX + (GName.BoundsLeft) + (GName.BoundsRight - GName.BoundsLeft) + 178	727.52344	Parent.Posi...

Auto Hide


The Auto Hide effect allows users to hide/show objects based on the Boolean evaluation of other objects in the scene. Ex: Hide MyImage if Text1 is empty.

Example Scene Tree where the Auto Hide effect is placed on the Image object:

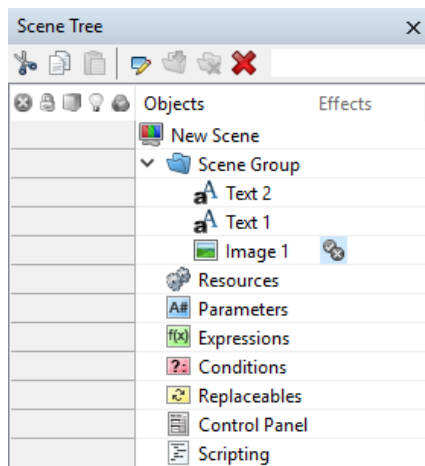


There are three modes for Auto Hide

- Hide on Target Empty
- Hide on Target Not Empty
- Hide on Condition

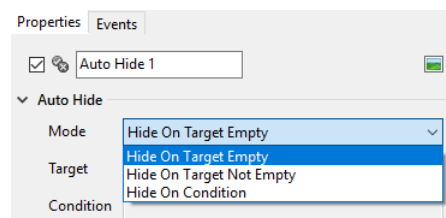


In the first example the Image object will hide if Text 1 is empty and in the second example the Image object will hide if Text 1 is NOT empty:

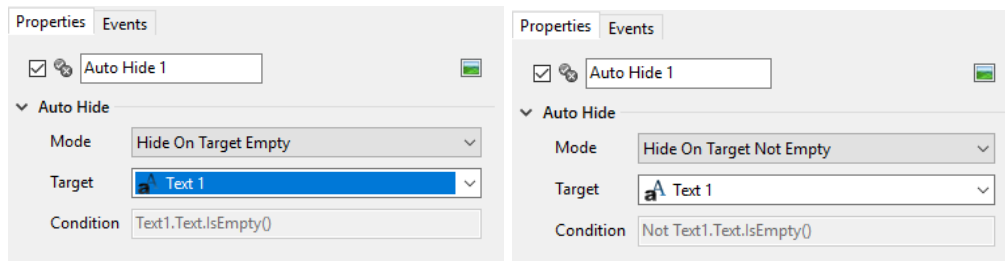


Note that the “Condition” property will always show you what the actual condition is that will be evaluated. The condition property will only be enabled when “Hide on Condition” is selected allowing the user to manually create a condition.


Hide on Condition allows the user to manual insert a statement that should evaluate to TRUE or FALSE is satisfy the Auto Hide condition.

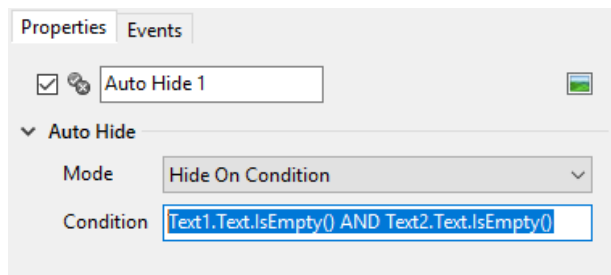

Auto Scale

The Auto Scale effect can be used to scale text within its bounds. This is a useful feature for bullet point graphics.

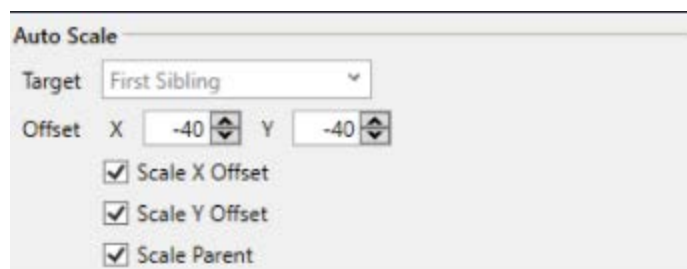

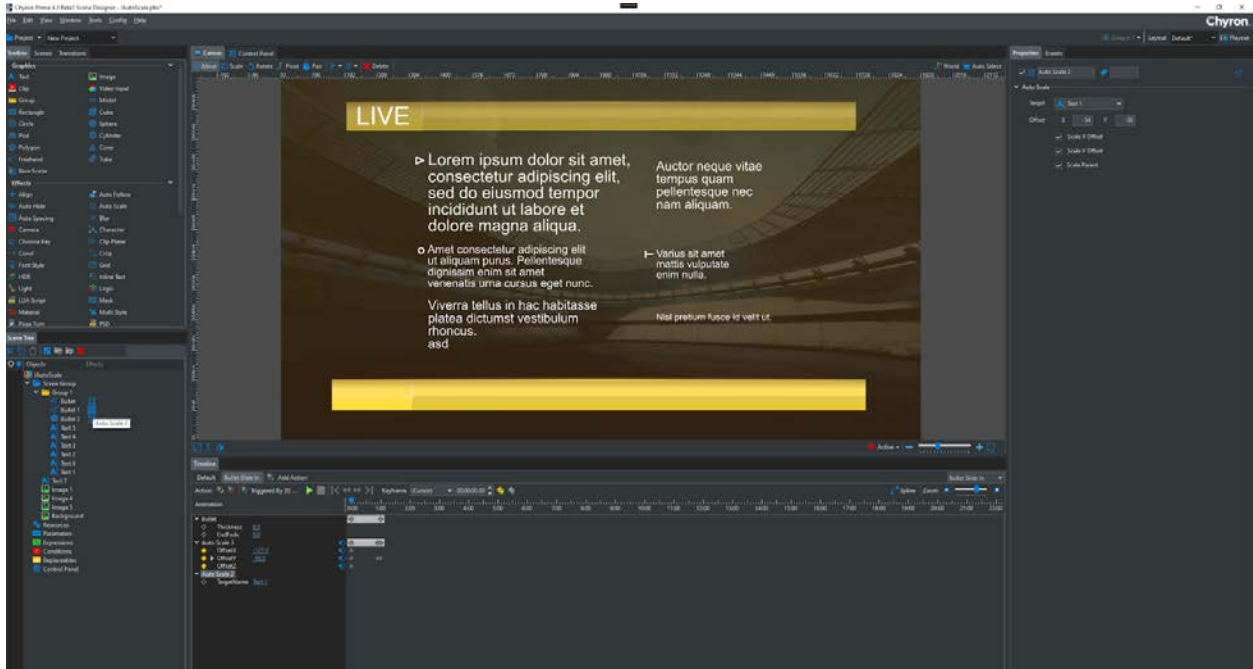


Auto Spacing

The “Auto Spacing” effect can only be applied to Groups. Objects within the groups will be linked.

Alignment Type

- **Tight** - Objects are tightly positioned side by side.
Additional space defined by attribute Spacing is added.
- **Fixed** - Objects are placed at fixed pitch.
The object size has no effect on positioning.
The pitch is defined by attribute Spacing.
- **Justified** - Aligns the row to the left and to the right at the same time. The margins are [0, Line Width]. The minimal spacing between objects is defined by attribute Spacing

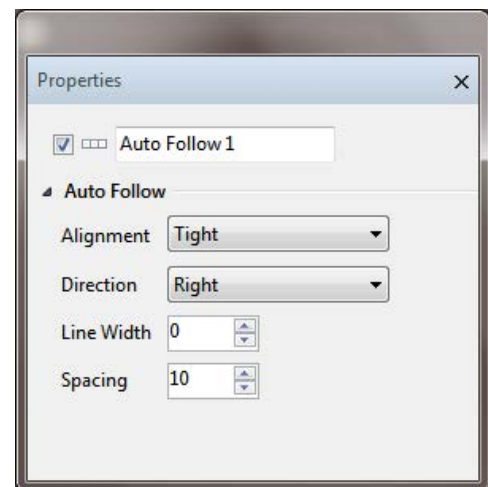

Direction

- **Horizontal** - Objects are positioned horizontally from left to right. Only X coordinate is modified.
- **Up**- Objects are positioned vertically from bottom to top. Only Y coordinate is modified.
- **Down** - Objects are positioned vertically from top to bottom. Only Y coordinate is modified

Line Width- Defines maximal size of row/column.

When total size exceeds this limit then the objects are scaled down.

Size of objects before pivot is not counted for the size

Spacing- The value defines pitch or additional space. See Alignment type.

Billboard


Billboard effect allows you to define the rotation of an object(s) within your scene towards a specified camera

Transform

- Rotation: Sets additional rotation which replaces rotation overridden by Billboard effect.

Billboard controls

- Type
 - Planar: Rotates the object in the direction parallel to the camera view vector.
 - Directional (default): Rotates the object in the direction towards the camera position.
- Target: Selects target camera for billboard effect. If empty, the object is rotated towards the active camera, which is the default target for billboard effect.

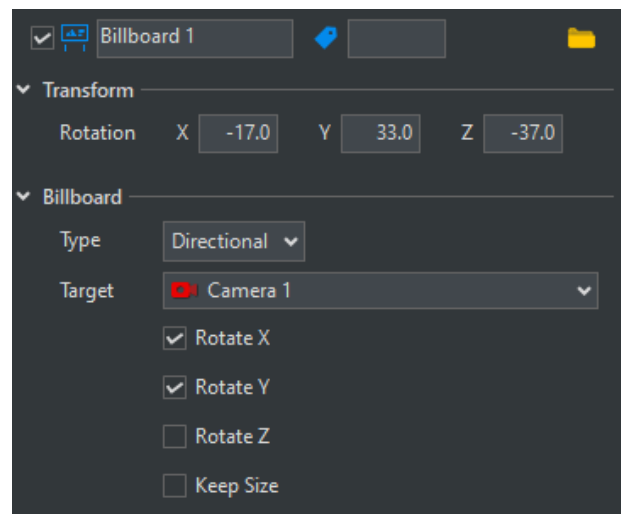

FOR MORE INFORMATION ABOUT CHYRON VISIT:


[HTTP://CHYRON.COM](http://chyron.com)

- Rotate X: If checked, rotates the object in the X-axis towards the camera (default true).
- Rotate Y: If checked, rotates the object in the Y-axis towards the camera (default true).
- Rotate Z: If checked, rotates the object in the Z-axis towards the camera (default false).
- Keep size: If true, maintains the size of the object normalized regardless of how close it is to the camera. The normalized size is the size that the object appears at when its Z position is at 0, and the camera is at its default Z position (default false).

Blur

Motion Blur: Performs a blur in one direction or two opposite directions based on the desired Angle


Compound Blur: Uses Level of Detail and neighbor pixel sampling to perform a blur in all directions

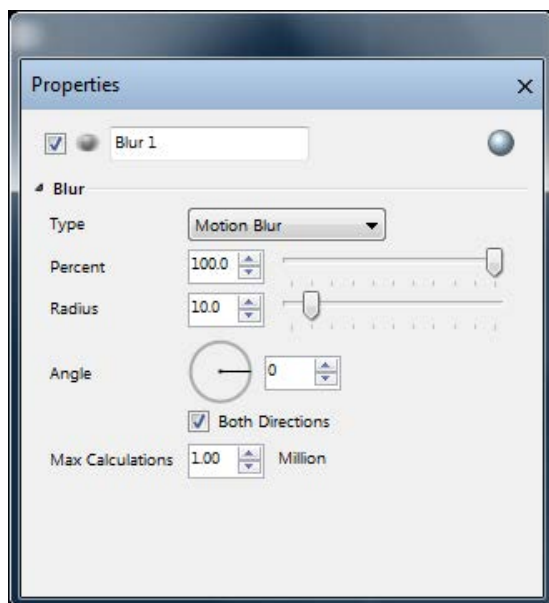

Camera

Scene cameras can be added to the scene group only. Scenes can have multiple cameras.

All properties of the Camera effect are keyframable.

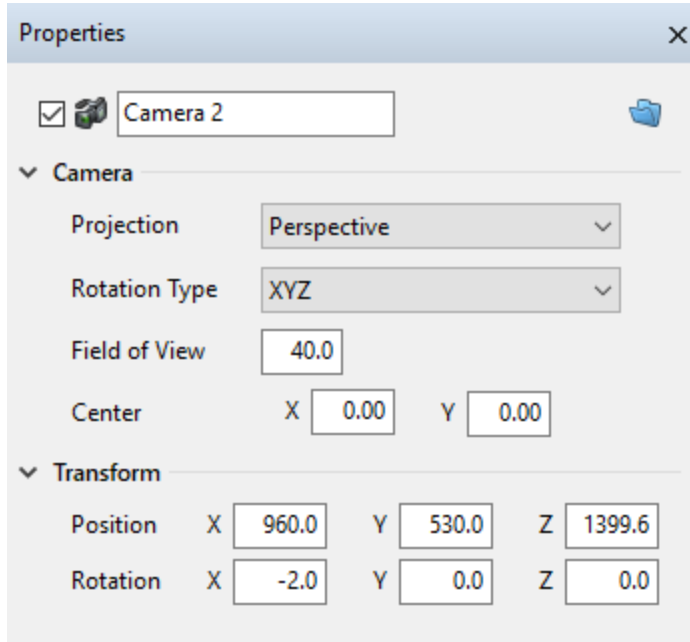

Projection

Perspective:

Orthogonal:

Rotation Type

XYZ:

Pan, Tilt, Roll:

Field of View


Transform

Position:


Rotation:

Character

The “Character Effect” allows animations to happen one character, one word or one line at a time. A character effect may be applied to a Text object only.

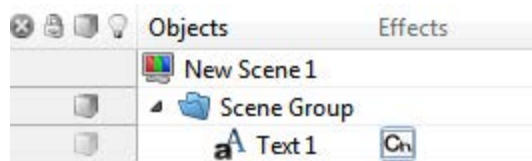


This adds a “Character to the canvas to allow you to create a character effect. The character is only in the canvas for editing purposes.

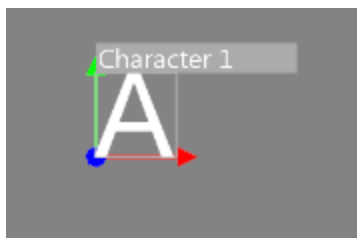

When the character is selected, the property editor for the character animation is displayed.

Mode


- **Character** – Each individual character will animate
- **Word** – Each word will animate as a group
- **Line** – Each line will animate as a group.

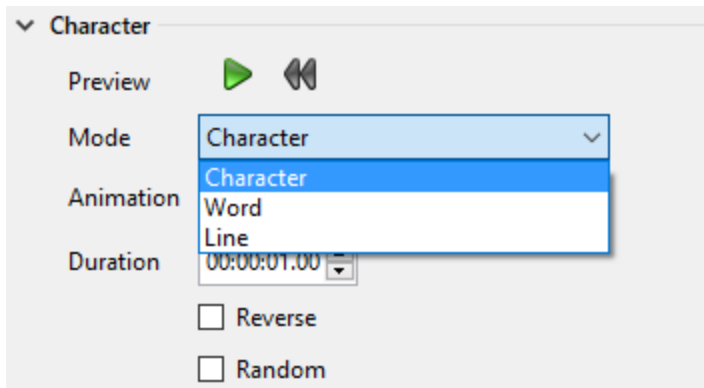


Animation

- **Total Duration** - Sets the duration of the animation regardless of the length of the text
- **Duration Between Elements** - Set the time for each character.
- **Reverse** - This will reverse the animation.
- **Random**- Elements will be animated in random order


Next Add a Transition to the Timeline Editor:

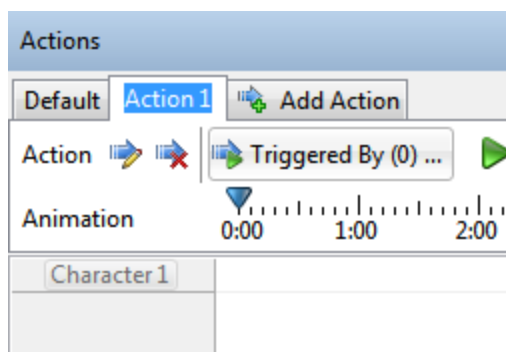

Next create any type of animation on “Character 1.” For example, a 360 degree rotation on the Z axis:

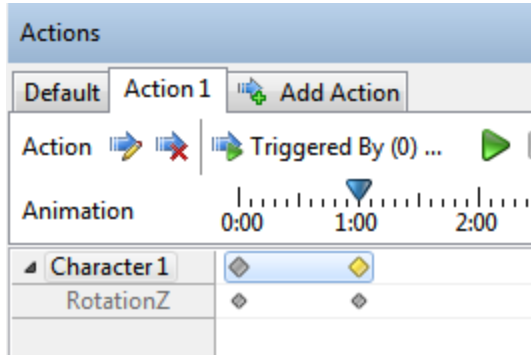


When this transition is played or previewed each character will rotate individually 360 degrees.

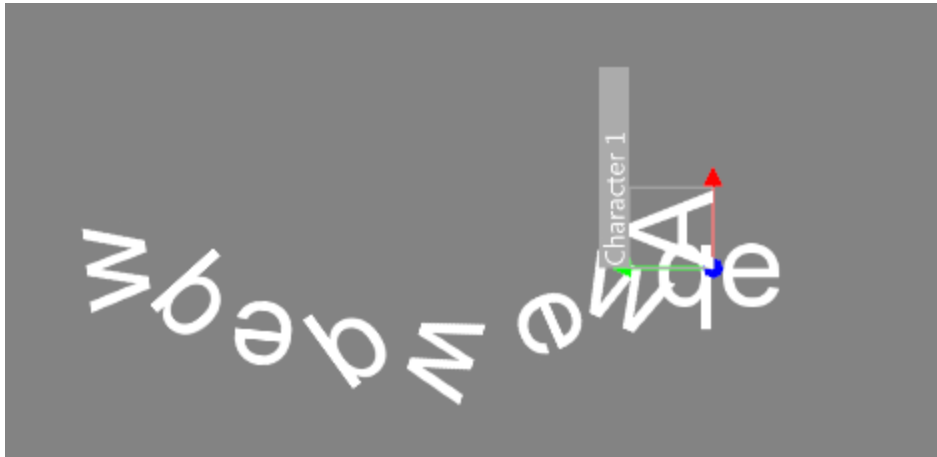

Chroma Key

The chroma key effect allows users to remove chromanace for an object.

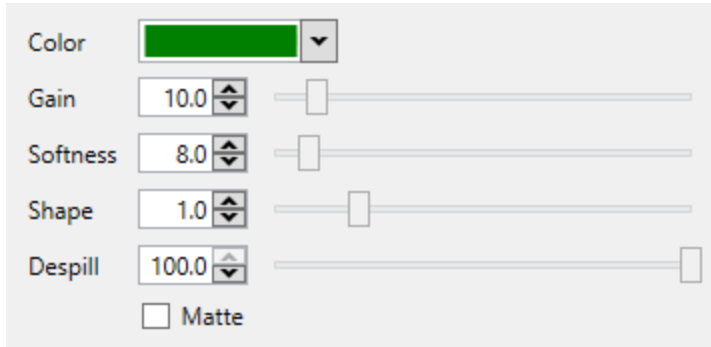

Color: The target color to make transparent


Gain: The hue threshold for the target Color. Increasing this value will make colors similar to the target Color also transparent

Softness: Sets pixels within the gain threshold to semi-transparent.

Shape: Linear to non-linear softness value adjustments

Despill: Removes some of the key color from the remaining pixels.


Matte: Shows the alpha values as grey scale. Select this option to fine tune your key.

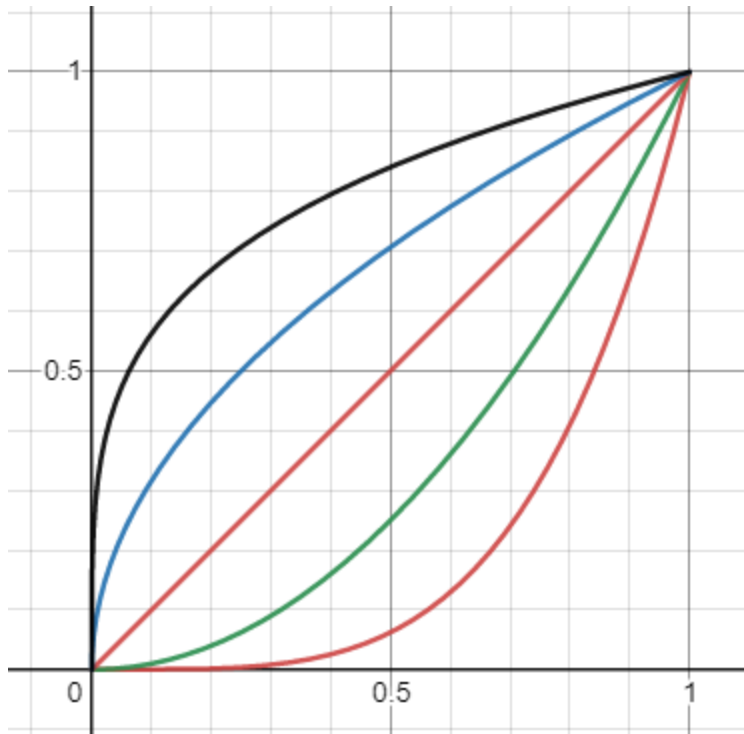

Shows various softness shape graphs.

Clip Plane

The Clip Plane effect allows for clipping in a single direction: Left, Right, Top or Bottom.

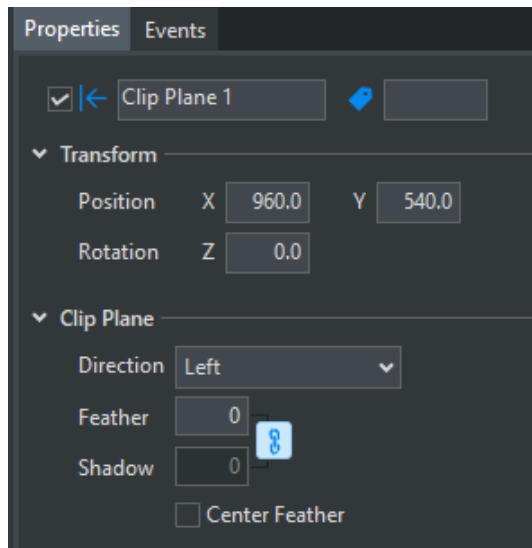

*There is a limit of 6 clipping fields in one single render path.

Transform - Allows positioning and rotation of the clip plane

Clip Plane - Select the direction of the clip plane

Feather - Applies soft edges to the clip plane

Center Feather - Centers the feather of both the fill and shadow of the parent graphic.

Crawl


The Crawl effect will cause all objects, including any child objects, to crawl Left or Right,


Selecting the Crawl effect creates a Crawl Box. In order for an object to be seen crawling, it must be inside the Crawl Box. The Crawl Box is similar to a crop box.

The crawl effect has two modes:

- 1.) Crawl from Text file or Select a Resource Data Object (This mode is automatically entered if a file is selected)
- 2.) Crawl from data (No file selected). Data source could be a control panel text box.

The “Data File browser” will show Text files and Data Objects in the Scene resource tree.

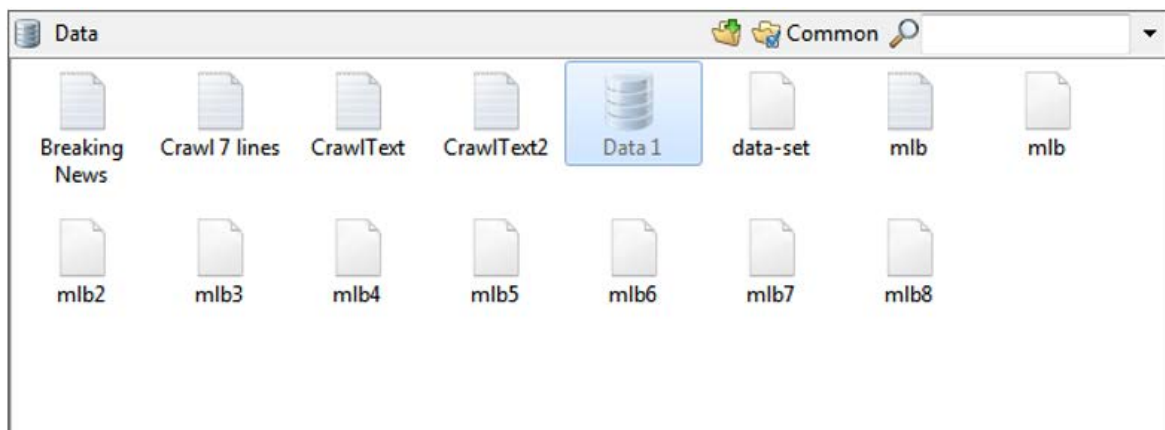


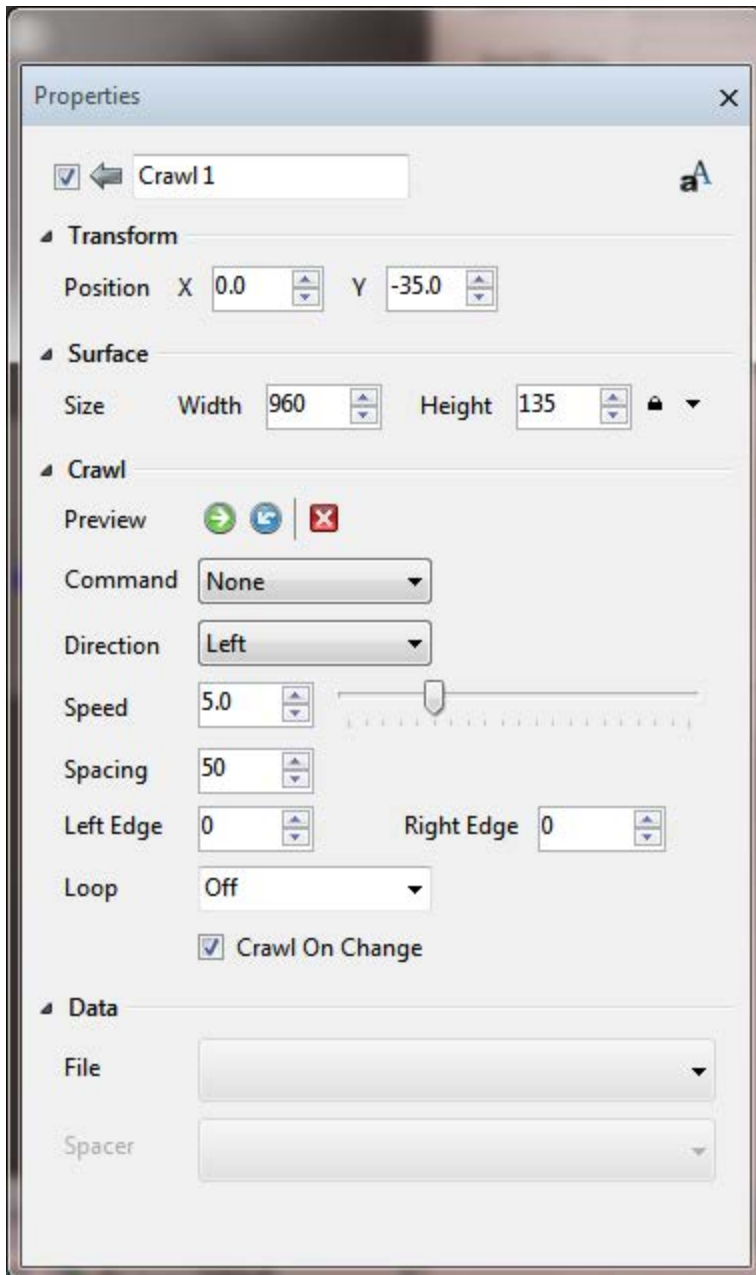

The spacer is only applied in "File Mode"


The spacer property can be an image, Text (Type text into the File drop down box) or a Render to Texture Group

With a Render to Texture Group all things can be crawled like 3D objects, Live video input etc.

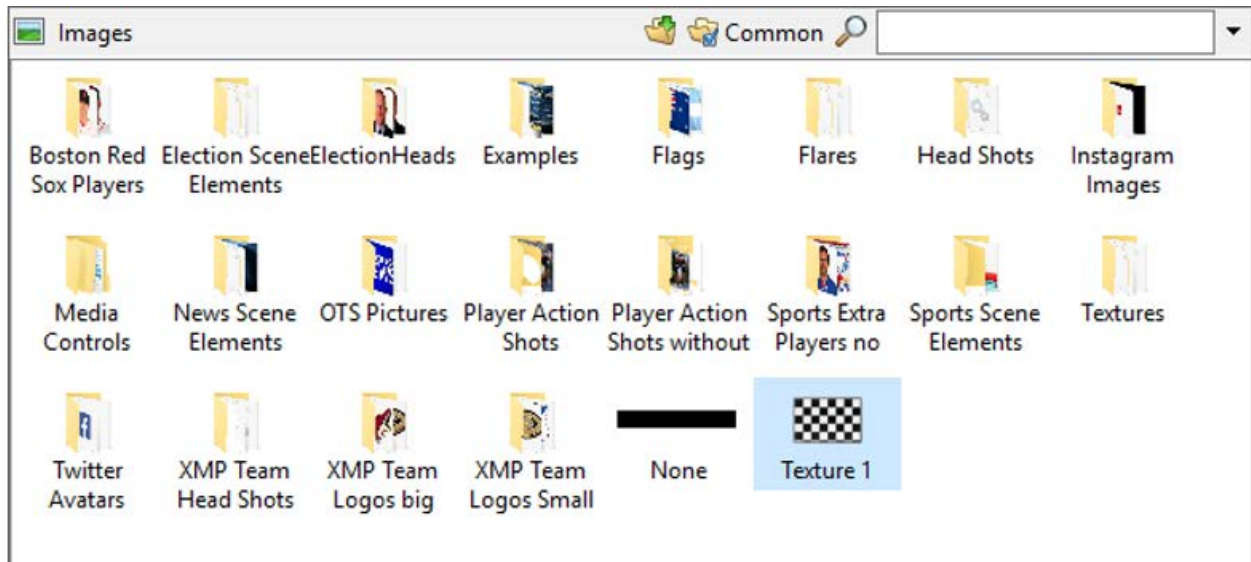

Texture 1 in this example is an image, Text and a 3D spinning logo.

The direction property allows crawling in 4 directions

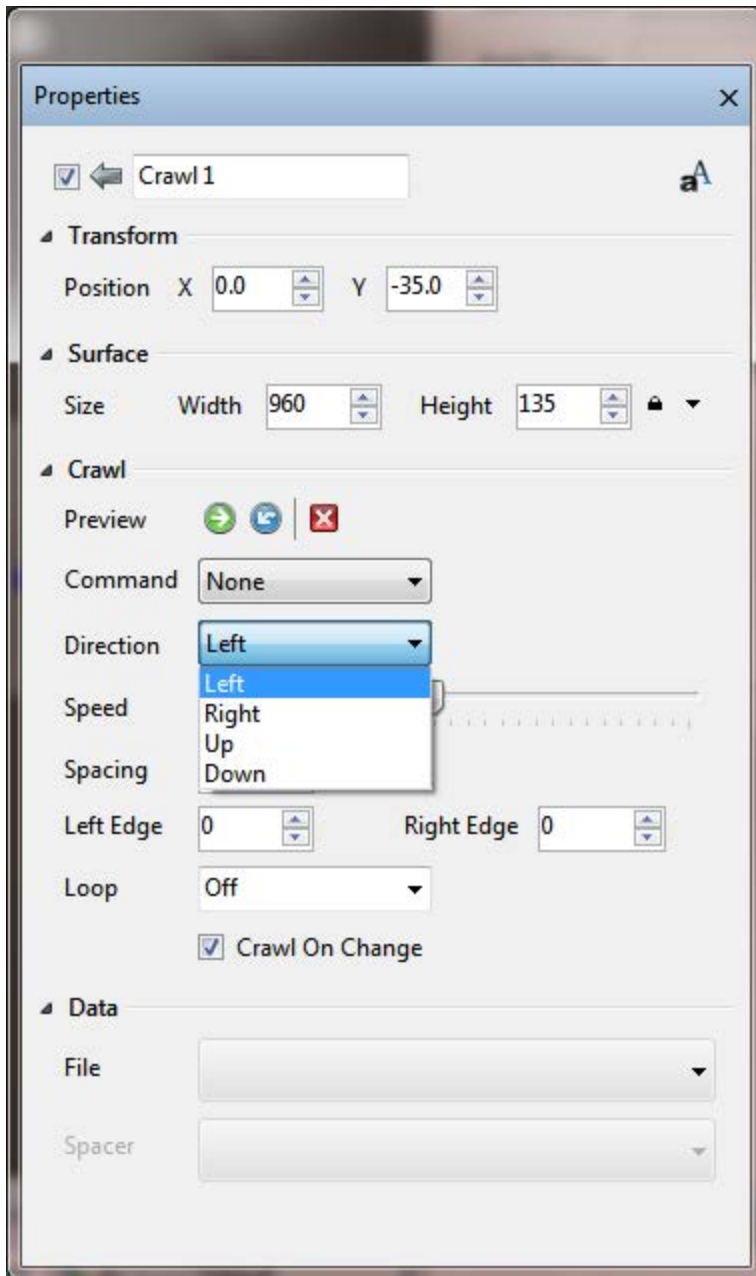

Crawl Commands

None: The crawl will remain in its current state

Update: Crawl the data already in the associated text box

Restart: Starts the crawl from the beginning of the data

Start: Start crawling the data

Stop: Stops the crawl and clears it


Pause: Pause the crawl in position

Resume: Resumes the crawl from the current position.

Clear: Clears the crawl

CrawlSpacer: Only displays the spacer in the crawl

Note: Only **None**, **Update**, and **Clear** will be available a data source is not present.

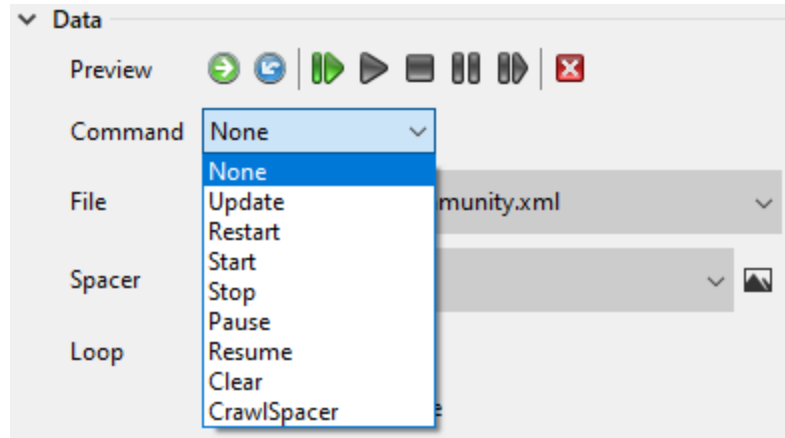


Crawl Events

Crawl events occur when specific conditions are met. The occurrence of an event depends on whether the crawl is associated with a text file or not.

Start of line

Occurs as the data enters the crawl box

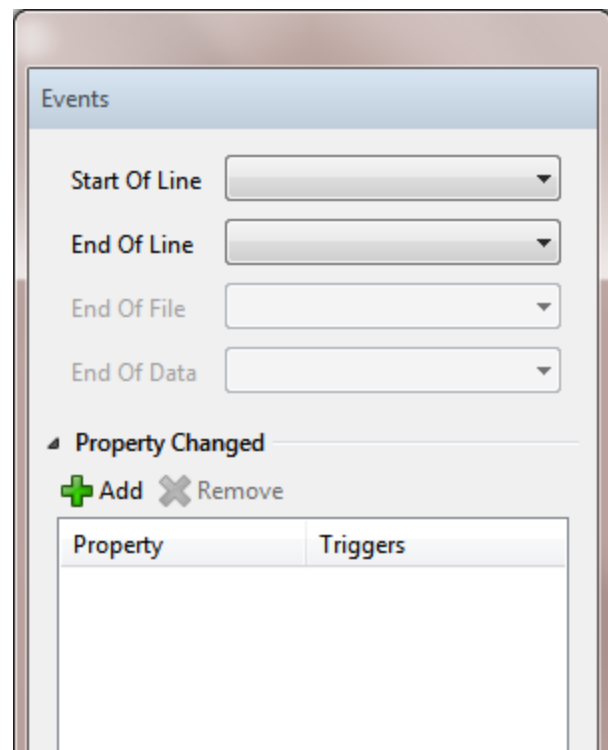

End of line

Occurs when the data exits the crawl box

End of file

Occurs when the last piece of data has been crawled when associated with a text file.


End of data

Occurs when there is no more data to crawl from an associated text file

Crop

Crop is a “Crop box” that allows cropping in 4 directions: Top, Bottom, Left and Right.

Each Crop effect is made up of 4 clipping planes. There is a limit of 6 clipping fields in one single render path.

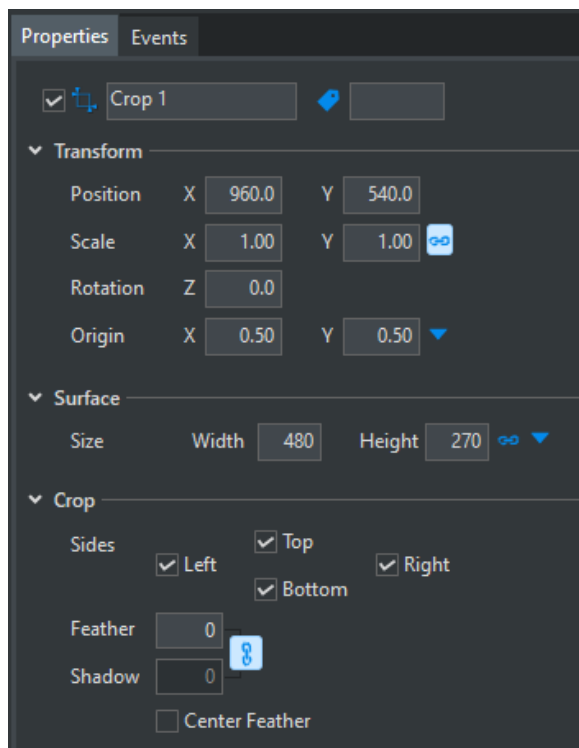

Transform - Allows positioning and scaling of the crop

Surface - Sets the surface size of the crop box

Crop - Select the sides of the crop box

Feather - Applies soft edges to the crop


Center Feather - Centers the feather of both the fill and shadow of the parent graphic.

Duplicate

The Duplicate Effect's intended use is to be a quick method for building a data bound table graphic in a fraction of the time. Best practice is to apply the Duplicate Effect at the group level, where a group with contents is duplicated.

Best Practice: Use Data Object to bind to a Table Resource and then enable Bind to Table within the Duplicate Effect. Under Table - Select the same Table Resource bound to data. Data bound to Table will automatically row pop, and advance to the next row of data on each duplicate. This will save designers hours of time previously spent individually linking each cell to the corresponding data source.

*It is recommended to make changes to the Group (parent) where the duplicate effect has been applied. If you are adding objects to the group or adding new bindings then revert the duplicate number to 1, apply changes and then increase the duplicate count to desired number to regenerate the duplicates.

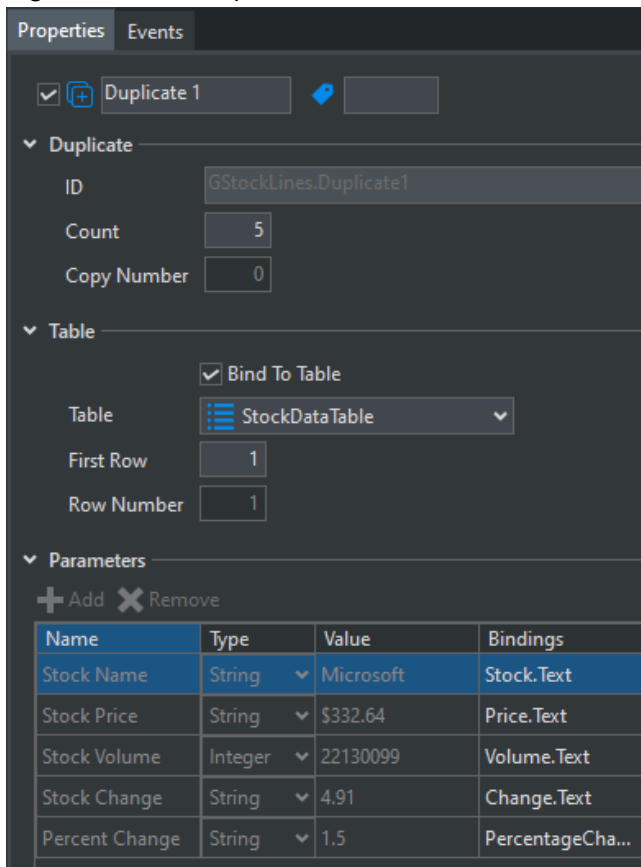


The screenshot shows the 'Properties' tab of the Duplicate Effect configuration. The 'Duplicate' section is expanded, showing 'ID' set to 'GStockLines.Duplicate1', 'Count' set to '5', and 'Copy Number' set to '0'. The 'Table' section is also expanded, showing 'Bind To Table' checked, 'Table' set to 'StockDataTable', 'First Row' set to '1', and 'Row Number' set to '1'. The 'Parameters' section is expanded, showing a table with the following data:

Name	Type	Value	Bindings
Stock Name	String	Microsoft	Stock.Text
Stock Price	String	\$332.64	Price.Text
Stock Volume	Integer	22130099	Volume.Text
Stock Change	String	4.91	Change.Text
Percent Change	String	1.5	PercentageCha...

ID - Name of scene tree object which contains Duplicate Effect

Count - # of times Duplicate Effect replicates the object ID within the Scene Tree

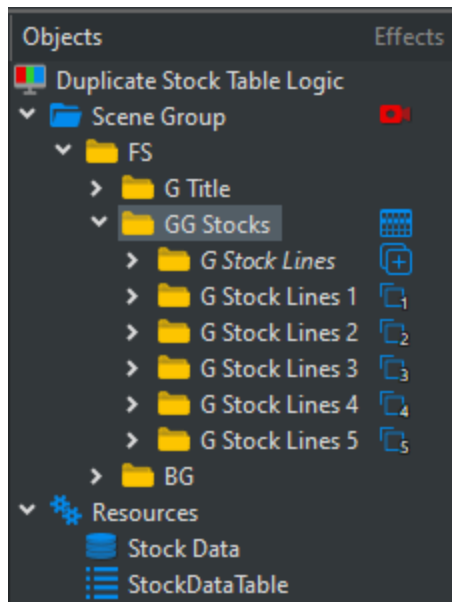

Copy Number - child Duplicate Effect identifier

Bind To Table - Drop down will display table resource available in scene

Table - Select table you want to bind to

First Row - Will display data from Table's first row

Row Number - Will display data from selected row number in table

Parameters

- Add & Remove
 - Only available if Bind to table is deselected
*If Bind to table is selected these controls are grayed out and not active.
- **Bindings** - Bind any object properties to a parameter
*Bindings can be set even when Add & Remove are grayed out.

Grid

The Grid effect will subdivide or duplicate the child graphic into multiple graphics depending on the Rows and Columns properties. The segments can then be modified and animated individually using the Transform, Surface and Grid properties on the Grid effect.

A vertical or horizontal blind look can be created by setting Rows or Columns properties to 1 and the opposite property to the desired number of blinds.

The Grid effect can only be applied to a subset of objects: Image, Cube, Sphere, ... Other graphics including Clips, Video Input and Groups can still be affected by the grid effect by using a Render To Texture effect on the desired graphic, then adding a Grid effect to an Image object that has its File property set to the render to texture output

Transform and Surface properties work the same as those in Graphic objects other than they affect the individual segments created by the Grid effect.


Grid Mode – used to set whether object is Subdivided or Replicated into rows and columns

Columns – number of columns to create

Rows – number of rows to create

Spacing – used to set and animate the spacing of the segments. 1.0 is normal spacing. 0.0 is all segments on top of each other.

Mirror Rotation – used to set opposite rotation values in X and Y for half of the grid segments

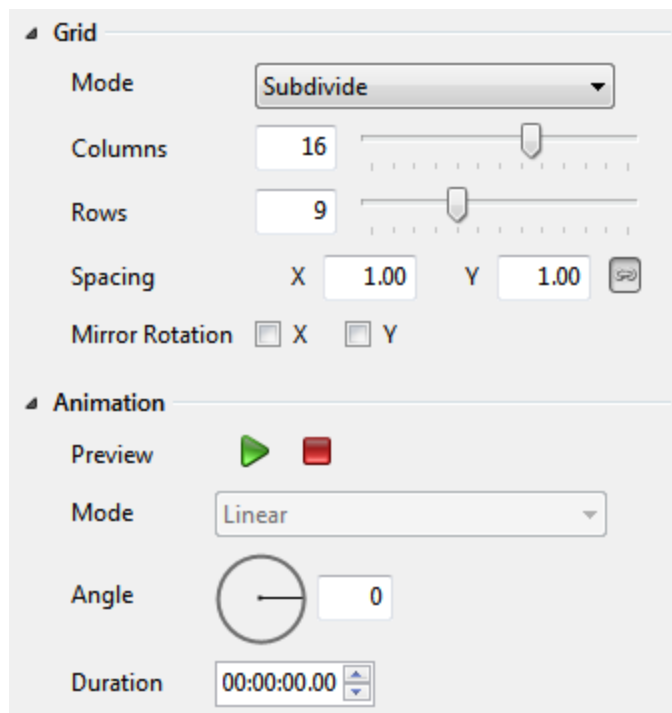

Animation Mode – used to determine the order in which grid segments are animated. Currently only Linear is supported


Angle – the direction in which grid segments are animated

Duration – used to add an amount of time between starting the animation of the first grid segment and the last grid segment to create a staggered animation effect. Set to 0 frames for no stagger


HDR

High Dynamic Range


Constant: No change in the curve just add more value to the existing range.




Linear: 1=No change. 2 would be 0 to 200% 3 would be 300% etc.



Squared: Curved Graph. Brighter areas become more bright. Darker areas are not as affected as much.




Cubed: Same as squared but with a more severe affect.




JavaScript

The Javascript effect can be applied on an object, group or scene level.


To import an existing JavaScript navigate to script file.

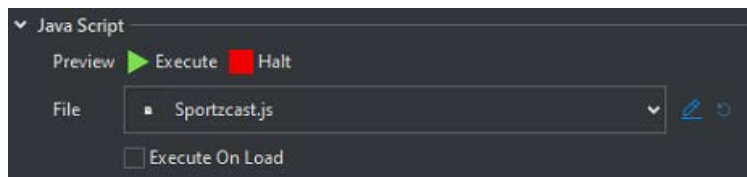

To add or edit a JavaScript select the edit pencil icon. This will open the Scripting panel within Prime. From here, you can Execute and Halt scripts for testing.

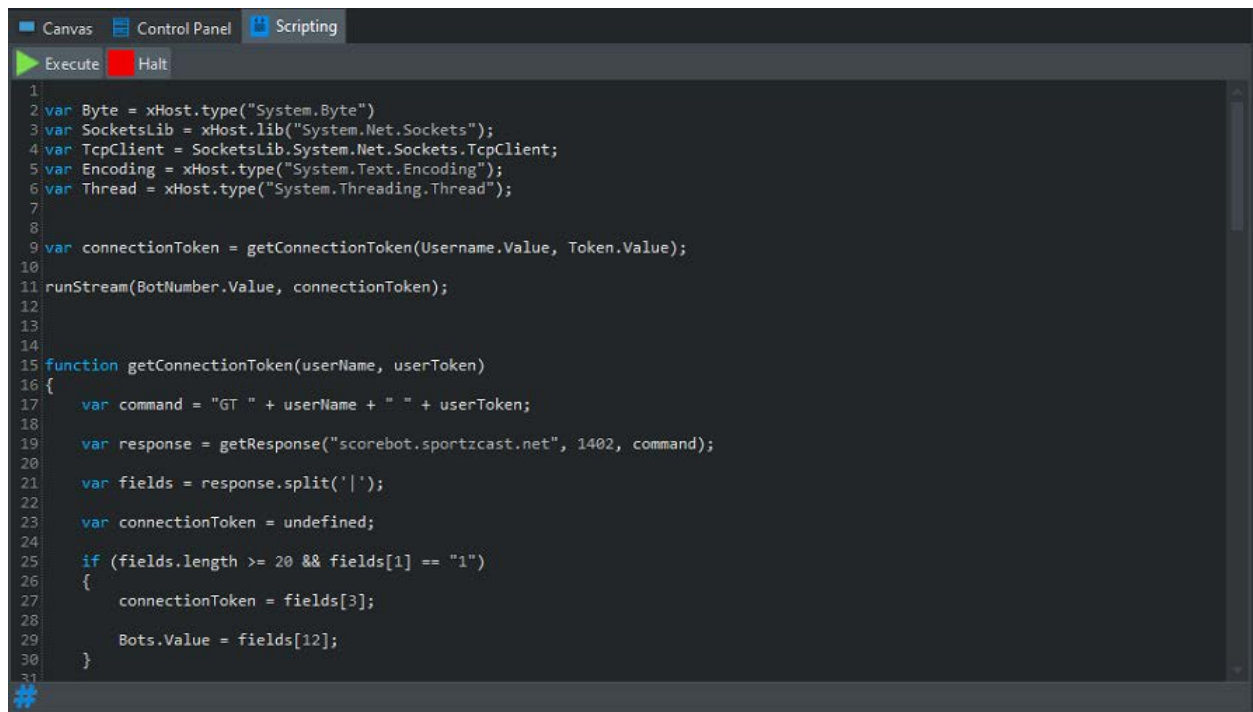


Press the Save icon to save any edits to the script.

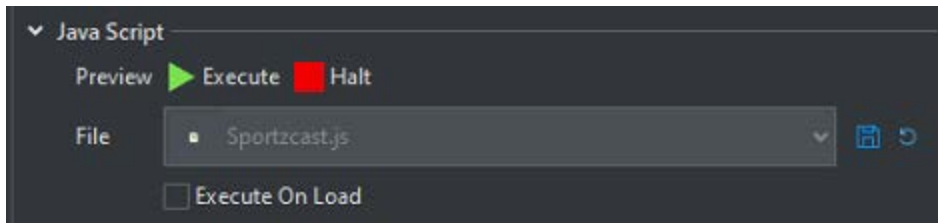

Option to enable “Execute on Load” for Script to evaluate upon Scene load in Prime playback.

JavaScript Local Parameters: Press Add to remove Parameters to a JavaScript Effect. Any Parameters added to the JavaScript effect will be saved with the effect itself. Option to bind any scene object to the JavaScript parameters.

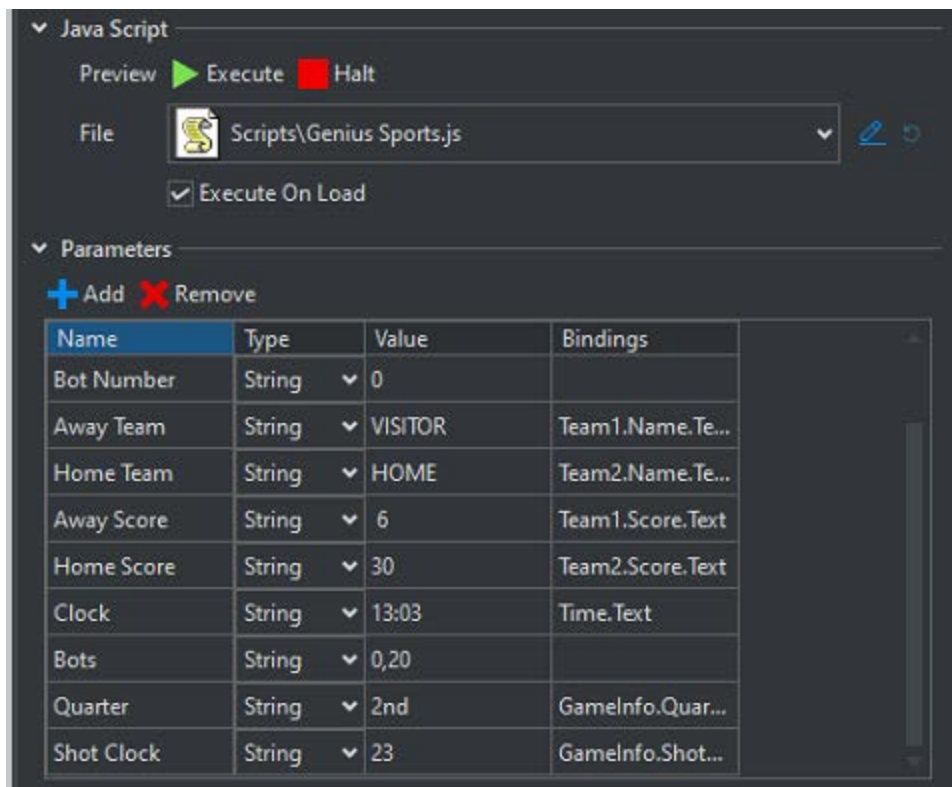


JavaScript Advanced Options: (settings are saved with the script)

Enable XMLHttpRequest: Allows you to download data

Window functions allow you to pop up windows. For example alert, confirm, prompt and message boxes.

Enable Extended Host functions: Enable for TCP clients, and other advanced objects. Without these checked functions keeps Prime in a Sandboxed mode.

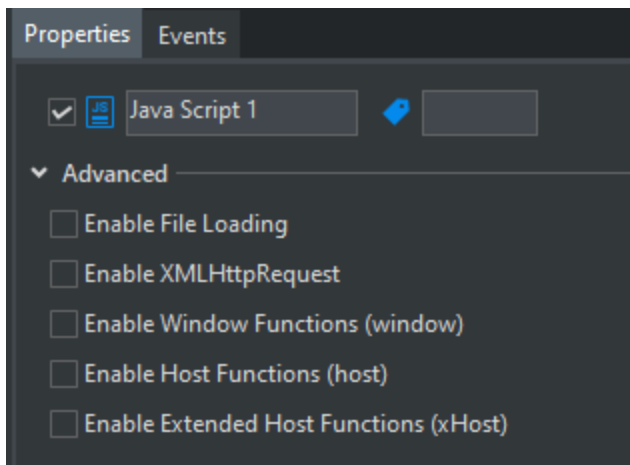

Inline Text

The Inline Text effect can be added to Group objects only. When added to a group object the objects within the group will no longer be part of the composited objects in the scene tree meaning that group stands alone. The object within the group are cached in memory and can be referenced as text tags in the Text Object. Text tags start with a backslash and are terminated with a semi colon. The letter “o” is an indicator that this is an “Object” tag followed by the name of the object. This method is the same as “Style Tags”. Refer to the “Style Effect”.

Example: Hello\oImage1;

The benefits of this approach is the objects can be animated individually. So, a crawl can have an animated Cube for example. A crawl “Trigger” can trigger an action that animates any of the objects in the “Inline Text” group.


Light

Type: Point or Directional

Diffuse: Light color.

Ambient: Ambient color applied to the material


Specular: Specular color applied to the material

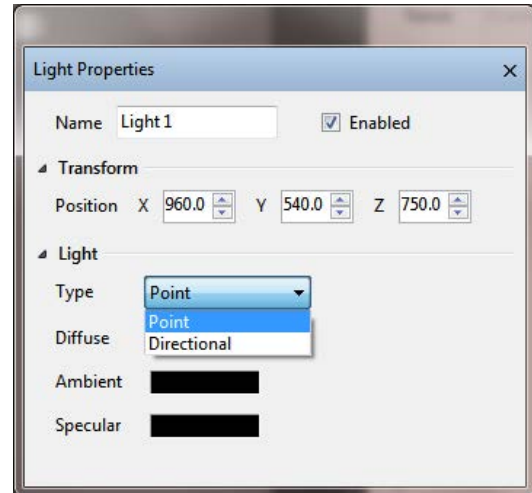

Logic


The Logic effect is a collection conditional and property statements which are applied to a Graphic Object. It is similar to Conditions but the statements are targeted to a parent object and its children. Logic has the flexibility to be reused in a scene saving the designer time when creating similar statements.

Logic Properties Controls

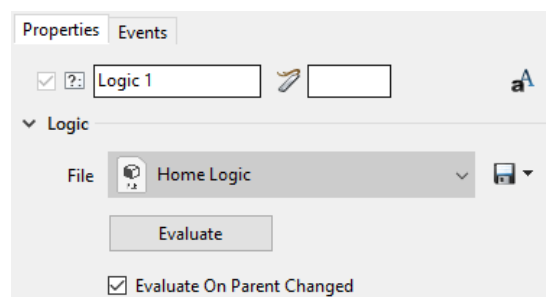

- **File:** Shows the last loaded or saved Logic effect file (.PLE).
 - Asset Browser Control: Load .PLE file into existing Logic effect


- **Save (Button):** Saves Logic effect to existing or new file. By default the .PLE files will be saved to the **Scripts** folder in the project directory.
 - Save
 - Save as
 - Reload From Disk: Remove changes and reloads the file.
- **Evaluate:** Applies or Evaluates Logic Effect in Designer
- **Evaluate On Parent Changed:** Applies the Logic effect to parent's default property changed event.
 - The binding is internal and is not shown in Object's Events Control
 - Example: If Logic effect is applied on Text Object. The Logic Effect will bind itself to the TextChanged Event. So whenever Text is changed on Text Object and the Logic effect statement will evaluate.



Logic Effect Parameters


Parameters are variables that can be used to store information like color, strings, integers, etc. Parameters can be accessed in conditional and property statements.

Parameter Changed Events: Logic parameters utilize Changed Events that can be used to trigger other types of commands and in methods in scene. The example below shows the “Home Team” parameter triggers the Logic effect to evaluate when the value of the parameter value changes.

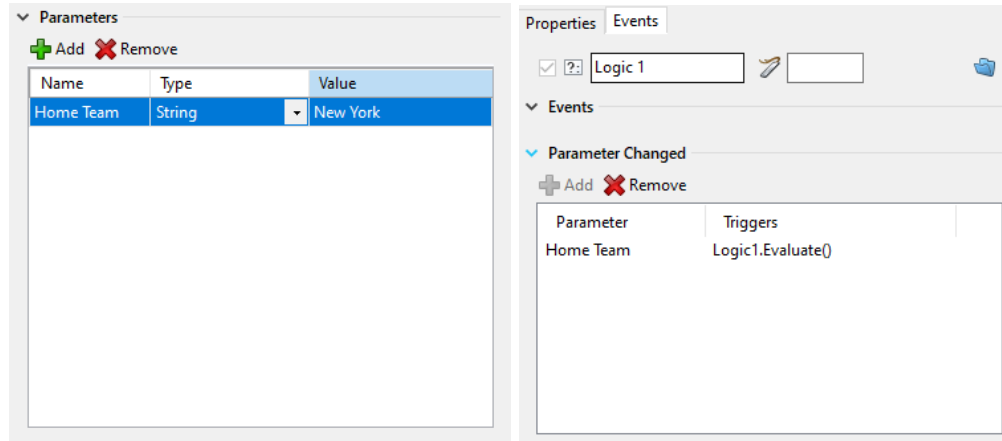

Evaluating Logic Effects

Similarly to Conditions, Logic effects should be told when to evaluate during playback. Evaluate commands can be accessed in event lists. This is an example of a Logic effect being evaluated on the Effect In event.

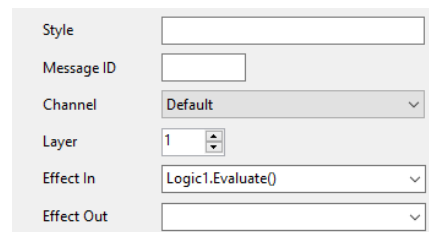


This method of evaluating Logic effects is in addition to the **Evaluate On Parent Changed** property previously mentioned.

Logic Effect Statements Editor


- Statements can be constructed by dragging object properties from the Property Pane (similar to Conditions). Users can also type statements with the assistance of PRIME's auto-complete tool.

Users who wish to reuse a Logic file in the same scene should consider giving graphic objects the same name. For this to work, objects must be placed in separate groups.


In the example below, a scene contains objects with identical names. The objects are contained in different parent groups with a Logic effect applied to the group, and both Logic effects are using the same .PLE file.

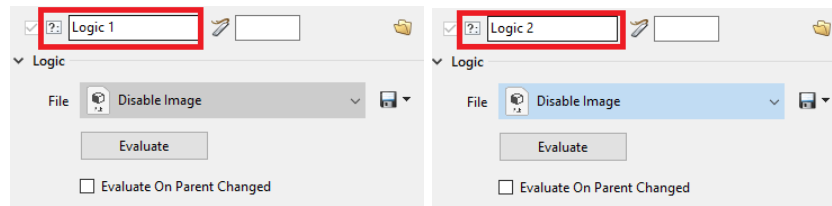

The statement contained in the .PLE file states that if “Text 1” is empty “Image 1” will be disabled. Since both parents groups contain child objects with identical names the applied Logic file will evaluate exact same.

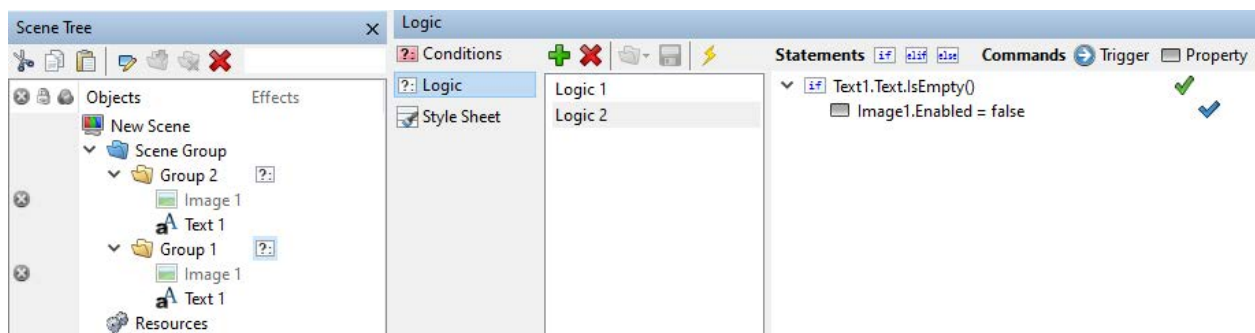



Additionally, the Logic Effect can be written to address the Parent it is applied to. This would allow for the names of the objects to be unique while still giving the benefit of duplicating the Logic. In the example below the same Logic Effect is applied to 3 different text objects. As the statement uses Parent.Text the object name does not matter, the logic statement will be applied to its parent object.

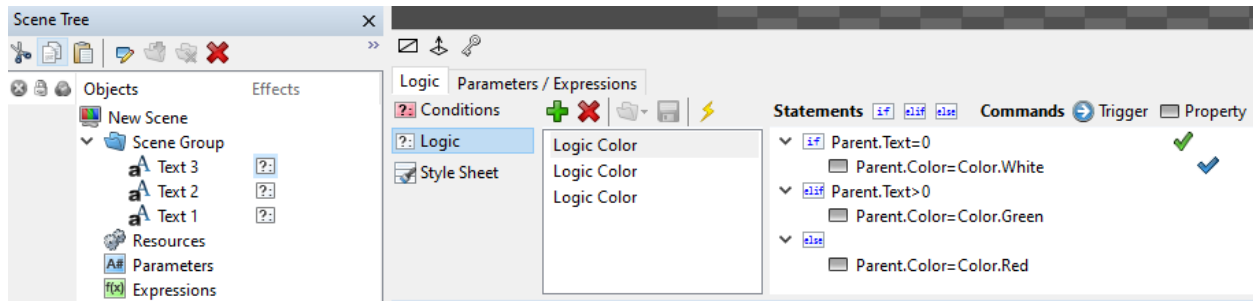

LUA

LUA scripts are scripts that run at a low level inside the render engine on a frame by frame basis unlike VB or C# scripts which run at a high level outside the render engine.

LUA Script code can be written in PRIME by adding a LUA Script Effect. They can be embedded in the scene or saved out as “. GEF Effect Files”. These GEF files can be assigned to the LUA effect. The LUA property editor will show attributes defined in the LUA file; these attributes appear as properties of the LUA effect and can be keyframed on the timeline.

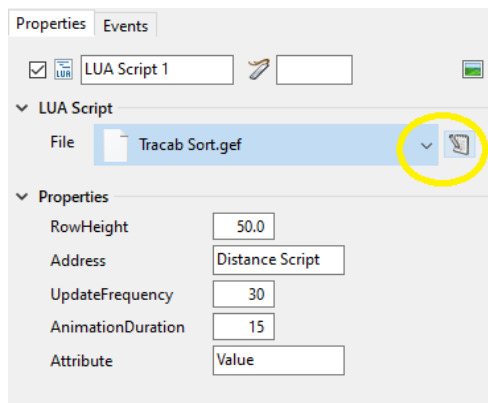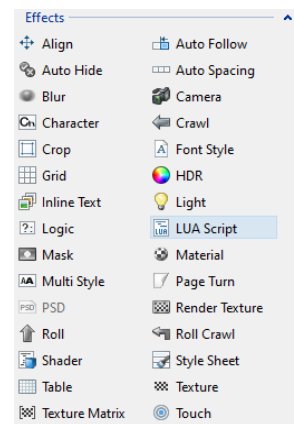

The edit button allows for the script to be edited and then saved

The screenshot displays the Chyron Prime interface with a Lua script editor on the left and a properties panel on the right.

Script Editor:

```

Execute Halt
Address = Scene.get("Address")
Attribute = Scene.get("Attribute")
function compareText(a, b)
    return Scene.get(Scene.find(a, Address), Attribute) < Scene.get(Scene.find(b, Address), Attribute)
end
Events.onEveryFrame = function()
    UpdateFrequency = Scene.get(Scene.this(), "UpdateFrequency")
    if Scene.getTime() % UpdateFrequency == 0 then
        return
    end
    list = {}
    node = Scene.firstChild(Scene.node())
    while node do
        child = Scene.find(node, Address)
        if child then

```

Properties Panel:

Declarations:


Name	Type	Default Value
RowHeight	Double	50
Address	String	
UpdateFrequ...	Int32	30
AnimationD...	Int32	15
Attribute	String	Text

Properties:

- RowHeight: 50.0
- Address: Distance Script
- UpdateFrequency: 30
- AnimationDuration: 15
- Attribute: Value

Mask

PRIME allows for two types of Masks: **Layer** or **Group**.

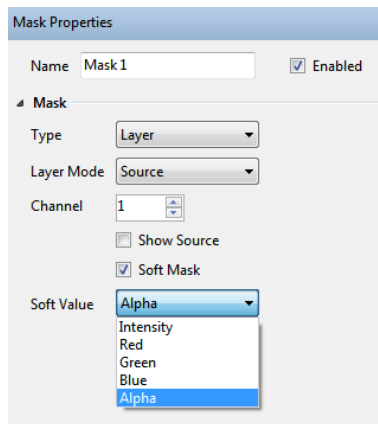

Layer Masks

Consist of “Sources” and “Targets” and can be assigned a “Channel”


“Soft Mask” settings allow you to blend between both the target and the source.

Layer Masks can be Stencil or Soft.


There is a limit of 5 concurrent masks per channel for stencil masking and 127 per channel if soft is enabled.

A single target can only be the masked target of 8 total layers. If more than 8 layers are used on a single target, the first 8 effects with the mask layer effect will still mask. Any layer effects after that will not mask. You can have multiple objects use the same layer

With multiple Hide Targets, any part of the source that is covered by a target will be hidden



With multiple Reveal Targets, ONLY the places where all of the targets intersect will be revealed.

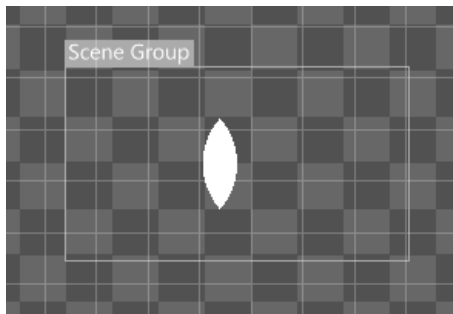


Layer Mask scope:


- Global masks will affect any other Global masks. Scene masks will only affect other
- Scene masks in the same scene (or base scene)

Group Masks

Group masks will mask everything within its parent group and has no notion of “target and source”.

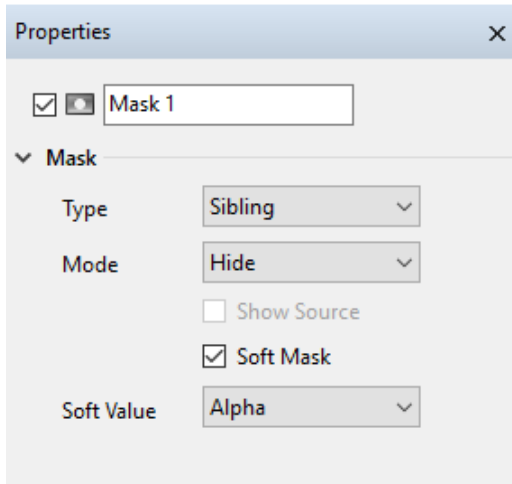

Mode: Hide/Reveal

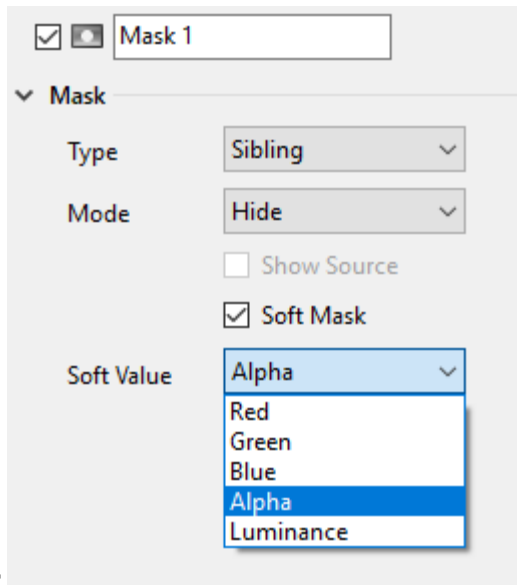

Soft Value:

Material


Materials can be applied to various scene objects. The material effect controls double as an editor that can be used to manipulate the current effects properties. It also has the capability of saving material effects for future use. Saved materials can then be applied later to other scene

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

objects. A preview of the material is supplied to show the user the result of the created material effect.


Faces

Preset



- The file that was saved or is being created. Any saved materials can be chosen from this control


Color



- Diffuse
- Emission
- Ambient
- Environment
- Specular
- Shininess

Diffuse

Diffuse lighting is used to simulate re-emission from a surface where the re-emittance isn't "ordered"(that is, the re-emitted light is diffused).

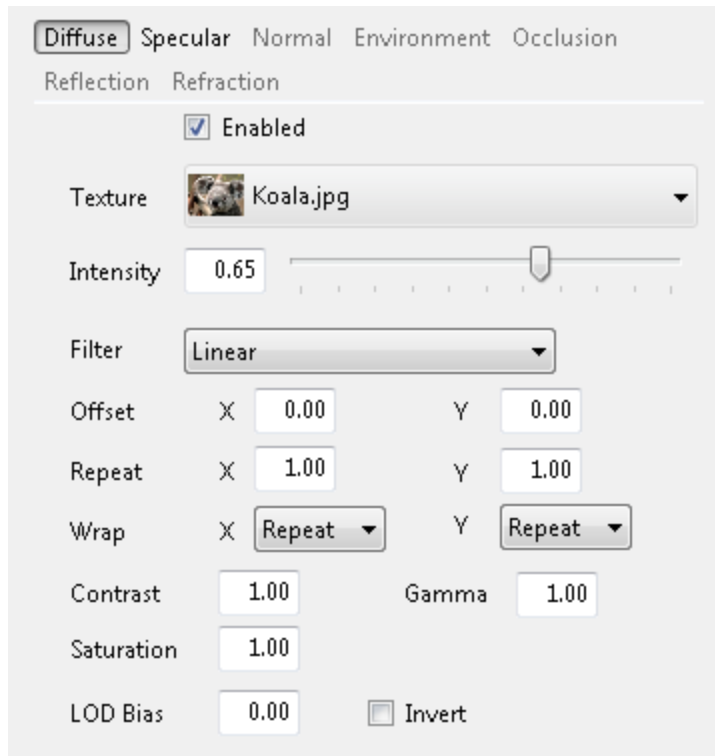

Texture

Intensity

Offset

Repeat

Wrap


Contrast

Gamma

Saturation

LOD Bias**Invert****Specular**

A **specular highlight** is the bright spot of light that appears on shiny objects when illuminated

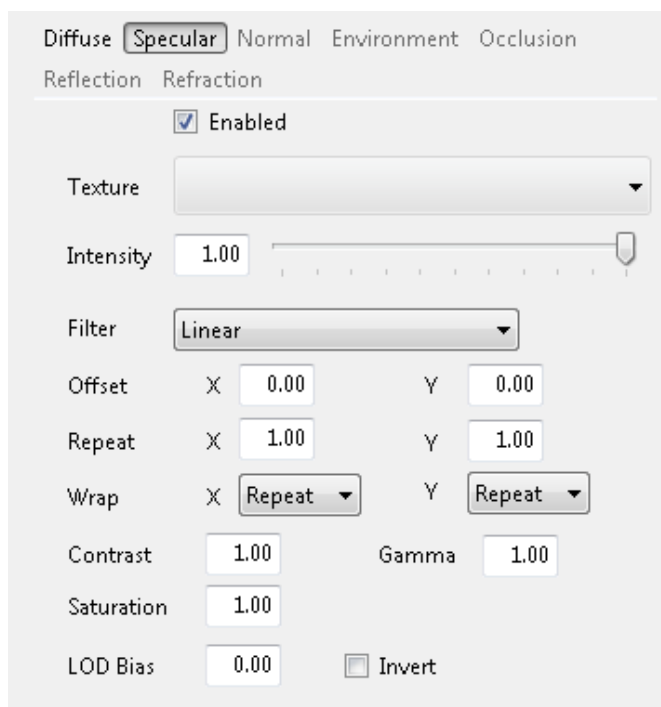**Texture****Intensity****Offset****Repeat****Wrap**

Contrast


Gamma

Saturation

LOD Bias

Invert

Normal

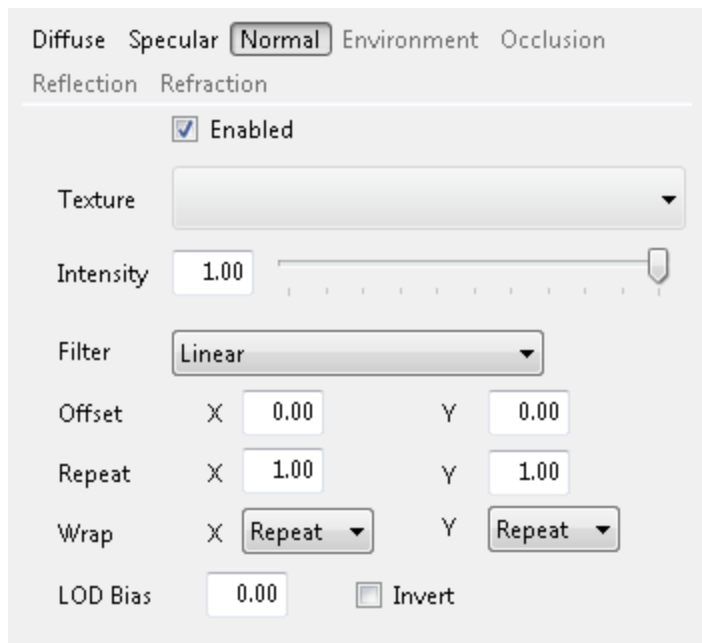

Texture

Intensity

Filter

Offset

Repeat


Wrap

LOD Bias

Invert

Environment

Environment lighting adds light to the scene as if it came from a sphere surrounding the scene. The light is usually colored using an image called an *environment map*. An environment map can match the lighting (and reflections) in a scene to a real-world location, or may simply be used to add interesting variation to the scene's lighting.

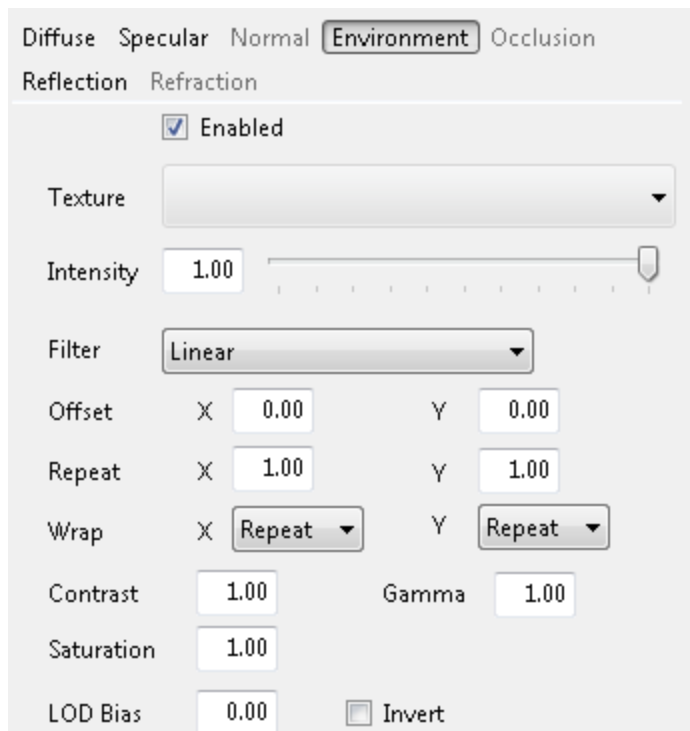

Texture

Intensity

Filter

Offset

Repeat

Wrap

Contrast

Gamma


Saturation

LOD Bias

Invert

Occlusion

Ambient Occlusion is a sophisticated ray-tracing calculation which simulates soft global illumination shadows by faking darkness perceived in corners and at mesh intersections, creases, and cracks, where ambient light is occluded, or blocked.

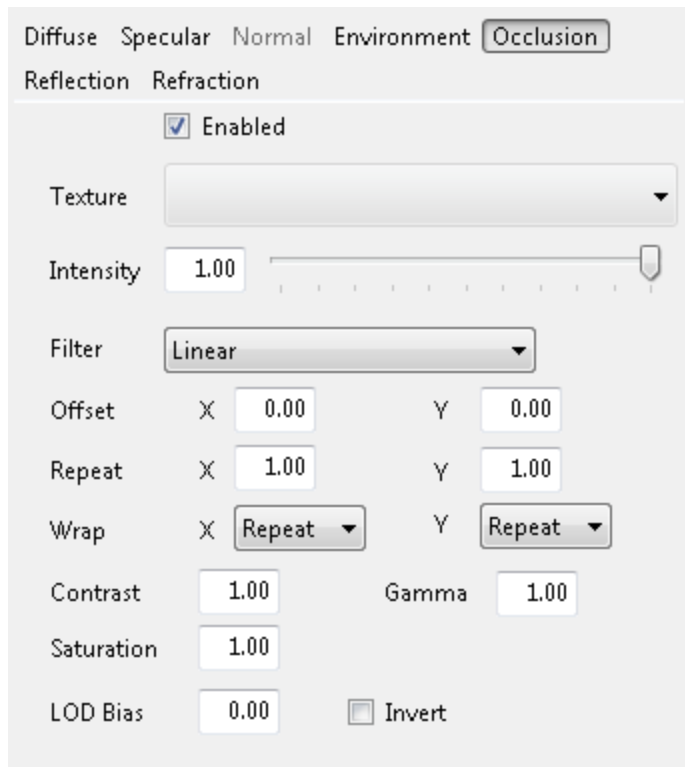

Texture

Intensity

Filter

Offset

Repeat

Wrap

Gamma


Contrast

Saturation

LOD Bias

Invert

Reflection

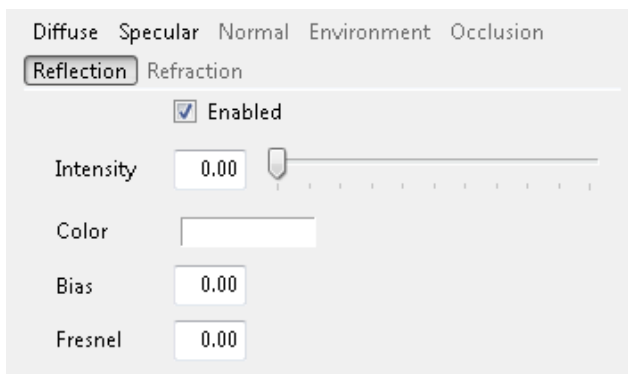


Intensity

Color

Bias

Fresnel

Refraction

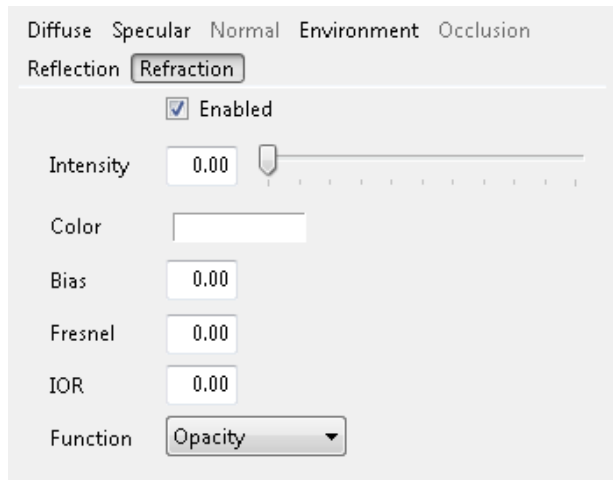

Intensity

Color

Bias

IOR

Function


Multi Style

The Multi Style effect is a user-friendly way to allow a single text box to display two separate styles. The Multi Style effect is predicated on having existing Styles available to your scene already. Refer to the “Effects->Style” section.


In the first screen shot I have a simple scene with a single Text object, one “Style effect” placed on the Scene object, and one “Multi Style” effect placed on the Text object itself.

The second screen shot is the “Style Effect”. See the “Style Effect” section in this guide.

The first text will use the style defined by the Text object itself and the second piece of text will use the style defined by the “Style Effect” placed on the scene object. As a note the “Style Effect” could have easily been placed on the text object as well.

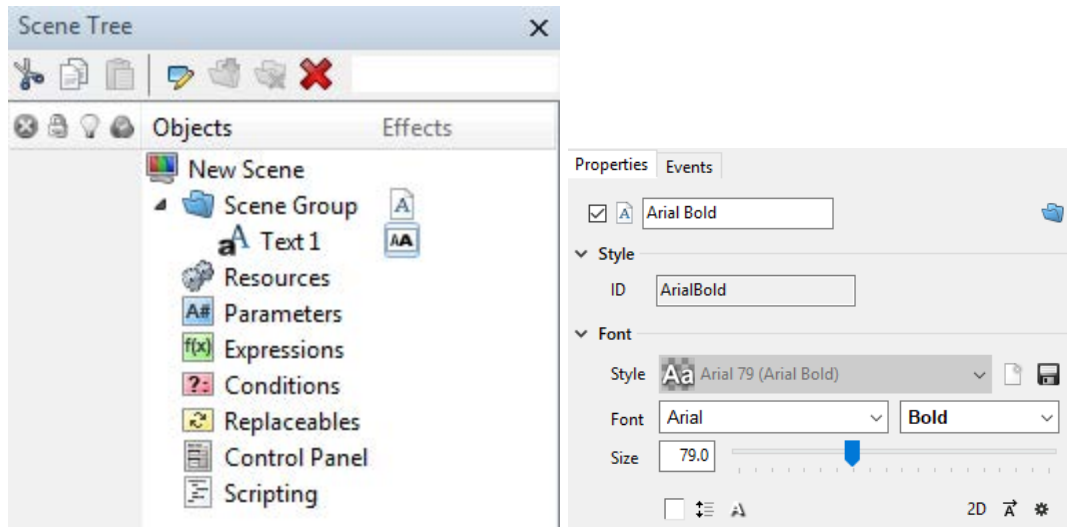


Select the Multi Style effect to show its Property Page.

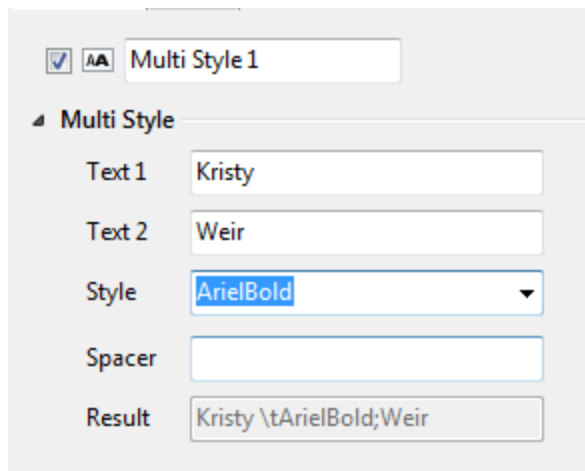


Now select the style you wish to use and enter the text for each to get the desired result.

The Styles available to the Multi Style effect will enumerate in each of the “Style” drop down combo boxes.

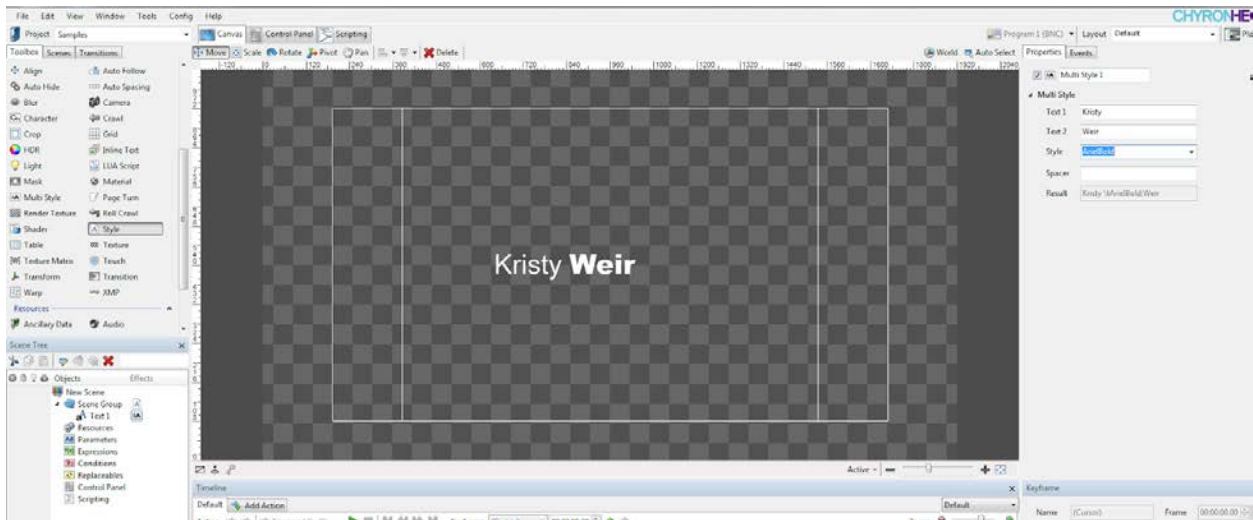


The Multi Style Text objects function the same way as a single Text object. Each can be bound to any data source like the Data Object or XMP or as a replaceable for automation or Replaceables in LUCI.

You can drag and drop each into the Replaceables for instance. Drag the Text 1 label from the Multi Select effect into the Replaceables window to expose this object to Automation.

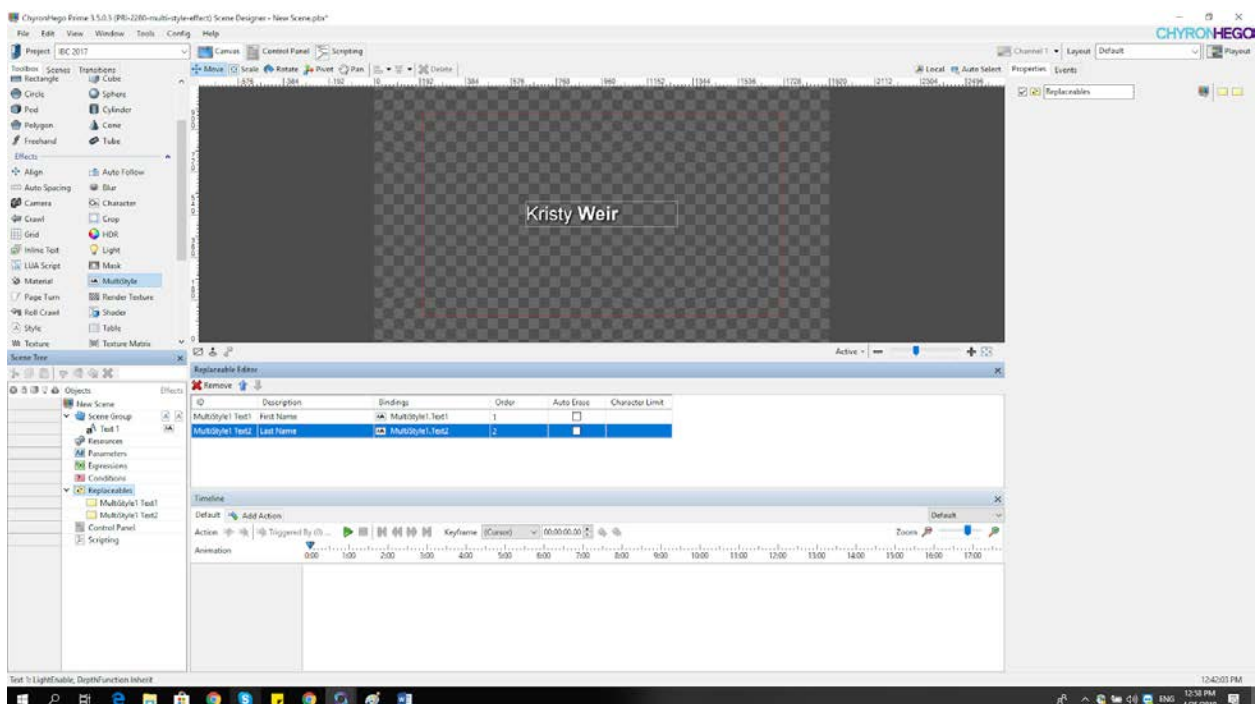

Binding with XMP:

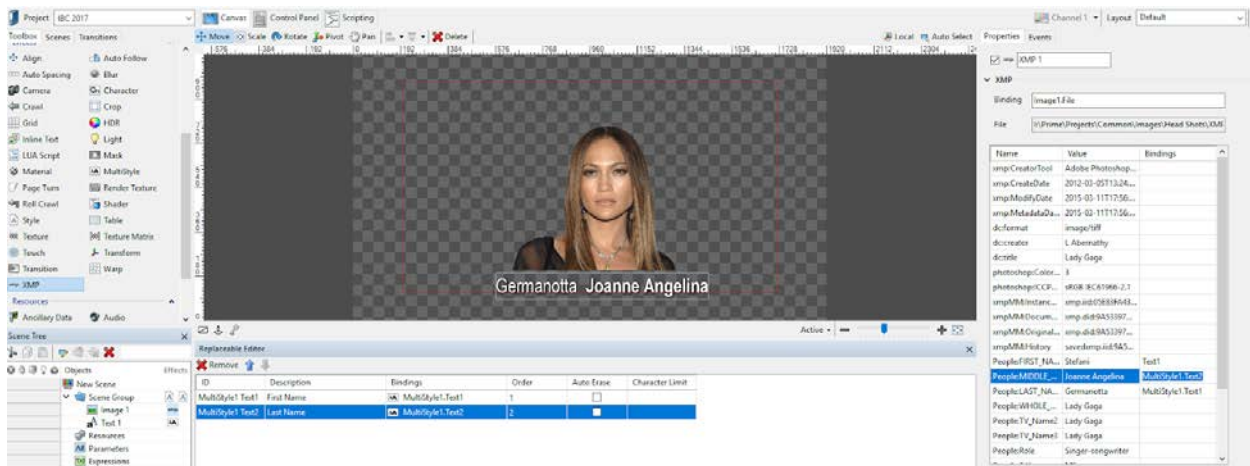

Binding with the Data Object

Source

XML ← Back

File: I:\Prime\Projects\Common\Data\XML_Examples\WorldCup_Soccer\WC_Rost

Table:

- message
- message/category
- message/heading
- message/sport
- message/Team_Roster
- message/Team_Roster/Listing**
- message/Team_Roster/Listing/Caps
- message/Team_Roster/Listing/Club

Filter

Column

Use /

All R

Now

Cust


message

Binding Tree Cell Column Clear All Bindings

Player_ID	First_Name	Last_Name	Jersy_Number
78	Geert	De Vlieger	1
79	Eric	Deflandre	2
80	Glen	De Boeck	3
81	Eric	Van Meir	4
82	Nico	Van Kerckhoven	5
83	Timmy	Simons	6
84	Marc	Wilmots	7
85	Bart	Goor	8
86	Wesley	Sonck	9
87	Johan	Walem	10
88	Gert	Verheyen	11
89	Peter	Van Der Heyden	12
90	Franky	Vandendriessche	13
91	Sven	Vermant	14

Page Turn

The page turn effect can be applied to any object.

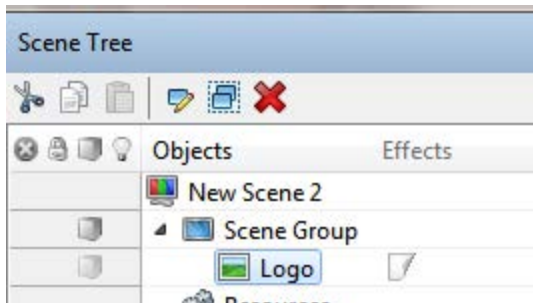

Transform

Position

Surface

Size

Page Turn Properties

Angle

Inner Radius

Diameter of the roll (at the start of the roll)

Outer Radius


Defines how tight the roll is. With a higher value (greater than Inner Radius) there will more space between the layers of the roll.

Tessellation

Number of points per width and/or height.

Factor

Value from 0 to 1 define roll process

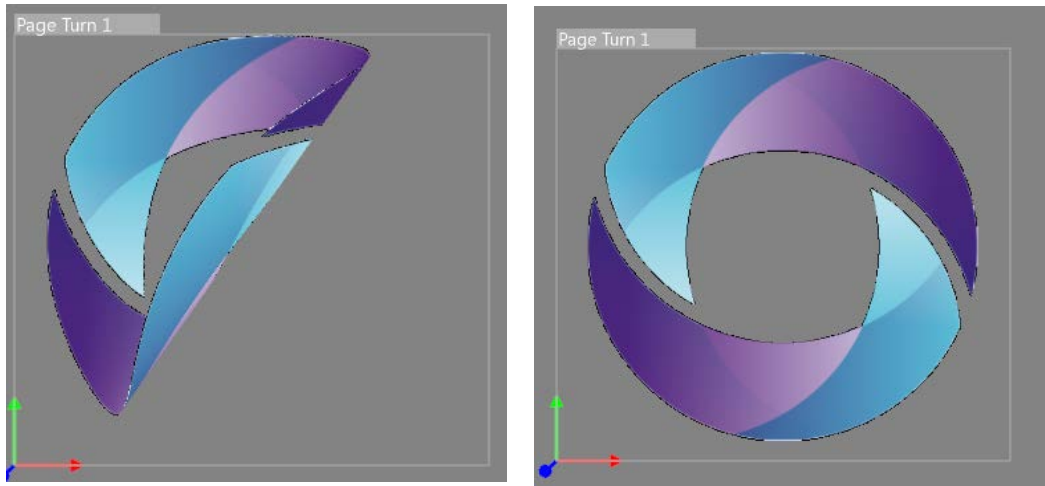

Parameters

Properties

Parameters Effect 1

Table

Bind To Table

Table: Table 1

Row Number: 1

Query: RowNumber = 1

Apply Reset

Apply On Change

Parameters

+ Add - Remove

Name	Type	Value	Bindings
TeamColor	Color	#821010	PrimaryColorLogo.Color...
TeamName	String	Slavia Praha	
TeamLogo	String	bohem.png	Logo.File

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

The parameters effect is intended to be used in parallel with the table resource. Best practice is to apply the parameters effect at the group level, where a group is duplicated. For example if you have a table of statics information and have designed your template with multiple rows that are individually grouped. Apply parameters effect to Row 1 Group, and the copy/paste for additional iterations, Row 2 Group, Row 3 Group ect...

Parameters Properties

- Parameters Effect name: updatable alphanumeric text field
- Table
 - Bind to table: Drop down will display table resource available in scene
 - Row Number: Will display data from selected row number in table
 - Query: Custom Query for selecting data
 - Apply: Select to evaluate query
 - Reset: Column values will rest to default values
 - Apply on change: Enabled by default
- Parameters
 - Toolbar
 - Add & Remove
 - Only available if Bind to table is deselected
 - If Bind to table is selected these controls are grayed out and not active
 - Bindings: Bind any object properties to a parameter

Name	Type	Value	Bindings
TeamColor	Color	#821010	
TeamName	String	Slavia Praha	
TeamLogo	String	bohem.png	Logo.f
BackColor	Color	#FFFFFF	File FileHeight FileWidth
Scored	Integer	63	

*use semicolon between objects if binding to more than one object

Name	Type	Value	Bindings
Points	Integer	32	
BackColor	Color	#377A00	
TeamColor	Color	#005E34	PrimaryColorLogo.Color; Seperator.Color; TopB...
Column 13	String		

Properties

Parameters Effect 1

Table

Bind To Table

Table: Table 1

Row Number: 1

Query: RowNumber = 1

Apply Reset

Apply On Change

Parameters

Name	Type	Value	Bindings
TeamColor	Color	#821010	PrimaryColorLogo.Color...
TeamName	String	Slavia Praha	
TeamLogo	String	bohem.png	Logo.File
BackColor	Color	#FFFFFF	
Scored	Integer	63	
Allowed	Integer	17	

Photoshop Import

Photoshop Import feature for ChyronHego Prime

The PSD effect allows the user to import photoshop files (.psd) into prime. Photoshop layers are imported into PRIME as individual PRIME scene objects. The PSD effect can only be applied to

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

a PRIME “Group” object. All PSD layers are imported into this PRIME “Group” object and can then be treated as native PRIME objects.

Basic usage - Add PSD effect on a group object. Select a psd file in the file box and press the ‘Import button’. Import button acts as if checkboxes ‘Reset Layer Position on Update’ and ‘Clear Group Before Update’ were checked. It imports individual layers from PSD file into PRIME.

Checkboxes:

- Reset Layer Position on Update - resets coordinates of layers on Canvas based on the PSD file.
- Clear Group Before Update - removes all objects from the group with the selected PSD effect.
- Add Crop Effect - adds crop effect to the group.

Update button usage - using the update button will not render images that were previously rendered, thus it can import the psd file quicker - this only works if you're using the same psd file multiple times. The update button will also import any new changes from the psd file.. This can be done using Import button as well, but that will automatically reset the layer coordinates and re-render all layers.

Text drop-down menu usage - if the psd file contains text layers, the drop down menu contains three ways of how to deal with text:

1. Image Only - the text layer will be imported as an image.
2. Text Only - the text layer will be imported as a text object.
3. Text With Disabled Images - the text layer will be imported as a text object and it will also be rendered as an image. The image will be disabled.

When using an option where a text object is created, the basic text information from the PSD file will be transferred to PRIME if found, including: the text value, font name, font weight, font size, font color, kerning, alignment and whether the text is all caps. The positioning of the text can be a little off due to differences between PRIME and Adobe Photoshop.

PSD effect properties

File - Image browser same as in Image Object allows you to either select a file or import it into project images folder.

Currently supported PSD elements:

PSD effect is able to import psd files that use 8 bit depth color mode and Rle image compression.

FOR MORE INFORMATION ABOUT CHYRON VISIT:

[HTTP://CHYRON.COM](http://chyron.com)

PSD effect supports importing layers, masks on layers, groups, masks on groups. Supported attributes are opacity, open/closed folders, visible/invisible layers.

Text supports both basic dropped shadow and outline PSD effects. Image supports only basic dropped shadow PSD effect.

To get the best results, it is recommended to apply effects and clipping masks in Photoshop before importing.

QR Code

The QR code effect allows users to assign QR properties to specific objects like Images.


Overview

QR Code effect allows users to create a QR code from URL or plain text. Once it's created, they can bind it to an image, or a texture of a graphic object.

QR Code properties controls

- **Size:** QR Code size can be adjusted in the Surface section of the property editor.
- **Update** (Button): Updates QR Code manually.
- **URL** (TextBox): Contains a link to the webpage QR Code represents.
- **Error Correction** (ComboBox): QR Code has error correction capability to restore data if the code is dirty or damaged. Four error correction levels are available for users to choose according to the operating environment:

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

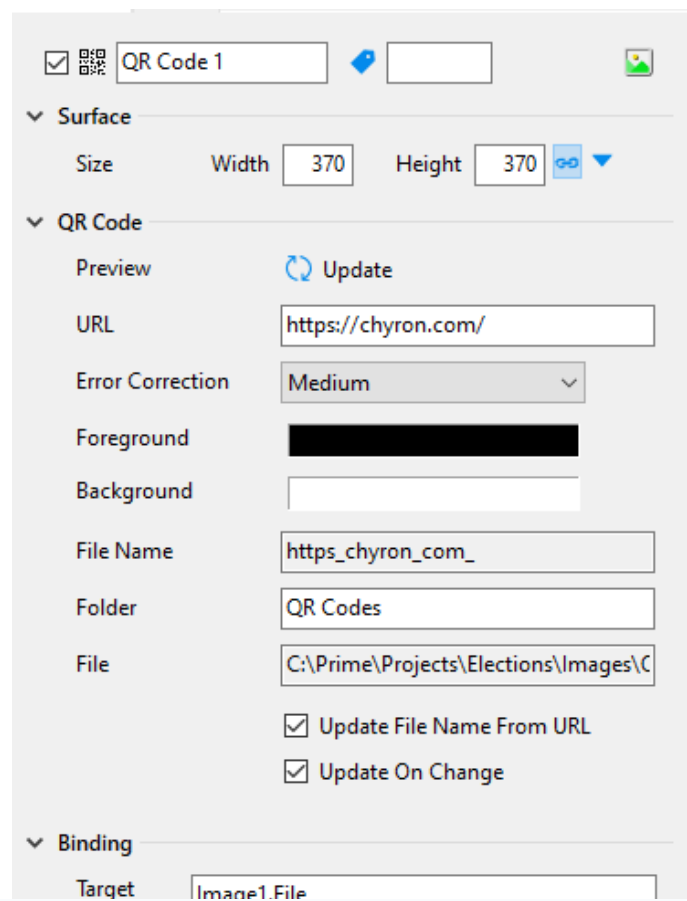


- Low
- Medium
- Quartile
- High

Raising this level improves error correction capability but also increases the amount of data QR Code size.

- **Foreground and Background** (ColorPickers): Colors can be adjusted in classic Prime Color Pickers.
- **File Name** (TextBox): By default generated from URL, but custom name can be used if Update File Name from URL is unchecked.
- **Folder** (TextBox): allows users to change the name of the folder which is stored in the project's Images folder.
- **File** (TextBox): Non Editable, shows a path to the QR Code file.
- **Update File Name from URL** (CheckBox): controls if File Name is generated automatically from URL
- **Update on Change** (CheckBox): Determines if QR Code should be updated on any given property change or if it has to be updated manually by pressing the Update button.


Binding controls

- **Target** (TextBox): contains a path to the property which should be overridden by QR Code.
- **Auto Update Parent Size** (CheckBox): Controls if the target object's size should be inherited from QR Code.
- **Reload on update** (CheckBox): Determines if target object should be reloaded when QR Code is updated.

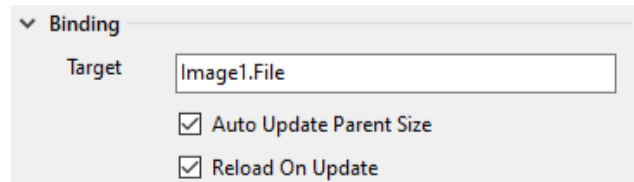

All QR code effect properties are specific to industry standard QR codes.

Render to Texture

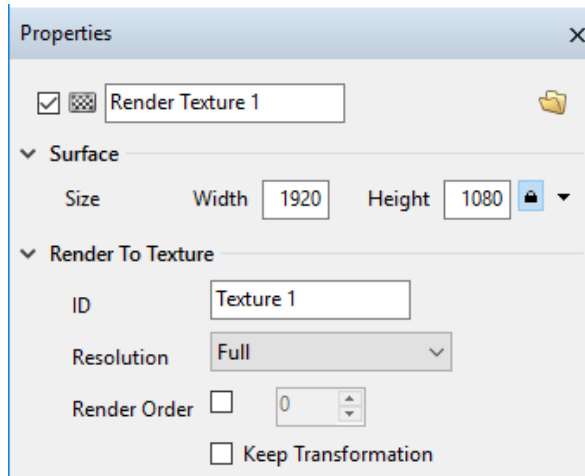

ID- User friendly name to refer to this group. This Id will show up in the images browser as well. (The texture is also accessible under file name `--render: ID --` or `--render: channel / ID --`)

Resolution-Texture resolution. Can be used to render smaller texture when full size would be too large.

Having smaller texture can have positive effect on performance.

The resolution of one RTT name should be consistent among all RTT effects in the scene.

- **Full** - Texture resolution and antialiasing is the same as used in the main frame buffer.
- **Half** - Texture resolution is 1/2 of both width and height of the main frame buffer resolution.
- **Quarter** - Texture resolution is 1/4 of both width and height of the main frame buffer resolution.
Antialiasing is disabled.

Render Order- Render order of this texture among other RTTs.

Lower number is rendered first.

When undefined then the implicit order is given by depth of this effect in the scene.

Do not mix explicit ordering with implicit ones at the ordering relationship is not obvious.

Keep Transformation- By default (**Off**) the transformation applied from scene root to this object is reset.

It mimics the rendering to empty frame buffer.

Set to **On** to keep position/rotation/scale transformations applied to all parent nodes.


The “Render to texture” effect is a special effect that can be applied as a surface to objects.


Typically, you will apply a “Render to Texture” to a group of objects. Once a “Render to Texture” effect is applied to a group the group is no longer part of the scene tree although it appears to be. This “Render to Texture” group will then be available in the “Images” folder and be used as a Material on another object.


In this scene tree example, the “Render to texture” effect is applied to Group 1.

The cube has a “Material” effect applied to it. The Material effect is the “Render to texture” and is named “Texture 1 and appears in the image browser.


Note: The Group Name of the render to texture Group will be italicized to indicate this group is a special “Render to Texture” group.

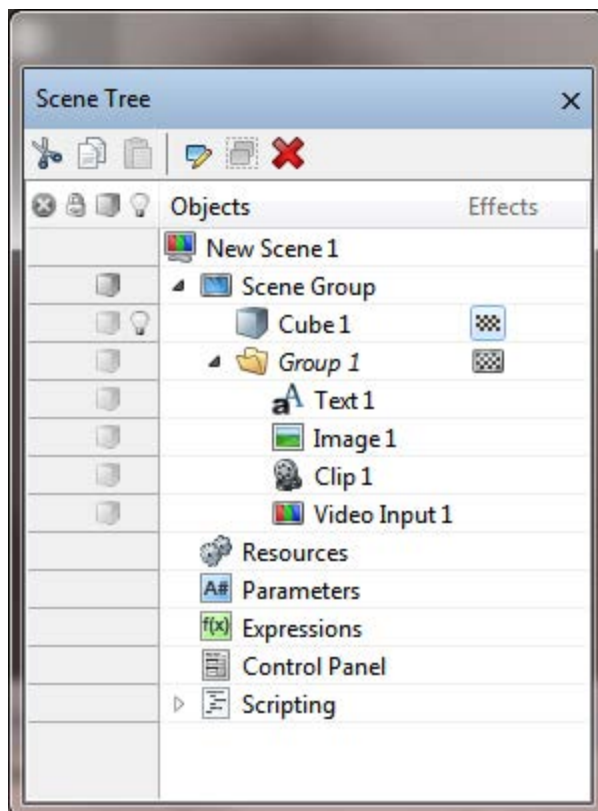

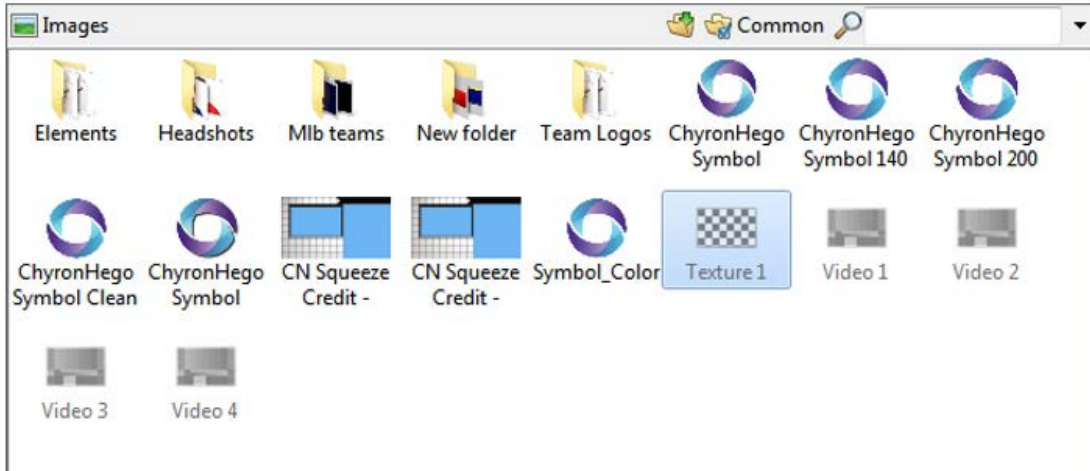

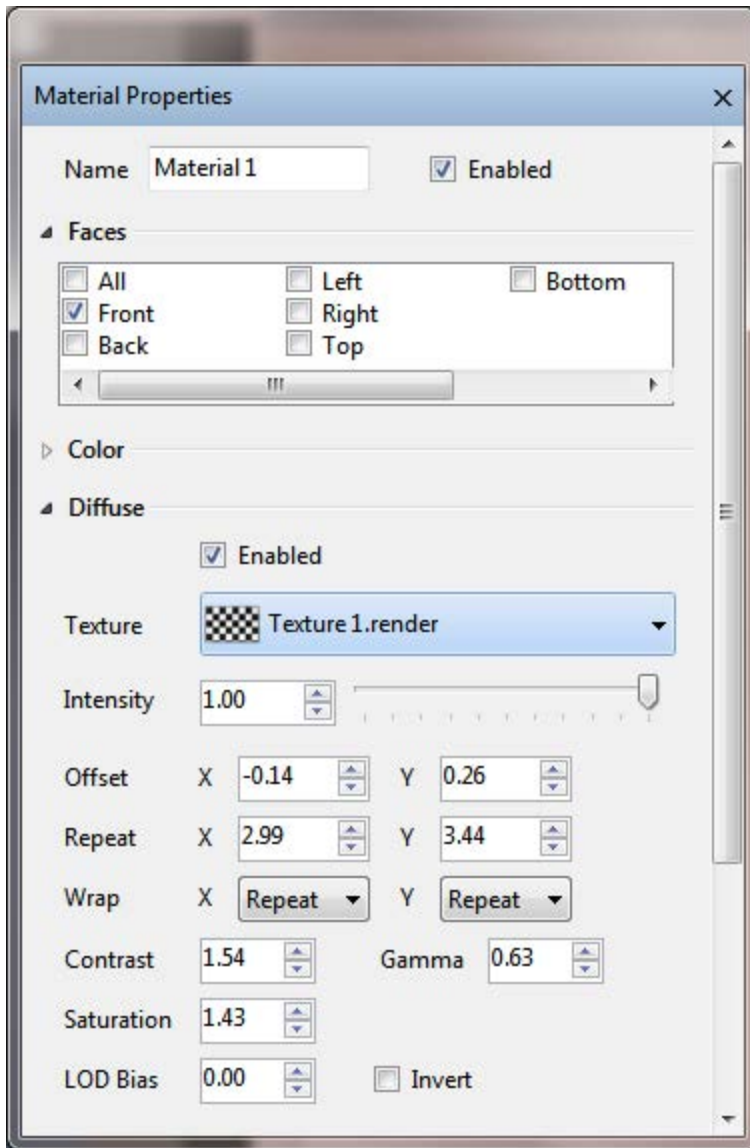

Example output:

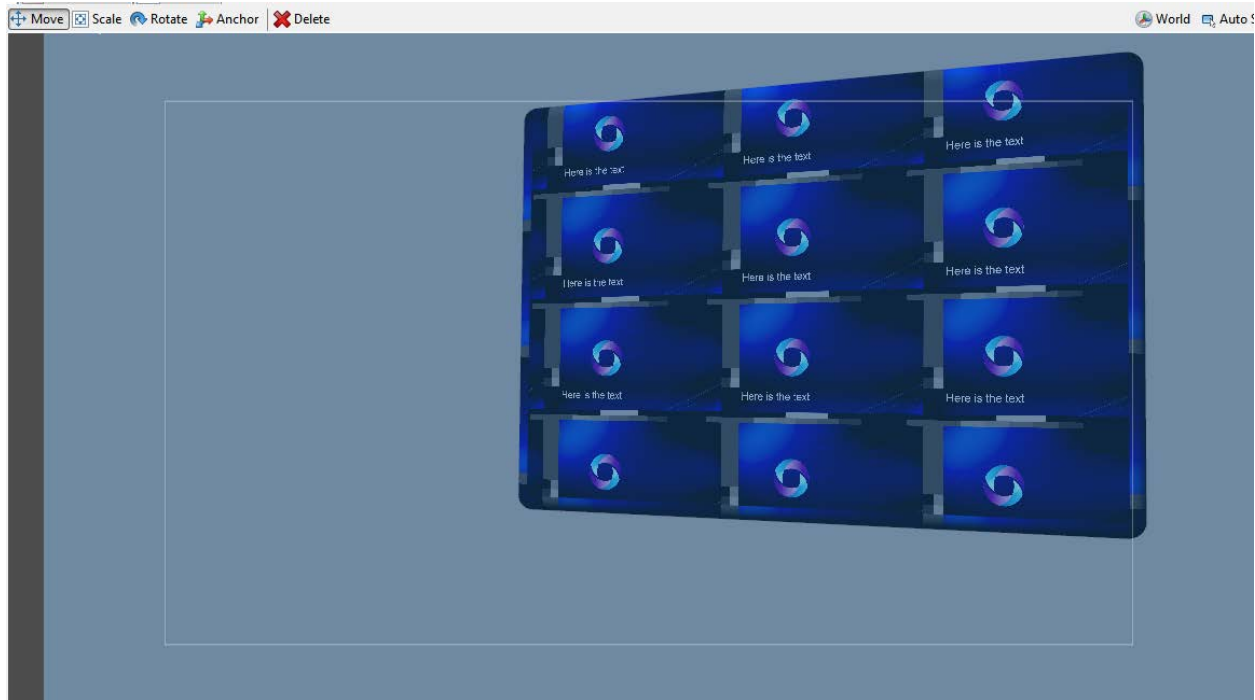


Roll

Refer to the “Crawl Effect”. A Roll is a vertical crawl. [Crawl_Effect](#)

Roll Crawl

The Roll Crawl effect animates an object using both the Roll and Crawl effect combined. The Roll effect is animated first followed by the crawl effect.

Ex: Text can roll up from off screen to its set position and then begin to crawl.

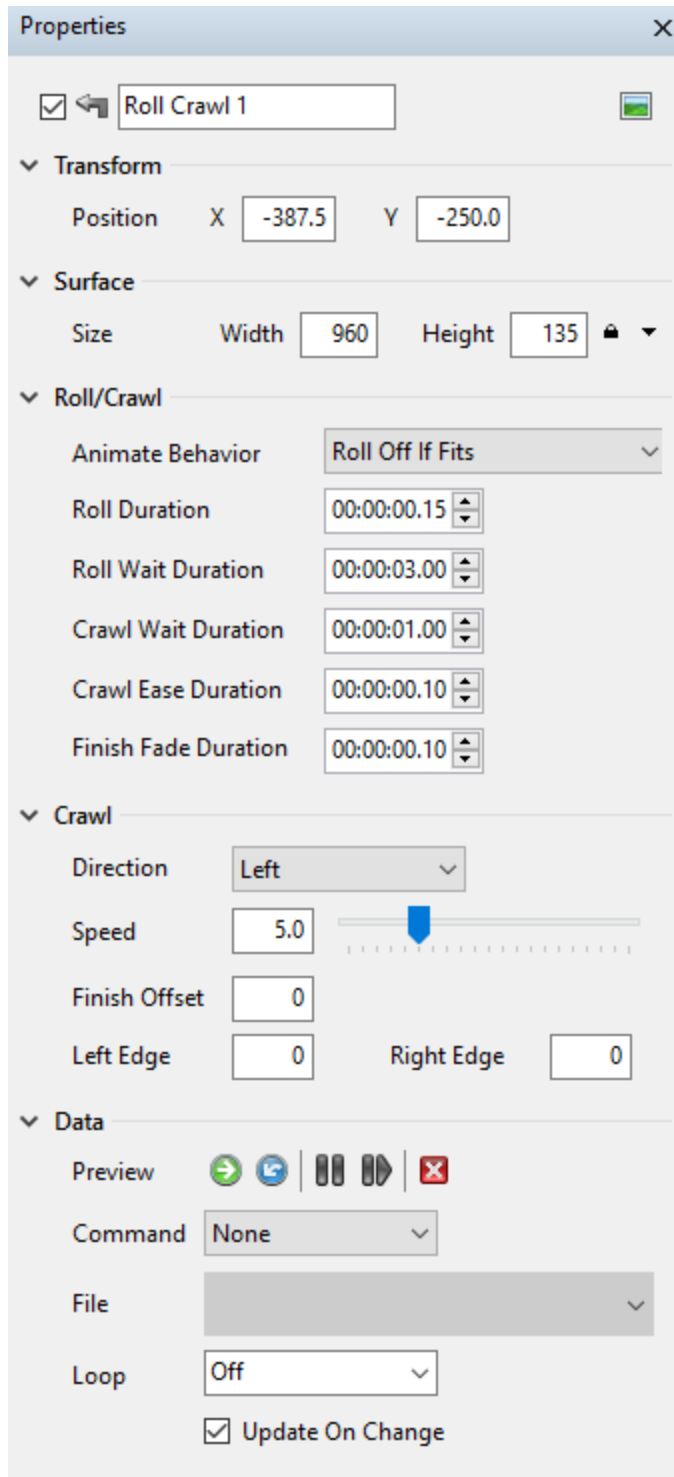

- **Animate behavior** –
 - **Always Crawl off**-The crawl effect will always execute
 - **Roll Off if it Fits**: Only execute the crawl effect if the text does not fit into the bounding box otherwise roll off
- **Roll Duration** – The duration speed on to off and off to on
- **Roll Wait Duration** – If the off effect is a roll (Roll off only if it fits mode) Wait time before next roll off begins. The Time the object is static on air.
- **Crawl Wait Duration** – – If the off effect is a crawl (Based on animation behavior) Wait time before next crawl off begins. The Time the object is static on air
- **Crawl Ease Duration**- Ease in crawl duration
- **Finish Fade Duration** –If the finish offset is greater than zero the crawl will fade offset number of pixels from the bounding box edge.

(For other property definitions see the “Crawl” effect section)


Scale to fit options

Text Uniform Scale

With the introduction of uniform scale we changed the word wrap options on Text Object's property control and extended it with the option to uniformly scale in both horizontal and vertical directions.


Text Uniform Scale Properties Control

- **Off** - select this option to turn off any text word wrapping or scaling based on text bounding box size
- **Word Wrap** - breaks text line into two if it is wider than text bounding box
- **Uniform Scale** - when this option is selected text is scaled horizontally and vertically to fit into text bounds
 - It also sets vertical alignment to Top if it was set to First
 - Turns off Horizontal and Vertical Scale options if turned on




Example

Text before Uniform Scale is applied

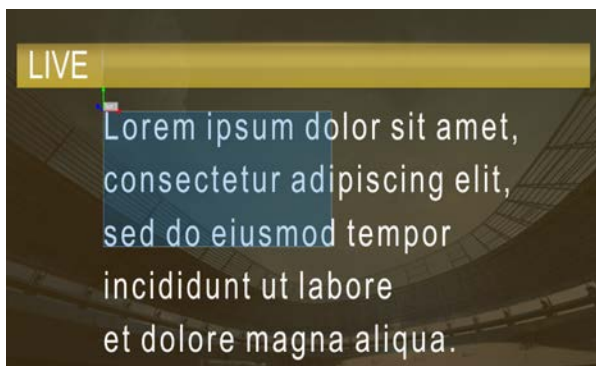

Text after Uniform Scale is applied

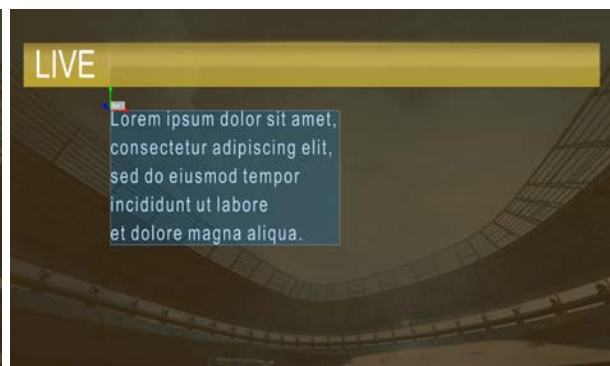


Auto Scale

Auto scale effect is a tool that works together with adjacent text objects and allows a scene graphic with auto scale effect applied to target one of the texts and position and scale itself accordingly. This is especially useful when designing bullet graphics.


Auto Scale Properties Control

- **Target** - dropdown that enables users to select from sibling text objects list (text objects in same group as an object auto scale is applied to) and specify target that an object will position and scale according to
 - By default target is first sibling text if it exists
- **Offset** - offsets position of auto scaled object from its target
 - Defaults to [-25,-25]
- **Scale X Offset** - if enabled it scales down the Offset X value
 - True by default
- **Scale Y Offset** - if enabled it scales down the Offset Y value
 - True by default
- **Scale Parent** - if unchecked an object with auto scale applied will no longer scale itself according to target
 - Defaults to true

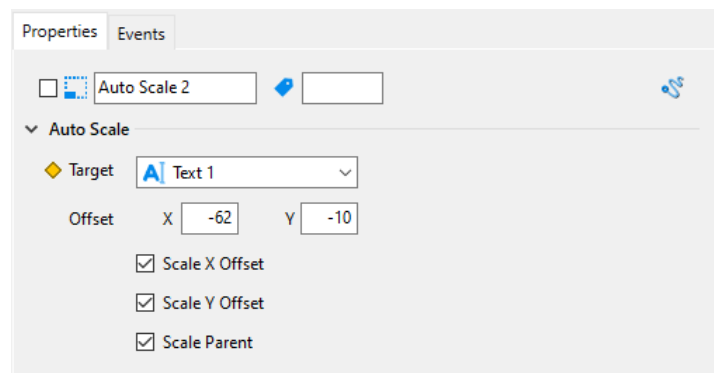


Example

A scene with Text 1 and Bullet 1 objects and no Auto Scale applied

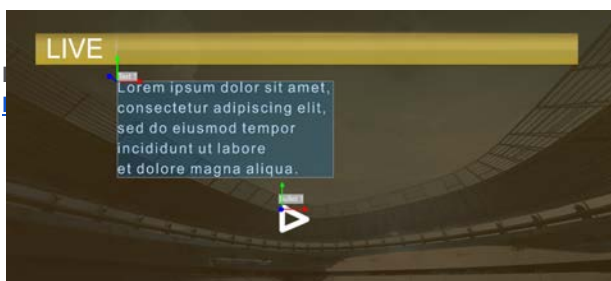

A scene with Text 1 and Bullet 1 objects where Bullet 1 has Auto Scale

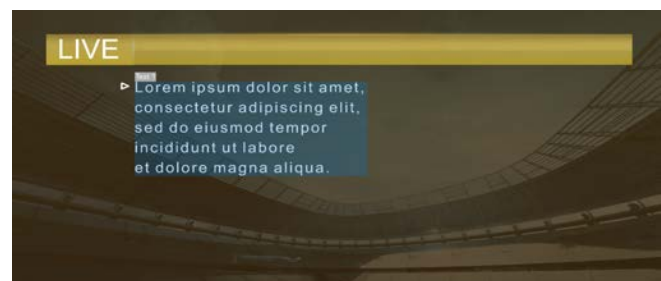


Multi Scale

Multi Scale effect was added as an extension tool for Uniform Scale effect and can be applied to group objects. If a group object contains text objects and Multi Scale effect is applied then all text objects in that group have Uniform Scale automatically enabled.

Multi Scale Properties Control

- **Horizontal** - controls horizontal alignment for the whole text group
 - Defaults to Left with other options Center and Right
- **Vertical** - controls vertical alignment for the whole text group
 - Defaults to Top with other options Middle and Bottom
- **Direction** - allows to specify order of text objects in the group
 - Options Down and Up
- **Font Size** - sets Font Size for all text objects in group
- **Leading** - sets Leading on all text objects
 - Default value is 0
- **Threshold** - higher the threshold is set more performance is gained but multi scale loses its precision
 - Text objects are scaled most precisely at value 0
 - Defaults to 1
- **Spacing** - this property adds spacing between each text object in group

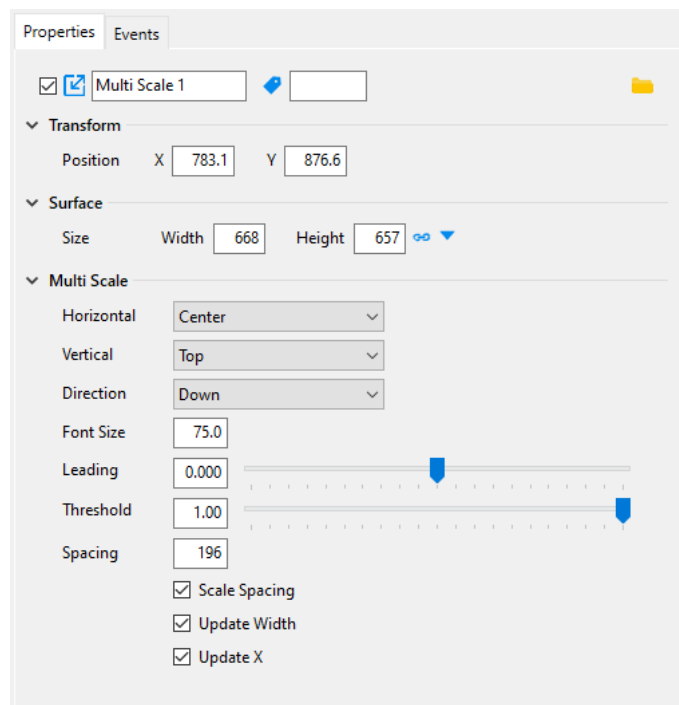

- Defaults to 50
- **Scale Spacing** - if enabled it scales down the Spacing value
 - Defaults to true
- **Update Width** - if enabled it makes sure text objects in group are scaled horizontally according to the width of multi scale effect size
 - Defaults to true
- **Update X** - if enabled text objects are repositioned according to multi scale effect x position changes
 - Defaults to true

Example

Group with 3 text objects without Multi Scale applied



Group after Multi Scale was applied, this example illustrates bigger spacing between text objects and horizontal alignment set to Center




Auto Size

Auto size effect automatically calculates the size and sizes its parent object based on other sibling objects in the parent group. This effect was designed to work in conjunction with other Scale to Fit Options.

Auto Size Properties Control


- **Padding** - this value controls the amount that is added to calculated size
 - Defaults to [0,0]
- **Update Width** - if enabled it automatically adjusts the width of auto size parent object according to newly calculated extent of sibling objects
 - Defaults true
- **Update Height** - if enabled it adjusts height of auto size parent object according to group extent

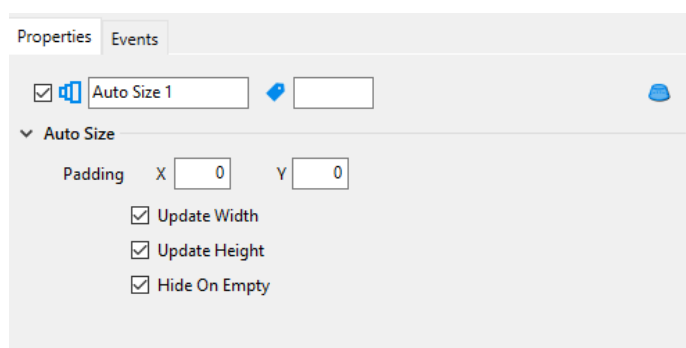


- **Hide On Empty** - hides auto sized object if there is no content inside parent group
 - This can happen e.g. when all objects in group are disabled or there are empty text objects
 - Defaults to true

Example

Multi Scaled group of text objects and Pod object
without Auto Size applied

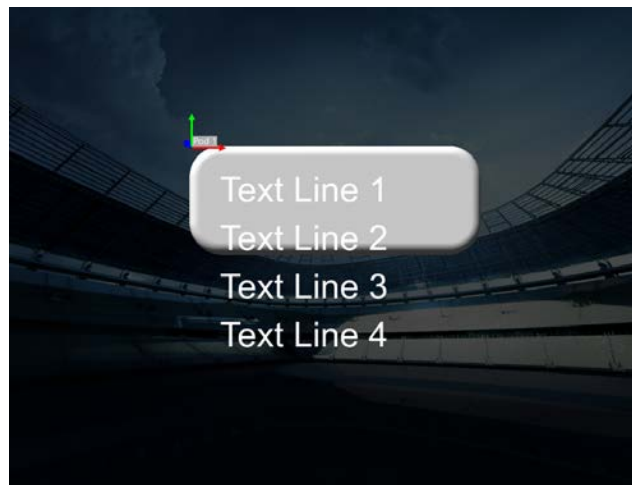



Multi Scaled group of text objects and Pod object
that has Auto Size effect applied

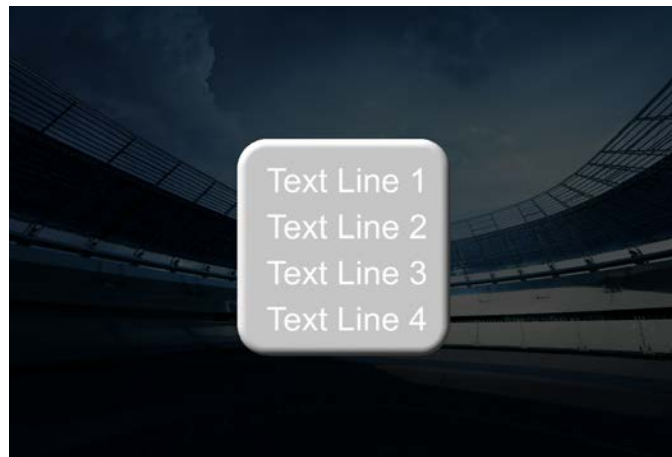

Shader

Shader effects can be added to PRIME objects. They can be loaded and saved out as “. GEF Effect Files”.

The property editor will show properties defined in the Shader file. All Shader properties are keyframeable.

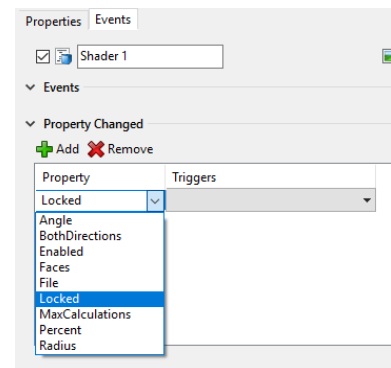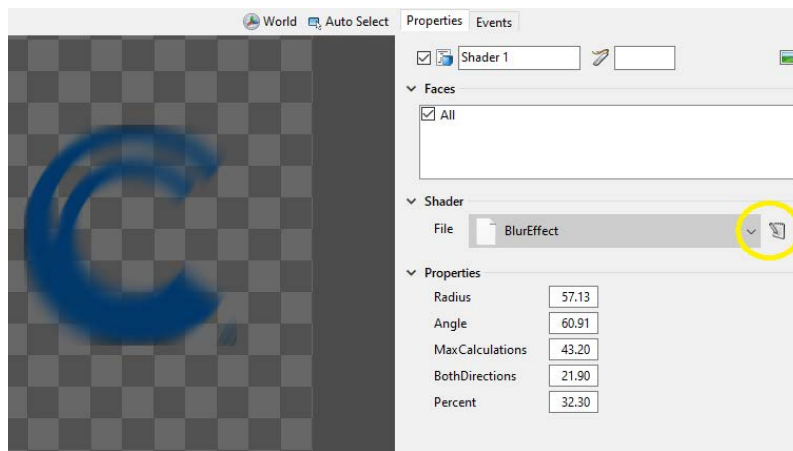


Property Changed Events will be included.

Style

The Style effect allows multiple styles to be used within a single text object. The Style effect can only be applied to a group, including the scene group or any individual text object. You can apply as many Style effects to each.


In this example, the style tag will apply to all 4 text objects

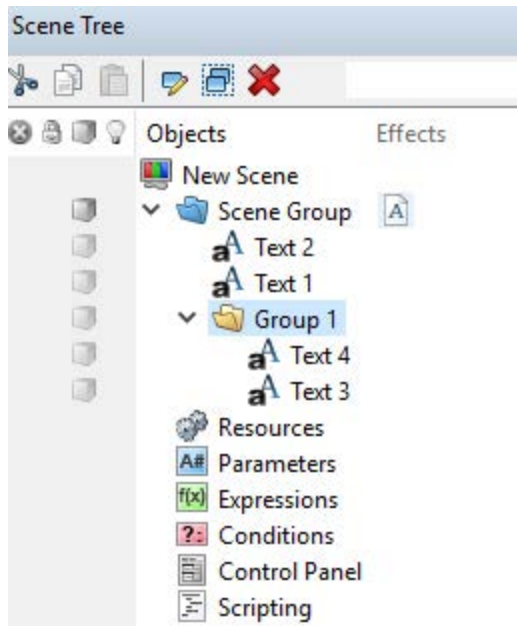

In this example the style tag applies ONLY to the Text 1 text object.



Style properties:

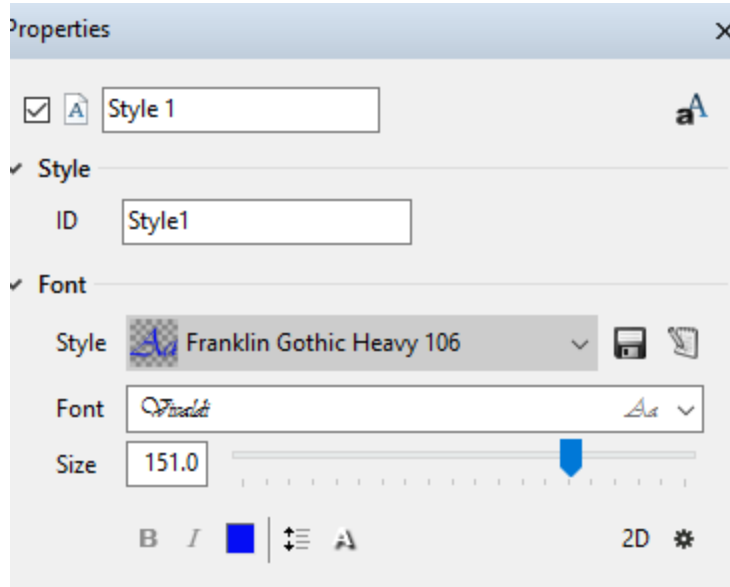

Id: This is the name to be used in the text string that will change the inline Style

Example: `Text\tStyle 1;Text\t;Text`

Results in the following



Font:

Style: This list enumerates all of the Styles available for this project. These are user created style. See the **Text Style Browser** section of the “Text Object”. The Style can be edited and save here.

Style Tag Format

Backslash “t” starts the style tag notation followed by the Style Name ending with a semi-colon:

\tStyle1;


To revert the style back to the default style of the Text object leave the name blank;

\t;


Style Sheets

Style Sheet effects are a collection conditional and property statements which are applied to a parent object, in most cases this will be a parent group. When a Style Sheet is evaluated the conditional statements are applied to the parent object and each of its children. Only graphic objects and effects can be evaluated in a Style Sheet. Style Sheets run on when a scene object is updated.

Style Sheet Properties Controls

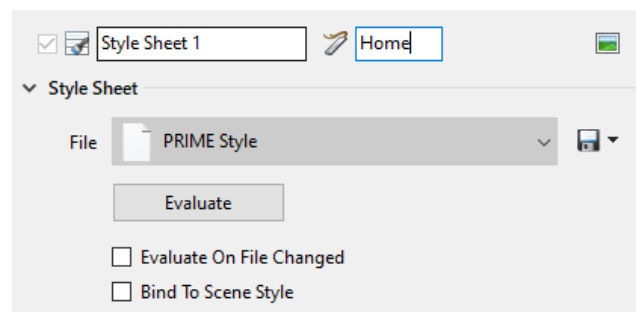


- **File:** Shows the last loaded or saved Style Sheet file (.pse file)
 - **Asset Browser Control:** load Style Sheet files into the existing Style Sheet effect.
- **Save (Button):** Saves a Style Sheet to existing or new file. By default, Style Sheets will be saved to the **Styles** folder in the project directory. The dropdown consists of the following options:
 - Save
 - Save As
 - Reload From Disk: Remove changes and reloads the file.
- **Evaluate:** Evaluates Style Sheet on the active Scene



- o Same functionality as the Evaluate button in the Logic window
- **Evaluate On File Changed:** Automatically applies the Style Sheet to the scene when the .pse file is changed
 - o This will evaluate the Style Sheet after the scene is loaded during playback.
- **Bind to Scene Style :** Binds the Style Sheet File property to scene’s Style property
 - o The binding is internal and is not shown in the scene’s **Style Changed Event**.
 - o If the scene’s **Style** property is changed, the **Style Sheet** will load the .pse file with the same name as scene **Style** property value.
 - o See **Style** and **Style Changed Event** for more.

In the example below, a morning news broadcast uses the scene Style “Morning”. Because **Bind To Scene Style** is checked, the Style Sheet automatically loads “Morning.pse”. With **Evaluate On File Changed** checked, “Morning.pse” will be automatically evaluated.

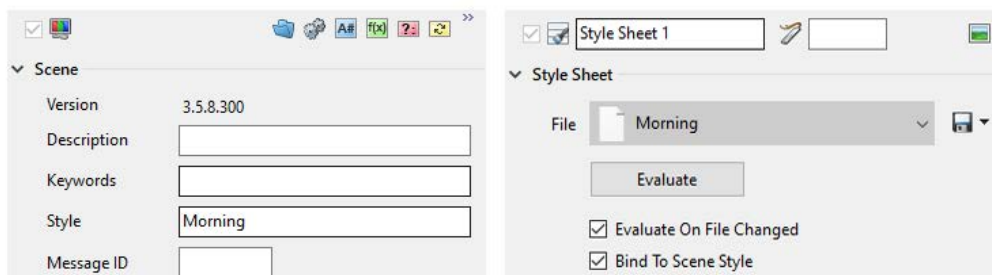


Note: **Evaluate On File Changed** and **Bind To Scene Style** are saved to the **Style Sheet** object and not to the .pse file. For instance, if “Morning.pse” was saved with **Bind To Scene Style** checked and “Morning.pse” were to be loaded with **Bind To Scene Style** unchecked, **Bind To Scene Style** would remain unchecked.

Style Sheet Parameters

Parameters are variables that can be used to store Style information like Color, string, Int, etc. Parameters can be accessed in conditional and property statements.

Notice the “ShowTag” parameter is being accessed in the property statement below.

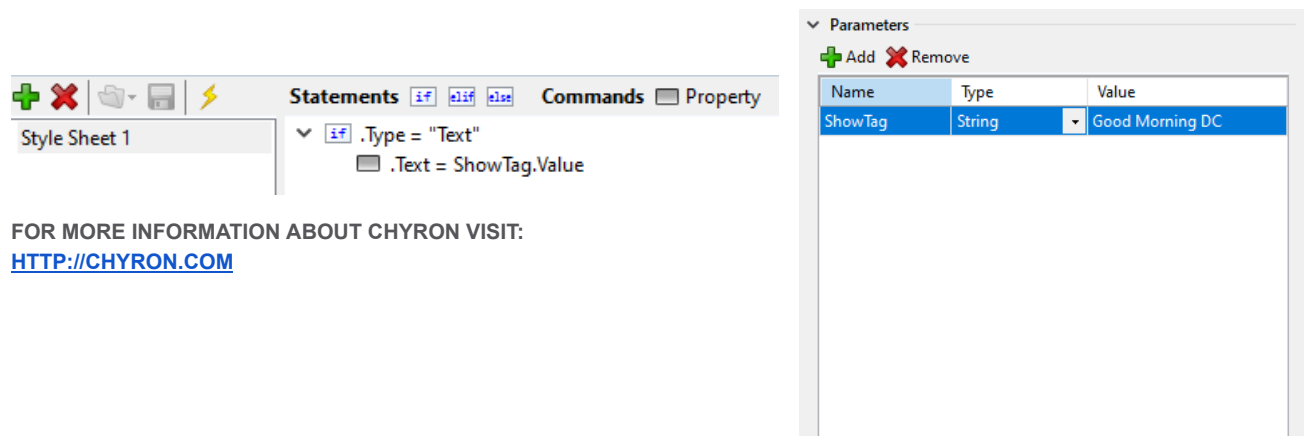


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)


Style Sheet Events

Parameters Change

Add Triggers to listen to Parameter Change Event for particular Style Sheet’s parameter. In this case the Data Object will update when the “ShowTag” value parameter changes.

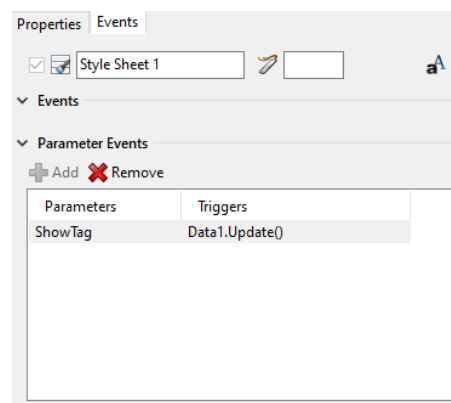


Style Sheet Statement Editor

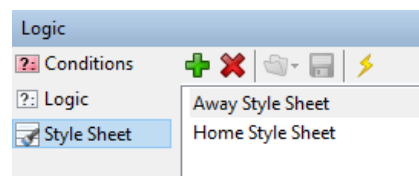


Style Sheets can be edited, added and removed using Logic pane’s Style Sheet tab or in the Effects toolbox.

- The Style Sheet statement editor supports conditional (If Else) as well as property statements
 - o Triggering actions, conditions and other methods are prohibited in Style Sheets


- Style Sheets can be created using With statements:
 - With statements begin with Dot “.” (ex. “.PositionX = 30) and attempt to evaluate if an object shares the matching property, in this case PositionX.
 - With statements are created by dragging keyframable properties from an object’s Properties Pane to Style Sheet Statement Editor.
 - With statements can also be typed but note that AutoComplete is not available in the Style Sheet Statement Editor.
- The **Type** property can be evaluated by the type of object in the statement i.e. .Type = “Text”. These can be constructed by dragging the object from Graphics Toolbox to the Style Sheet Statement Editor.
- The **Name** property allow users to evaluate objects based its name. These can be dragged from the Scene Tree
- The **Tag** property has been introduced to each scene object and can be changed in the Properties tab. Tags serve as an alternative to the **Type** and **Name** properties if users wish identify objects in batches. Multiple objects can share the same tag.

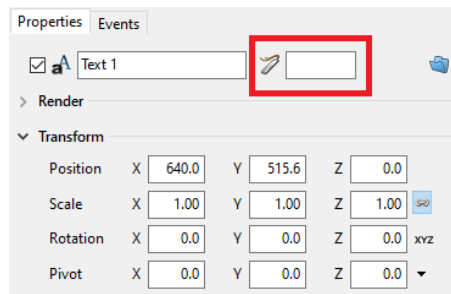

The following example shows a Style Sheet effect applied to a parent object, “GROUP HOME”. When the Style Sheet is evaluated it will evaluate over the parent object and all of its child nodes. The property statements will be applied to the corresponding child objects in the conditional statement.

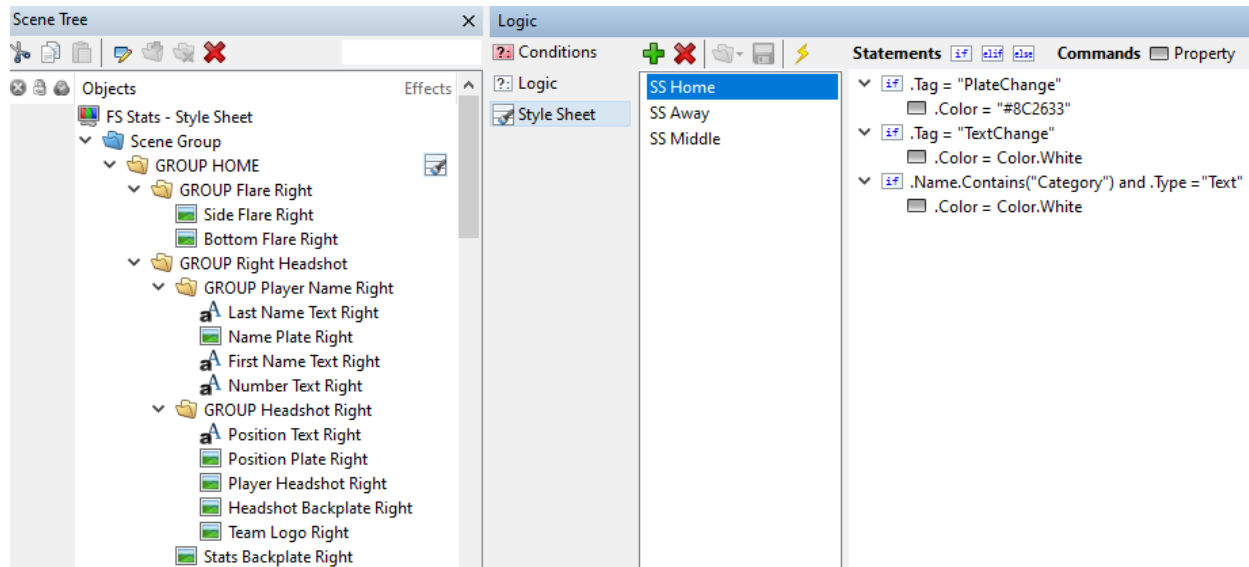

Similar to .Tag using .Parent is another method of applying the same statement to multiple objects. Using .Parent avoids addressing the object by it's name as the statement evaluates against the Parent Object that the Style Sheet is applied to.

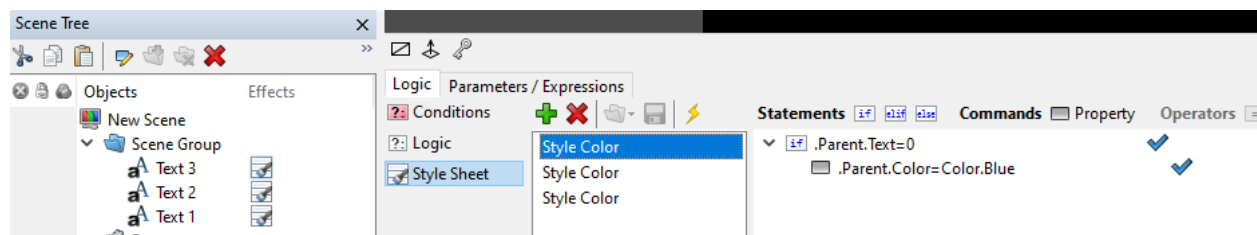


Table

The Table effect can be used to duplicate a graphic multiple times with the purpose of binding multiple rows of a data source to the duplicated graphics.

By default, the duplicated graphics will all appear in the same location. An Auto Spacing effect, or some Lua effect with positioning logic must be placed higher in the scene tree in order to position the duplicated graphics.

Row data is populated in the duplicated graphics by using the navigation commands in the Data object (Move Next, Update). If the number of rows available in the Data object is more than the Row Count property, the additional data can replace the current data in the duplicated graphics by executing a Move Next on the Data object.

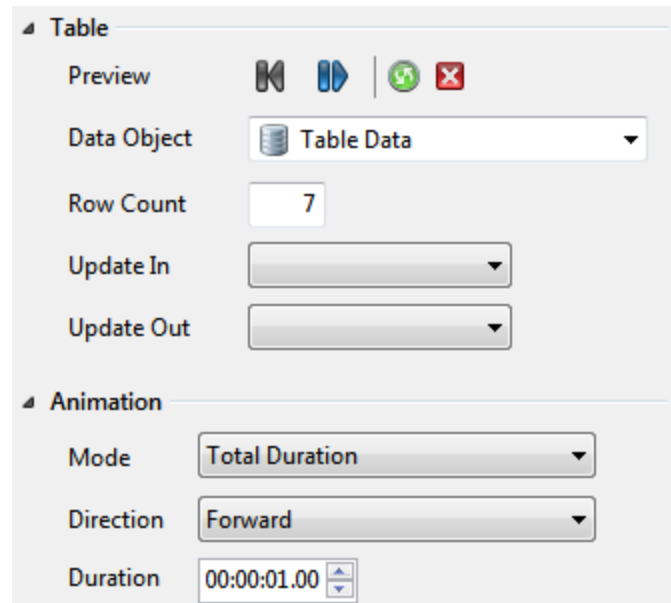

Data Object – a Data object in Columns mode that contains the rows of data to duplicate

Row Count – the maximum number of graphics to duplicate.

Update In / Update Out – animations to play when new data is displayed or hidden

Animation Mode – controls animation stagger when rows are animated

Disabled – no stagger: all rows will animate at the same time

Total Duration – rows stagger animation using the Duration property as the total duration from first to last




Duration Between Rows - rows stagger animation using the Duration property as the duration between individual rows

Direction – the direction of the animation stagger

Duration – the duration of the animation stagger as specified in the Animation Mode property

Table Effect Example

In the example to the right, a Table effect is placed on a Group that contains 3 Text objects and 2 background Images. This Group is then duplicated 7 times as specified by the Row Count property on the Table effect. The duplicated graphics are then spaced out evenly using an Auto Spacing effect. Each individual graphic is populated with its respective row from the Data object as specified in the column binding.

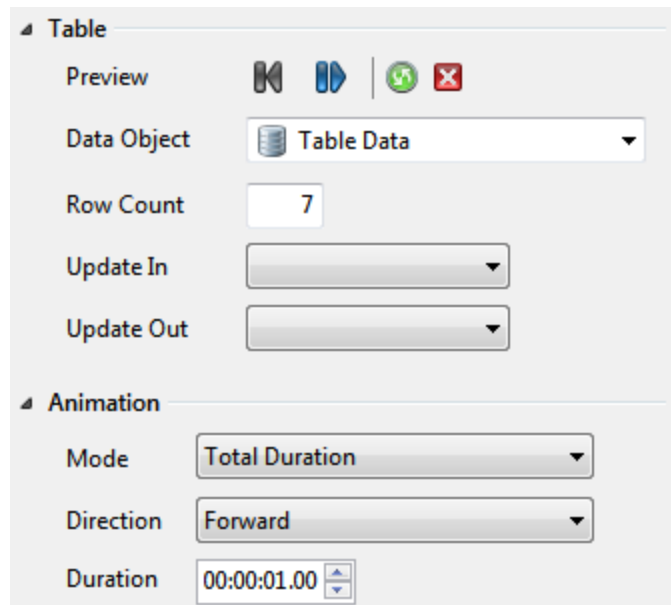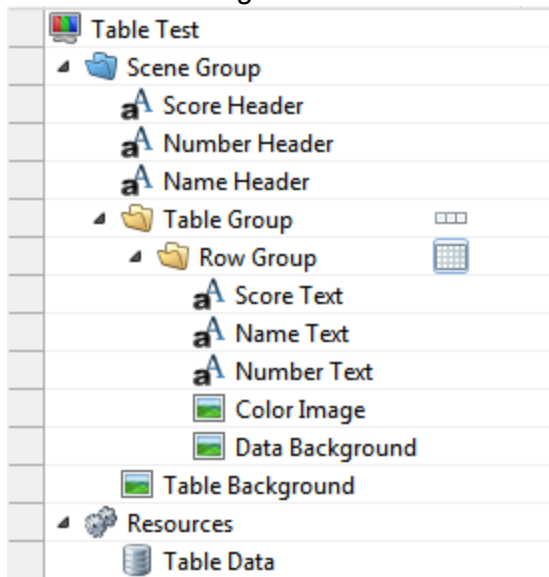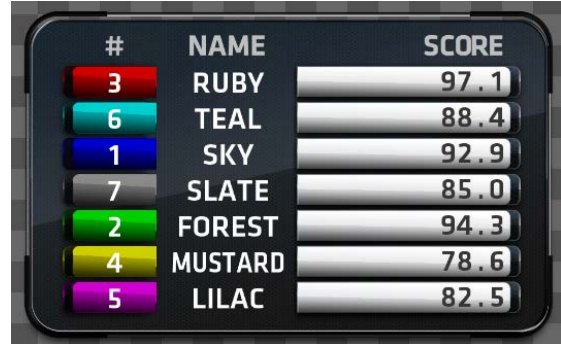

NumberText.Text	NameText.Text	ColorImage.Color	ScoreText.Text
Number	Name	Color	Score
3	Ruby	#FF0000	97.1
6	Teal	#00FFFF	88.4
1	Sky	#0000FF	92.9
7	Slate	#AAAAAA	85.0
2	Forest	#00FF00	94.3
4	Mustard	#FFFF00	78.6
5	Lilac	#FF00FF	82.5

Texture

Textures can be applied to various scene objects. Textures use the “Images” folder.

Faces

Only one face per texture

Texture Properties

Mapping: Texture wrap in X and Y dimensions.
Method of texture application outside it's dimension.

Wrap:

Clamp - Edge pixels are repeated.

Repeat - The whole texture is repeated.

Filter: Texture filtering mode.

Point - Pixel sampling, no interpolation.

Linear - Linear interpolation.

Mipmap - TriLinear interpolation of mipmap levels during minification. Linear interpolation is used for magnification.

Mipmap Anisotropic - MIPMAP with enabled anisotropic filtering.

♥This mode helps when texture get blurred because of viewing angle or non-uniform scale.

LOD Bios

Specifies a value that is to be added to the level-of-detail parameter for the texture sampling.

This parameter has effect only for mipmap texture filtering.

Value less than zero makes the image blurry. Value greater than zero makes the image sharper.

Unit

Texture unit.

File

File name which contains an image for texture.

Texture Matrix

Texture Matrix Properties

Offset: Offset defined in normalized coordinates.


Scale Factor: Same as Pivot

Rotation: Rotation in degrees. See also Pivot attribute.


Pivot: Rotation and scale pivot.

Inverse: Setting true makes the transformation inverse.

The inverted transformation makes it easier to understand and is similar to node transformation

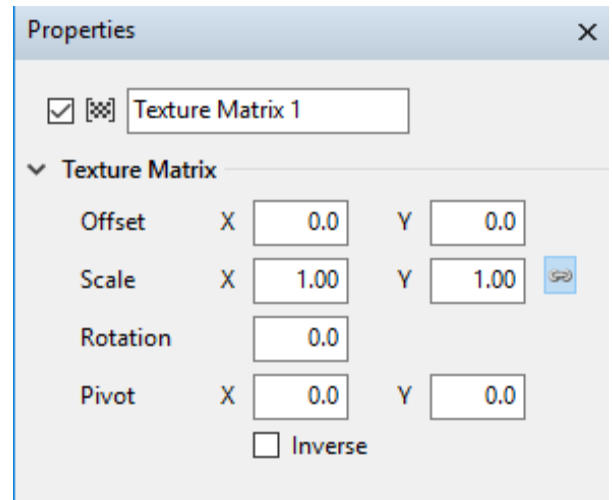

Touch

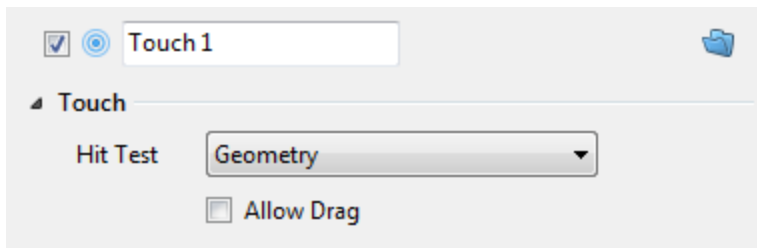

Properties

Hit Test:

- **Geometry:** Raise the touch event only when the object itself is touched.
- **Bounding Box:** Raise the touch event when touch is within the bounding box of the object.

Drag X: Allows the object to be dragged on X axis

Drag Y: Allows the object to be dragged on Y axis

Events

- **Touch Down:** Triggered on touch down
- **Touch Up:** Triggered on touch release (tap or slide)
- **Touch Move:** Triggers during drag
- **Tap:** Triggers on touch up (not slide).
 - If the touch point is more than 3 pixels, then prime will assume this is a slide, not just a tap.
 - Tap threshold can be modified through Logic condition. For example Touch1.TapThreshold = 5

Touch Setup:

Use Windows Control Panel “Tablet PC Settings” found in the “Hardware and Sound” section to configure your touch screen device.


Transform

The Transform object allows you to add an additional transform to an object. This allows you to separate the transform of your object from your animations. Using the Transform effect reduces the number of groups you'll require to achieve the same result.

Example: Add an image to a scene and position it. Add a transform effect to the image. Create an Action that animates the transition effect Position X. Now move the Position X of the image somewhere else in the scene and play the action again. The animation is the same and is relative to the position of the image. Being relative to the object it is applied to is the importance of a separate Transform effect

Update Parent Bounds setting: Disabling this check box, prevents the parent object graphic bounds from applying any transform effect offsets. This behavior can be applied when Auto Follow Source mode and Transform effect are used together, and you want to avoid an auto follow update from effecting the Transform effect animation.


Transition

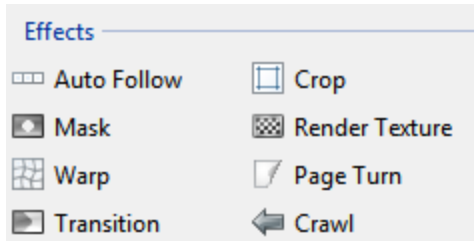


There are two types of transition that can be applied to a group or Object: **File** or **Custom**.

File Based Transitions

To create a new **File Based Transition**:

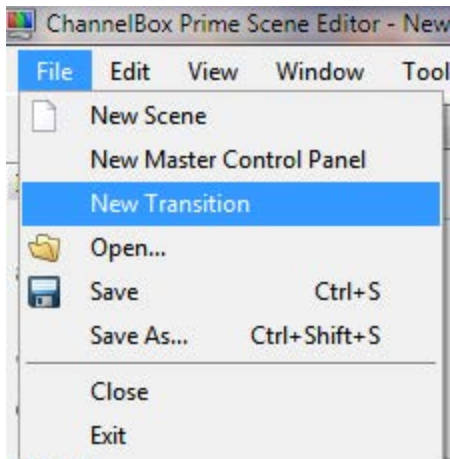


This will open the Transition Editor:

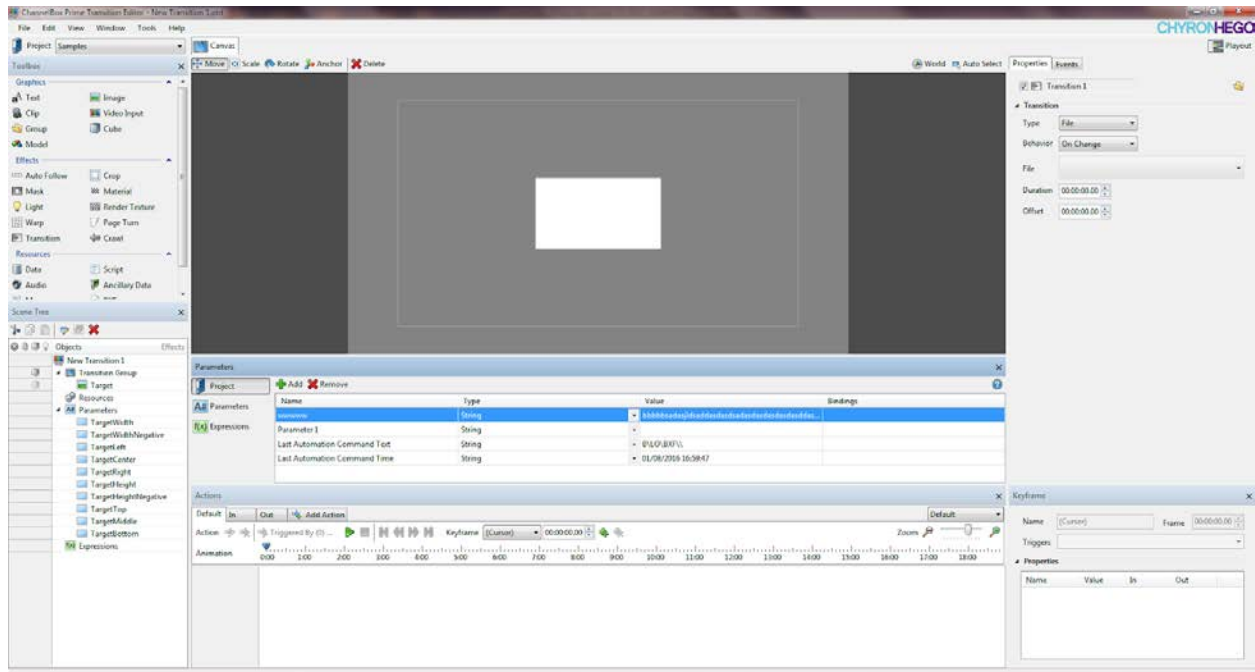

From this UI you can create transition effects. This UI begins with an “Effect In” and an “Effect out”

There is a surrogate scene tree object named “Target”. The target will be replaced by the actual scene object where the transition is applied.

Transition Properties:

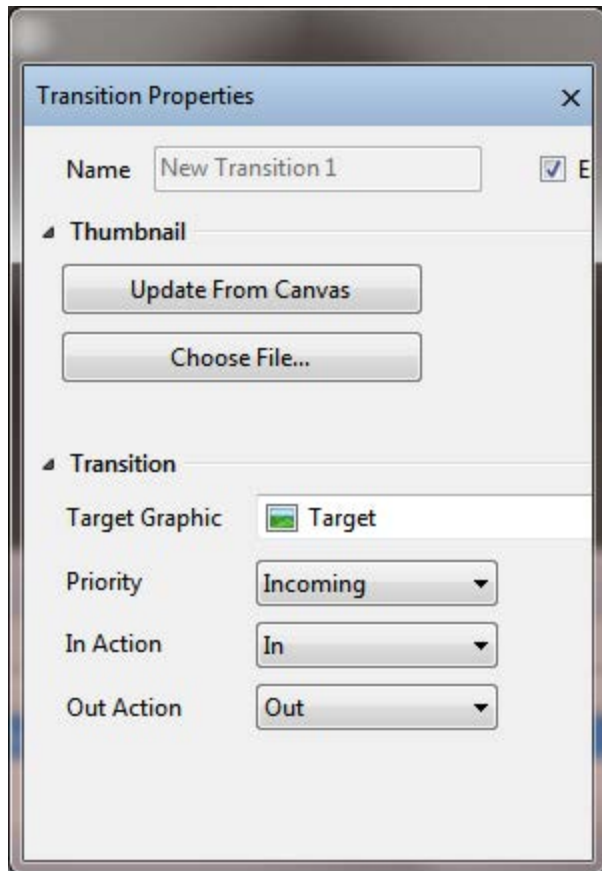


You can add many scene objects to the transition, like sound effects, flares etc. so you need to define the “Target Object” The Target object can be an Image object or a text object. When the transition is applied to a scene object it will inherit the “Target Objects’ properties.


Saving the transition will allow it to show up in the transition browser.

To use a created transition:



1. Select File > New Transition from the **File** menu. The **Transition Properties** panel will be shown:

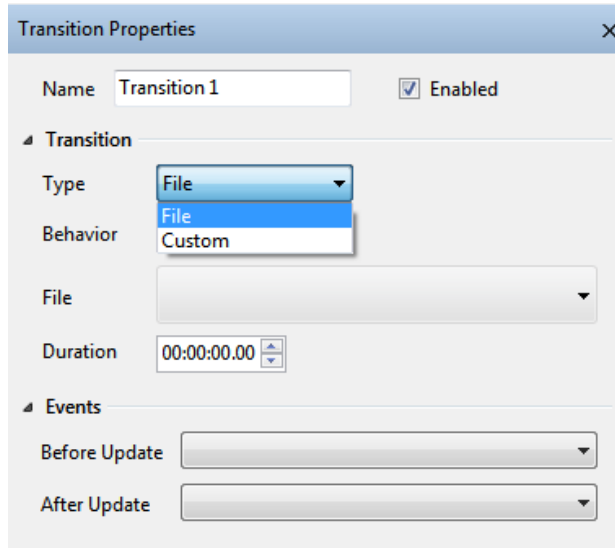

2. Once a new transition is created it will show up in the browser.

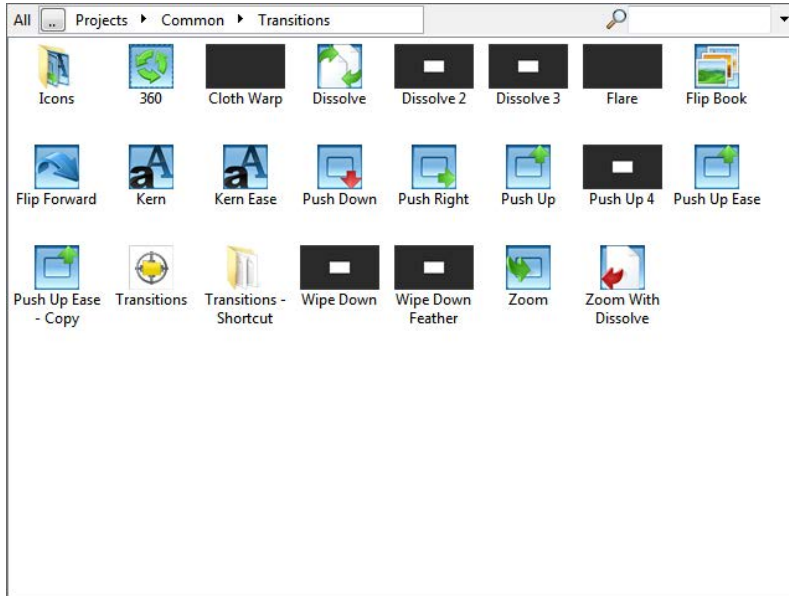

3. Select the previously created transition from the browser.

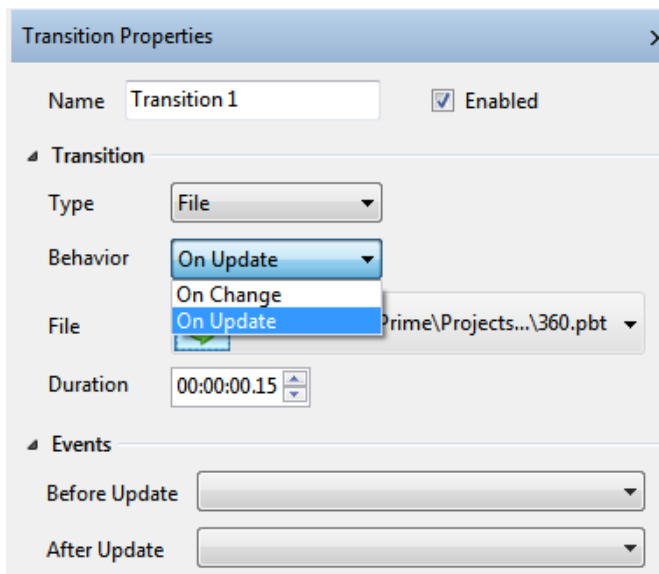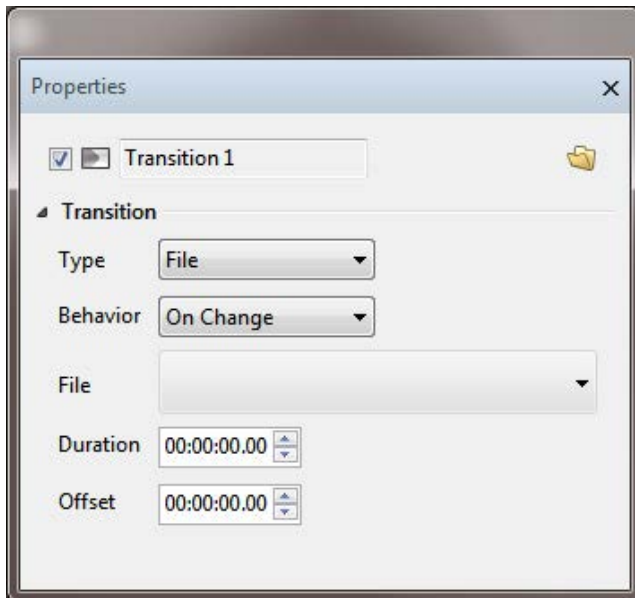

Now you can modify the properties of the transition and hook up to its internal events.

- **Behavior** - sets when the transition will fire. Your choices are “On Update” or “On change.”
 - On Update will fire for each update regardless if the data is the same or different.


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

- On Change will fire ONLY on an update if the new value is different than the current value.
- **Duration** - may be modified from its original value. This will allow for applying the same effect on multiple objects and creating a “staggered” effect.
- **Before Update Transition**
- **After Update Transition**

Custom Transitions

Custom transitions work the exact same way as file based except they require the transition to be in an existing “Action” in the scene. Simply choose your “In Action” and “Out Action”

Warp

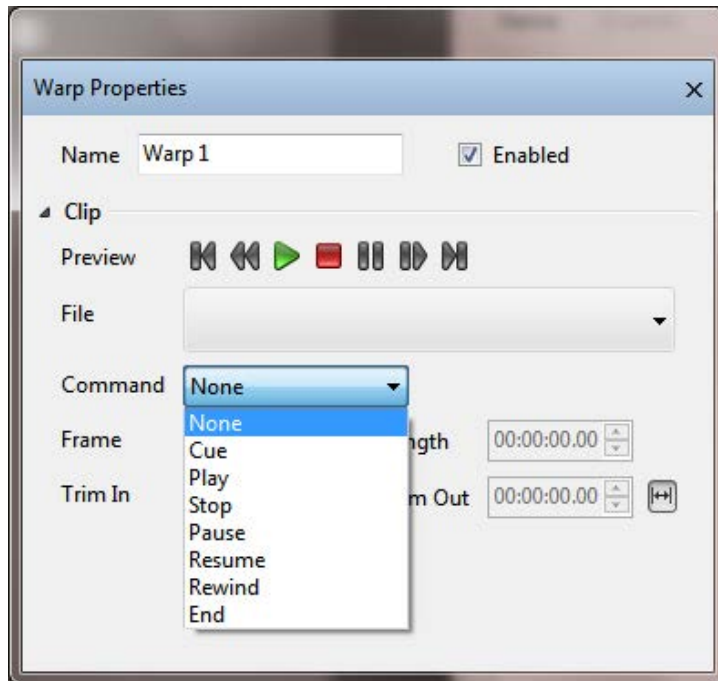

More information on Warp Clips can be found in the “Creating Warp Clips in After Effects CS6” user guide.

Virtual Group

This Effect is intended to be used in conjunction with AutoFollow Source Mode. A Virtual Group effect can be applied to multiple objects in a scene, regardless of how they have been physically grouped together in the scene tree, to “virtually” group them together. The benefit of this is the effect will give the calculated values for the Left, Top, Right and Bottom of all objects within the virtual group.

Example for using this effect: If you have a Full Screen graphic table, consisting of multiple rows and columns of data. The scene is constructed to animate each row individually. But the operator wants to change the amount of columns that display. Apply the virtual group effect to each text object, to create “virtual columns”. Then have each virtual column row autofollow the next. The virtual group will calculate the text field in the column that is the longest, making auto

follow even easier. Essentially virtual groups will do math.max calculations, using the calculated property.



Virtual Group Properties

Name: Naming convention must be exactly the same for any other virtual group effects that you want to reference within the same virtual group.

ID: Read only, Prime's reference name of the virtual group

Parent: Left, Top, Right and Bottom values of the object the virtual group is applied to. Width and Height of the object the virtual group is applied to.


Calculated: Left, Top, Right and Bottom values of all objects within the virtual group. Width and Height of all objects within the virtual group.

References: List of all items within the virtual group.


***Please Note** - Auto Spacing does not affect Virtual Group bounds.

XMP

Adobe's Extensible Metadata Platform (**XMP**) is a **file** labeling technology that lets you embed metadata into **files** themselves during the content creation process. PRIME can bind to the data stored in Image files.

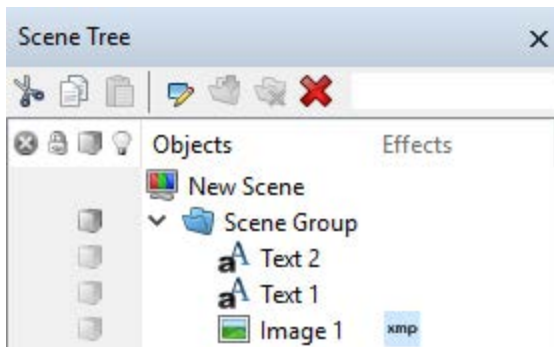

Apply the XMP effect to an image object. If the Image contains XMP metadata, the data will appear in the XMP properties window:

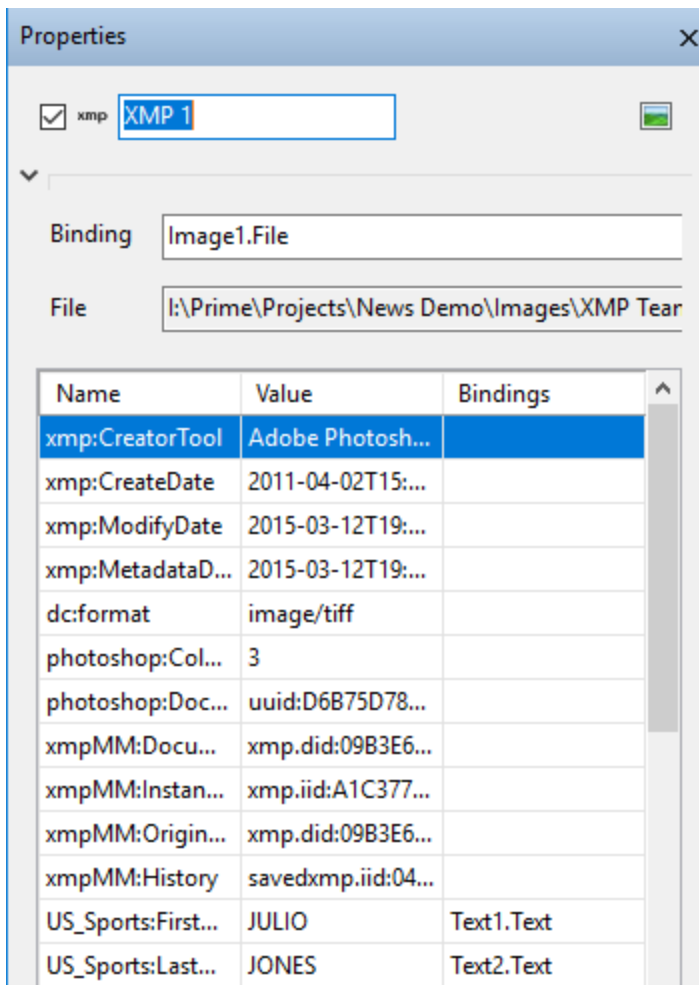


Notice the “Bindings” column. This is where you can drag and drop other object properties to bind the data. All Object properties are bindable like Color, opacity, Position etc.

Users can alternatively type manually into this field to take advantage of PROME’s “Auto-Complete” feature as well.


The Bindings field also allows for the use of Expressions.

See the separate “Parameters & Expressions” document.

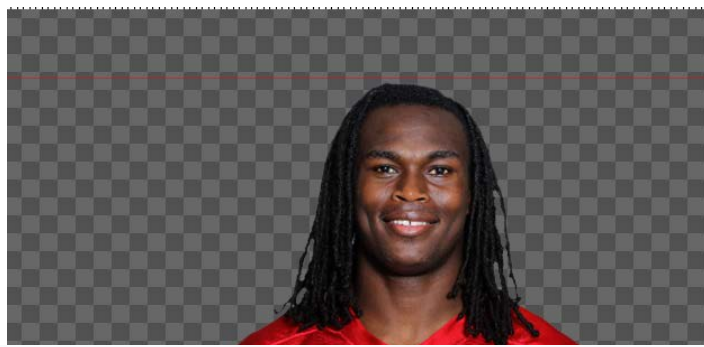

Example using an Expression:

US_Sports:FirstName	JULIO	Text1.Text = "Mr. " + value
---------------------	-------	-----------------------------



Using Auto-Complete:

US_Sports:LastName	JONES	Text
US_Sports:TV_Name1	JULIO JONES	<ul style="list-style-type: none"> Text1 Text2

In this example we will bind the image color:

US_Sports:Position	201,35,63	Image1.Color
--------------------	-----------	--------------




XMP LUCI Workflow

Any text, images or clip objects must be bound to a corresponding replaceable within Prime, to be visible and editable in the NRCS LUCI plug-in. In addition, for objects that are data bound to XMP, the replaceable must be flagged as databound.




In the Replacables window there is a databound column with a chain link icon. Click in the empty row space of the replaceable column to turn on the databound icon for each object that is databound to XMP.

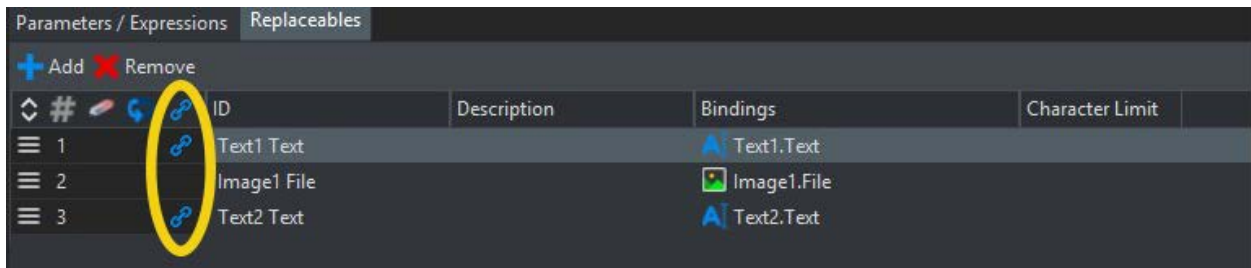


If the databound column is not flagged for each object that is databound to XMP, then the corresponding XMP data will not be visible in the LUCI plug-in.

Example of databound XMP information visible in the LUCI plug-in

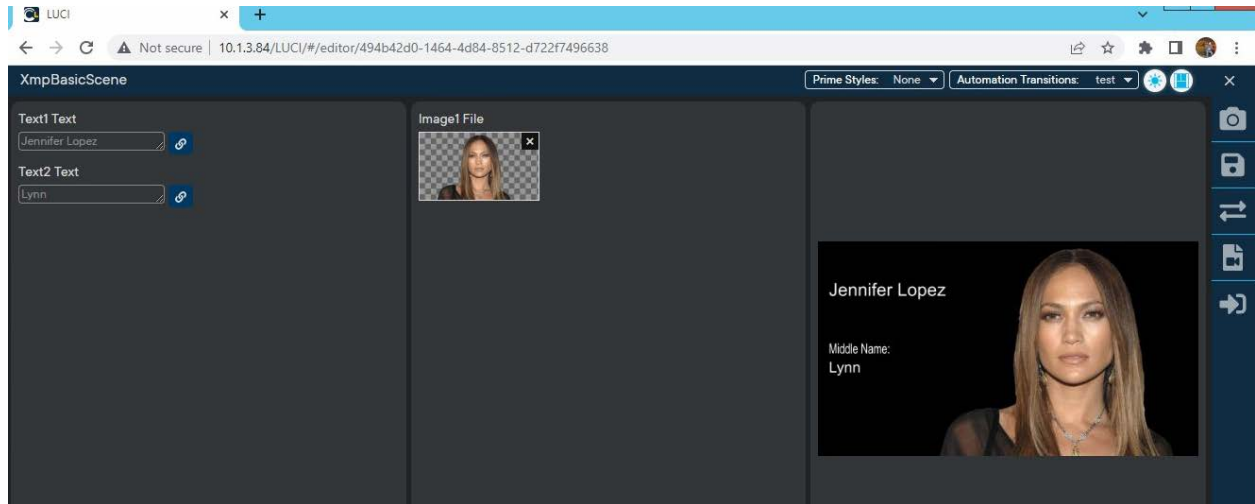



Resources

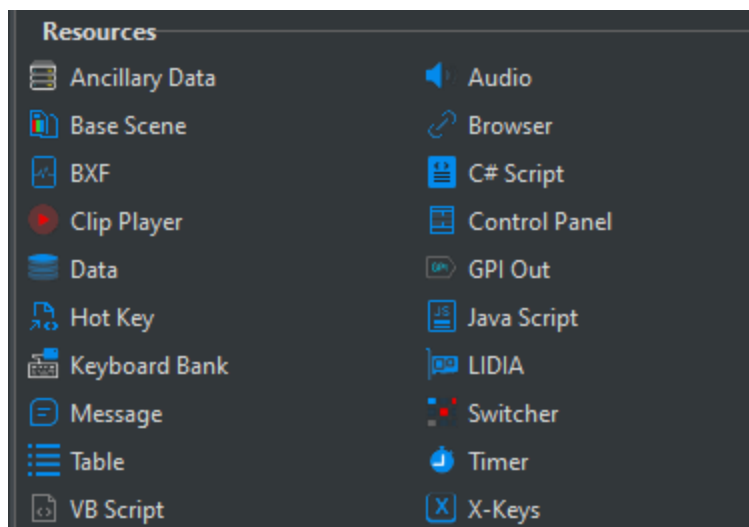


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Ancillary Data

Select the SDI Input.

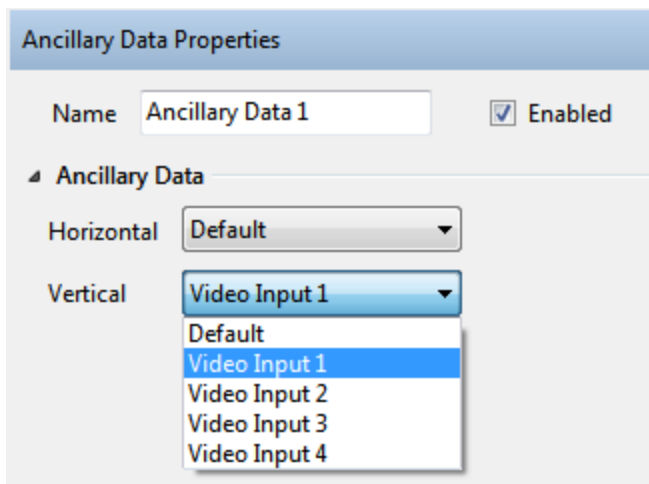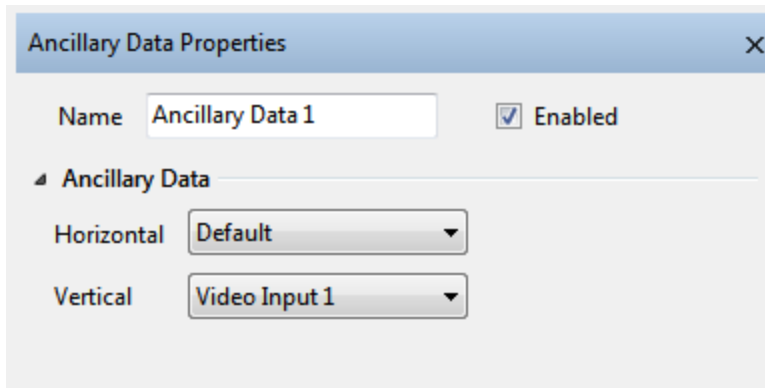

Both the Horizontal and Vertical Ancillary data selections are keyframeable allowing you to dynamically switch the source of your ancillary data.

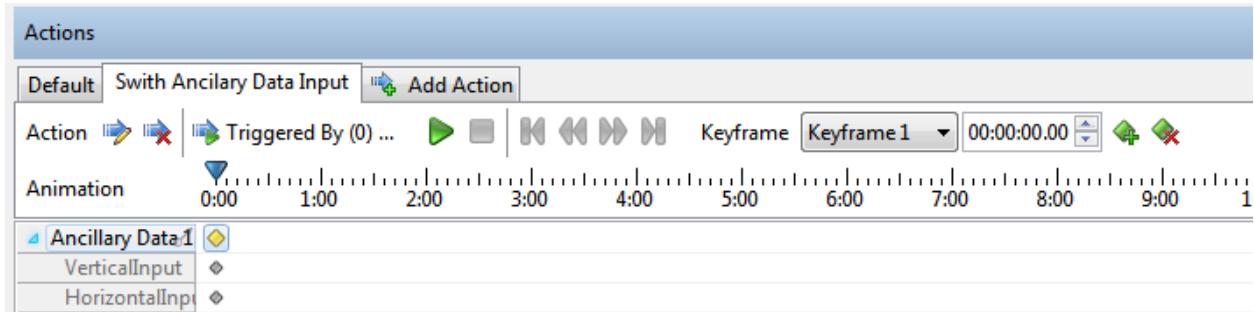



Audio

The Audio object has three modes to choose from, Audio File, Text file and Text.

Audio File


This will be a .wav file or any other supported audio file.

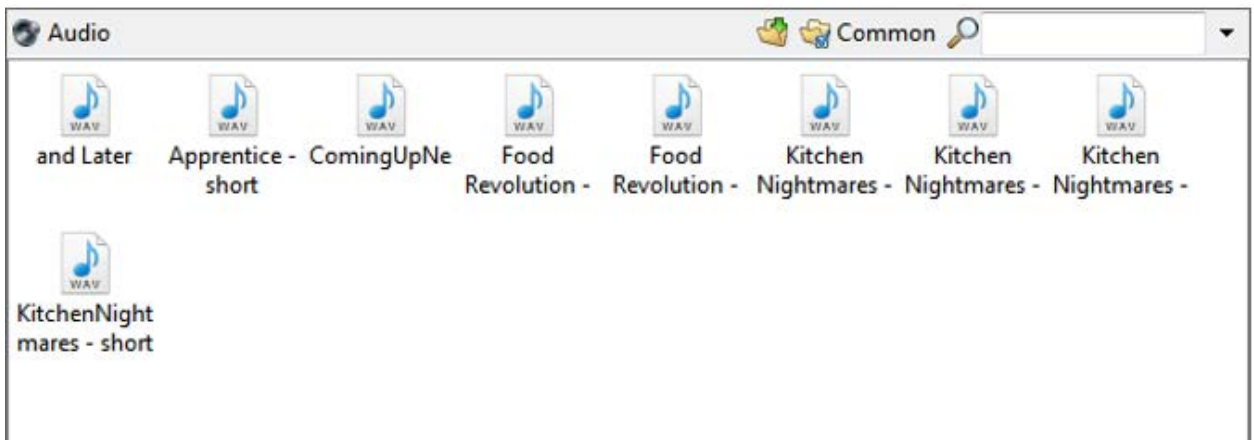

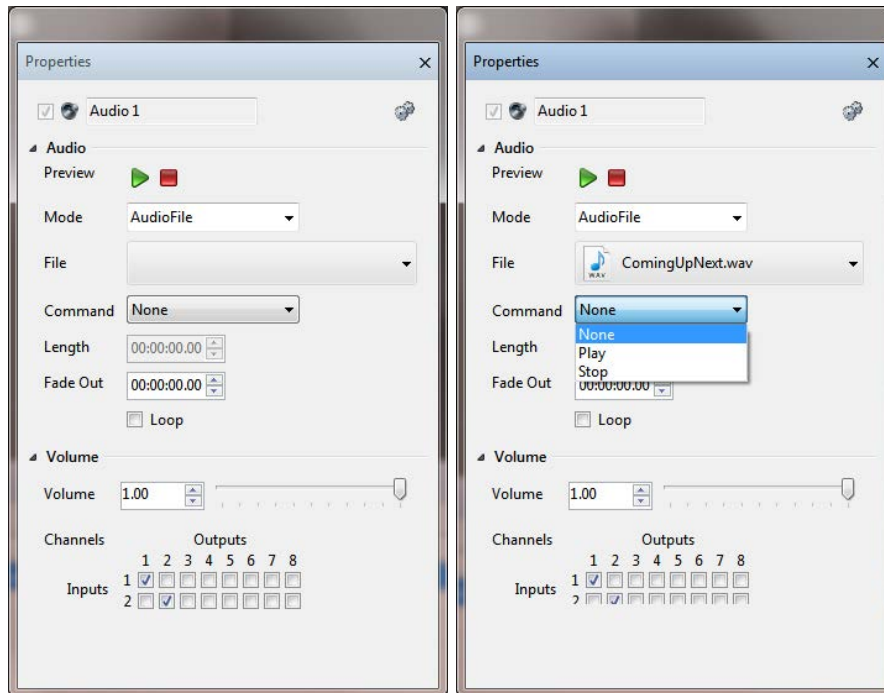

- **Commands**
 - None: Do nothing
 - Play: Plays the associated audio file
 - Stop: Stops playing the associated audio file
- **Volume** - Sets the volume level of any the associated audio file when played. The volume levels can be keyframed in the Timeline editor.
- **Channels** - Sets the output channel(s) the associated audio file will play out to.

Finished Event:

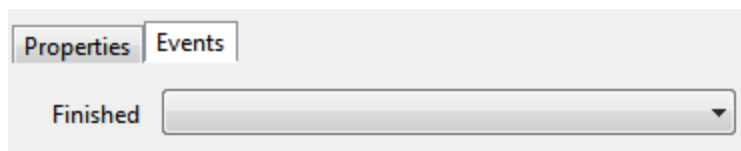


Any subscribers to this event will get notified and triggered.

Text File

A .wav file will be created based on the text file. This is “Text to Speech”

Same holds true for “Text” mode.

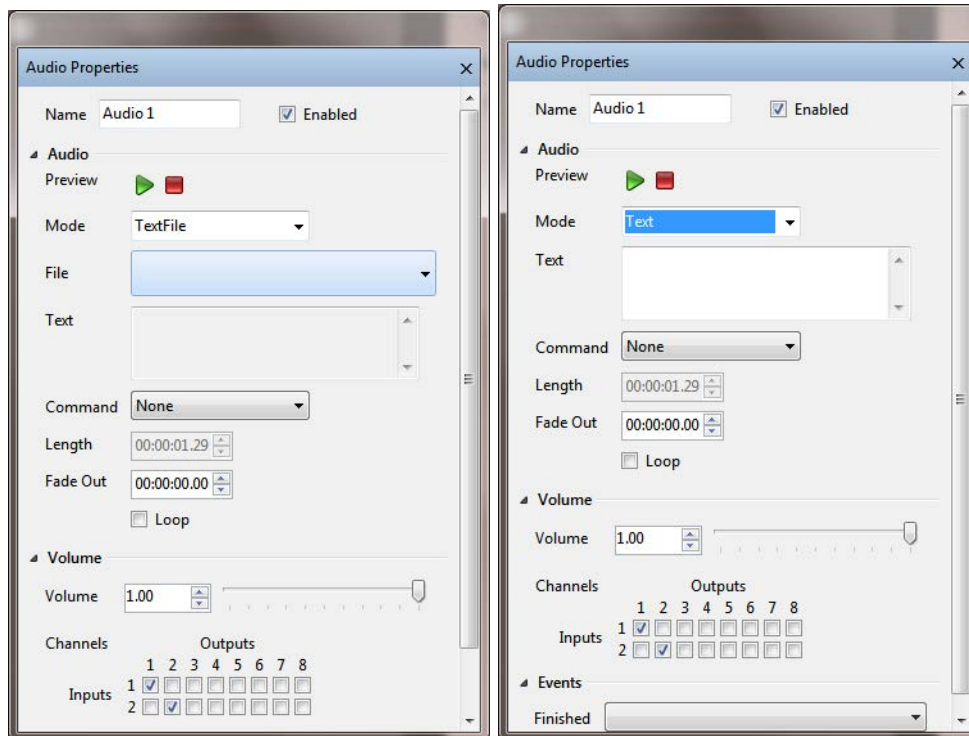


Base Scene

Base Scenes are scenes that can be referenced by other scenes. Consider Base scenes as parts and pieces that can be added to normal PRIME scenes.

This is a very powerful feature of PRIME’s ability to reference scenes from within other scenes. The base scene allows for a basic building block. Example; Create a News Full Screen graphic as a base scene that all other Full Screen graphics will reference. The Base scene should contain all the graphical elements, transitions and logic that all Full Screen graphics will share. Link the base scene to all the other Standard” scenes. If you have 100 Full screen graphics, all 100 can reference the “Base Scene”. Changing anything in the base scene will reflect to all 100 scenes.

You can add as many Base Scenes to a normal scene. Base Scenes can be created using the “File-> New Base Scene” menu item. Base Scenes are no different than normal scenes except they are tagged as “Base Scenes” and can be included in normal scenes.


Additionally, the communication from the standard scene to the “Base Scene” is built into PRIME’s “Trigger List: The Standard scene can trigger Actions and Conditions to its “Base Scene” as seen in this Triggers list screen shot:

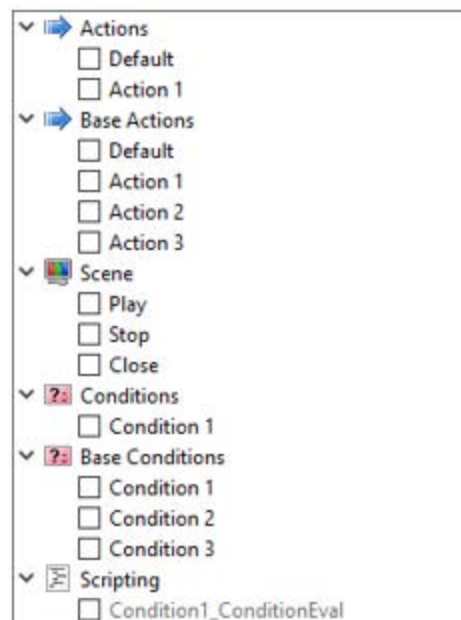

BXF-Broadcast Exchange Format- As Run Files

PRIME allows users to create “As Run BXF Files.”

To configure the BXF Global settings, select “BXF” from the PRIME main “Settings” menu:


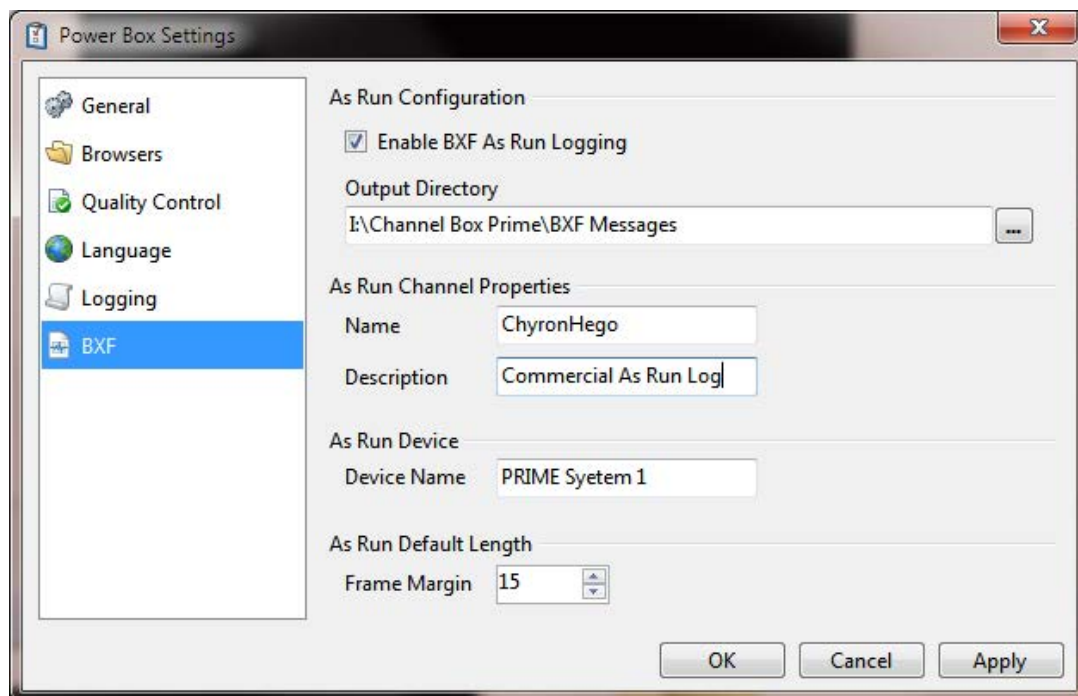


- **Enable BXF As Run Logging** – Toggle the box on/off to enable/disable BXF As Run Logging
- **Output Directory** – Specify a system location to store the BXF As Run Logging files
- **As Run Channel Properties: Name** – Specify a name for the BXF As Run channel
- **As Run Channel Properties: Description** – Enter a short description for the BXF As Run channel
- **As Run Device: Device Name** – Specify a name for the BXF As Run Device
- **As Run Default Length: Frame Margin** – The default length settings allows a margin for error when the asset is played out.

Ex: If a sponsored logo is set to air for 15 seconds, it will be considered “Aired **Without Discrepancy**” if it airs for 14 seconds and 15 frames due to the Frame Margin being set

to 15 frames. If the logo airs for 14 seconds and 14 frames, the BXF file will be reported as “Aired **With Discrepancy**.”

To add a BXF resource to your scene and configure its Properties:

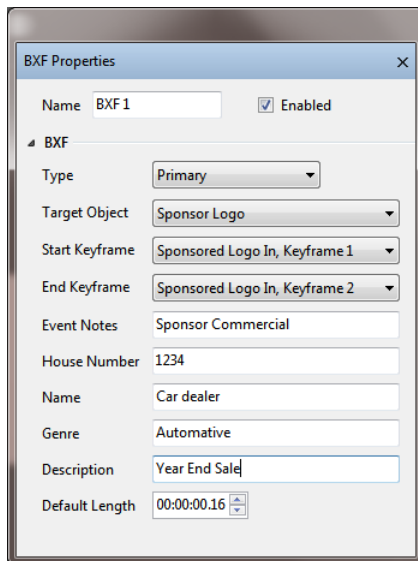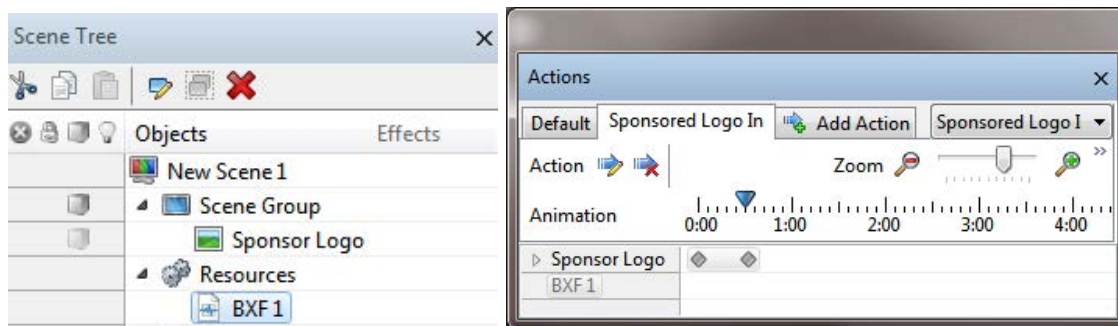


- **Name** – Object name to be referenced throughout the scene
- **Enabled** – Enable/disable this object
- **Type** – Map this to the type defined in your traffic system
- **Target Object** – Object in the scene this BXF refers to
 - **Start/End Keyframe** – Start/End keyframes that brings this on/off air
- **Event Notes** – User friendly notes
- **House Number** – Match the traffic system house ID
- **Name** – Traffic system name for this House ID
- **Genre** – Type in a genre for this House ID

- **Description** – User friendly description
- **Default Length** – Minimum duration on air this items is required to air

When the action to bring in the sponsored logo is played a BXF file will be created in the folder defined in the global settings.

Clip Player

The Clip Player resource allows users to have access to any “Clip Controllers” defined in the PRIME Playout Configuration:

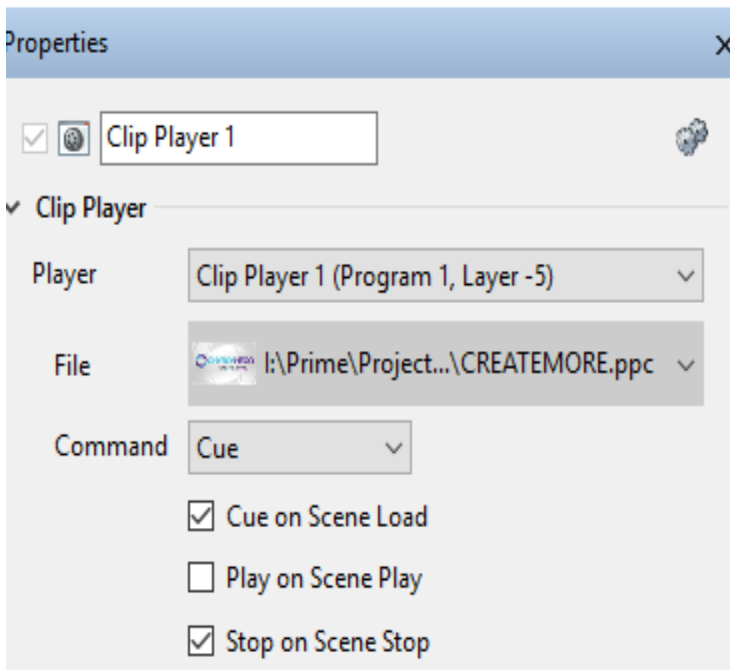

Player: Enumerates the clip players defined in the PRIME Playout Configuration “Clip Players” section.

Each clip player has an output channel and a layer number assigned to it. (Program Channel 1, Layer -5)

File: Associates a clip to this player

Command: These commands control the clip player and can be keyframed. The Clip Players commands are automatically added to Primes “Trigger List” for access everywhere.


Cue on Scene Load: When the scene is loaded into preview cue the clip.

Play on Scene Play: When the scene is taken to air play the clip.

Stop on Scene Stop: When the scene is taken off air stop the clip

Clip Player Events:

Allows triggering items from the triggers list

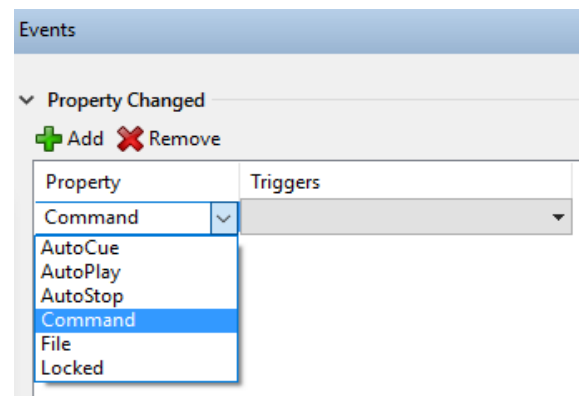

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Control Panel

A single Control Panel resource can be added to each individual scene or base scene. See [Scene Control Panel](#) in this user guide for more information.

Data

The Advanced Data Object is documented in the Prime Data Object Guide

GPI Out


GPI Out can be added to any scene as a resource within the scene.

GPI Out Properties:


- **Device:** ID of the device. Multiple devices can be used
- **Pin:** Pin number for the out
- **Mode**
 - **Pulse:** Sends out a pulse “High to Low” or “Low to High”.
 - **Manual:** Send the “High or Low” manually. Can be assigned to a keyframe or a control panel button
- **Pulse Direction:** Set “Low to High” or “High to Low”
- **Pulse Duration:** When Pulse mode is set to “Pulse” set the duration between the “High to Low” or “Low to High”. of the pulse
- **Pulse:** Sends the pulse.

GPI Events:


- **On Pulse:** Event happens when GPI is pulsed
- **On High:** Event is raised when GPI goes to high from some other state
- **On Low:** Event is raised when GPI goes to Low from some other state



When the mode is set to “Manual” two commands will be available in the Triggers list, “High & Low”:




When the mode is set to “Pulse” The Triggers list will show “Pulse” only.



To trigger a GPI out from the timeline, create a keyframe in the timeline editor by clicking the “Add Keyframe” button.

From the “Keyframe Editor” select the “Triggers” combo box that will show the above (Figure 1 & Figure 2)



GPI In

GPI In resource can be applied to:

- Scene
- Application
- Project


GPI In can be added to any scene as a resource within the scene.

GPI In Properties:

- **Device:** ID of the device. Multiple devices can be used
- **Pin:** Pin number for the in

GPI Events:

- **On High:** Event is raised when GPI goes to high from some other state
- **On Low:** Event is raised when GPI goes to Low from some other state



Hot Key

Hotkey resource can be applied to:


- Scene
- Application
- Project

Key

Select the Key(s) you wish to assign the Hot Key

Command

Select the command (action, condition, sequence ect.) you wish to trigger when the designated keyboard hotkey is pressed.

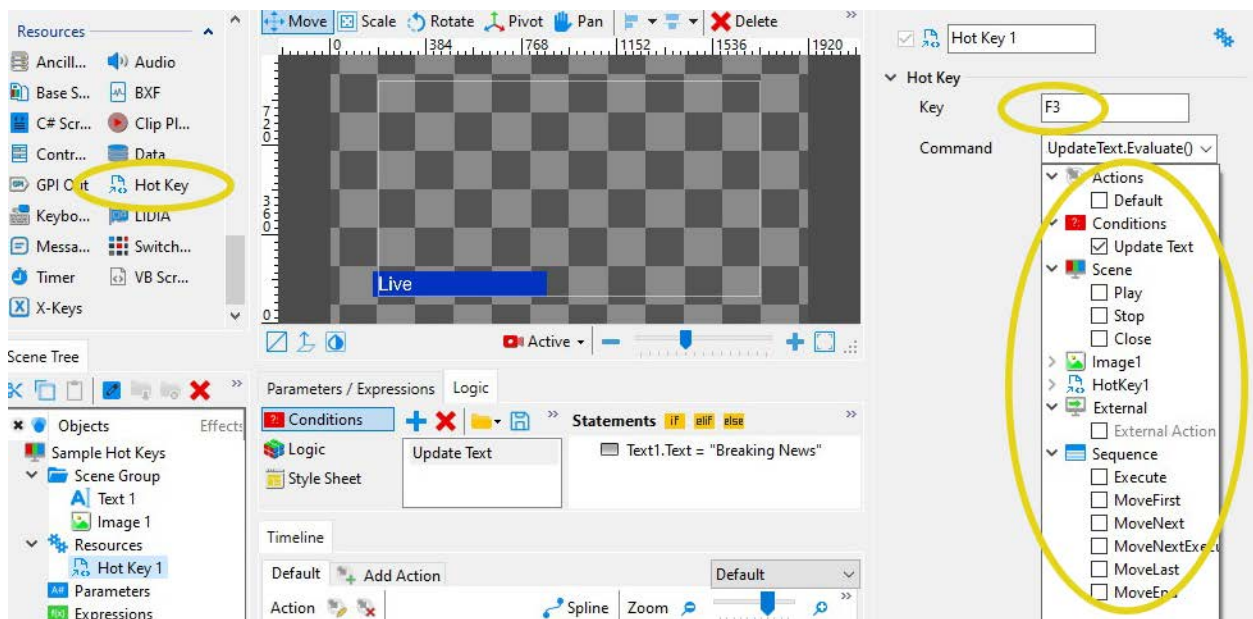

If a hot key has been assigned in multiple places all of the assigned commands will execute.


**The order of execution is the order in which they are registered in Prime. Generally this will be Application, then Project then Scene. At the scene level it will be prioritized in the order they are played to output.*

Hot Key Advanced: Control Panel Focus executes Condition with a Hotkey
This feature allows an operator to tab into a control panel object (which sets the focus) and press a hotkey to run a condition.

Logic Syntax

- ControlPanel.IsActive
- ControlPanel.ActiveControl
- ActiveControl.GetTargetObject()

Example use case is the ability to change the color or weight of the text object bound to the control panel text object that has focus.

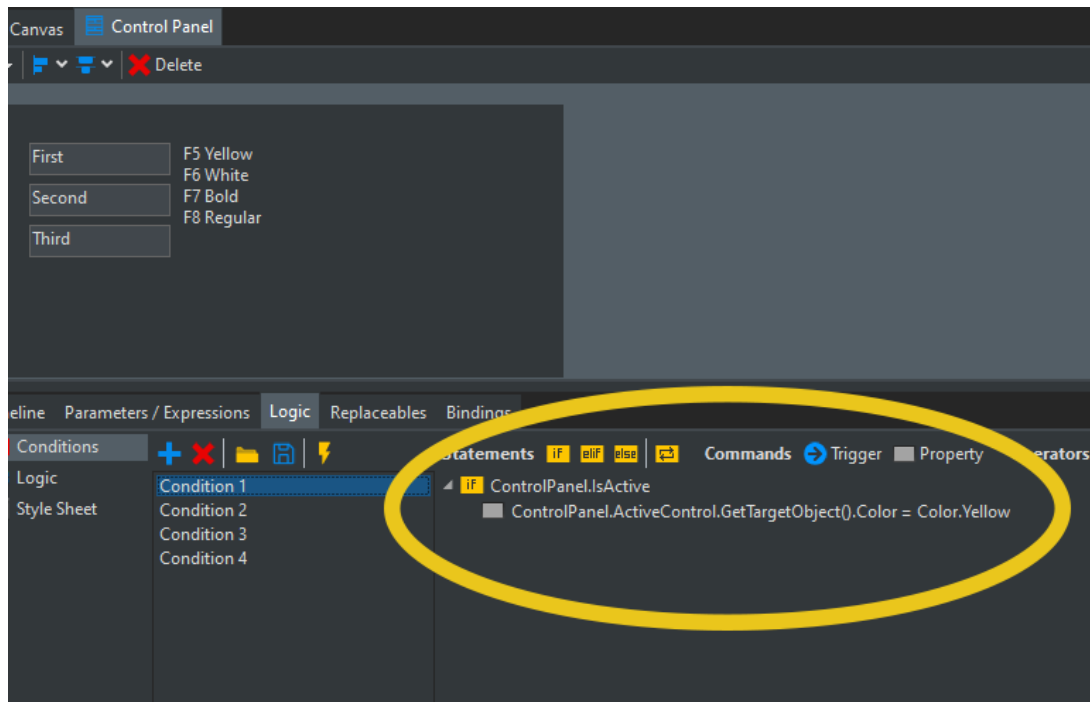

- Parent Keyword
 - This will allow for the active control property to update graphics near selected text object
 - Parent keyword is accessible in logic statements
 - For example `Text1.Parent.Background.File = "abc.png"` could be used to update an Image named Background that is a sibling to Text 1

Hot Key Logging:

Hot Key triggers can be enabled in Prime workflow Logger.


LIDIA

See the separate dedicated LIDIA Users guide. [PRIME LIDIA.pdf](#)


Message

The message object allows you to output messages via Serial port or by Network (Via TCP or UDP).

The “Message” property may be “keyframed” in an Action or the “Send” command can be triggered from an event. This will transmit the message out.

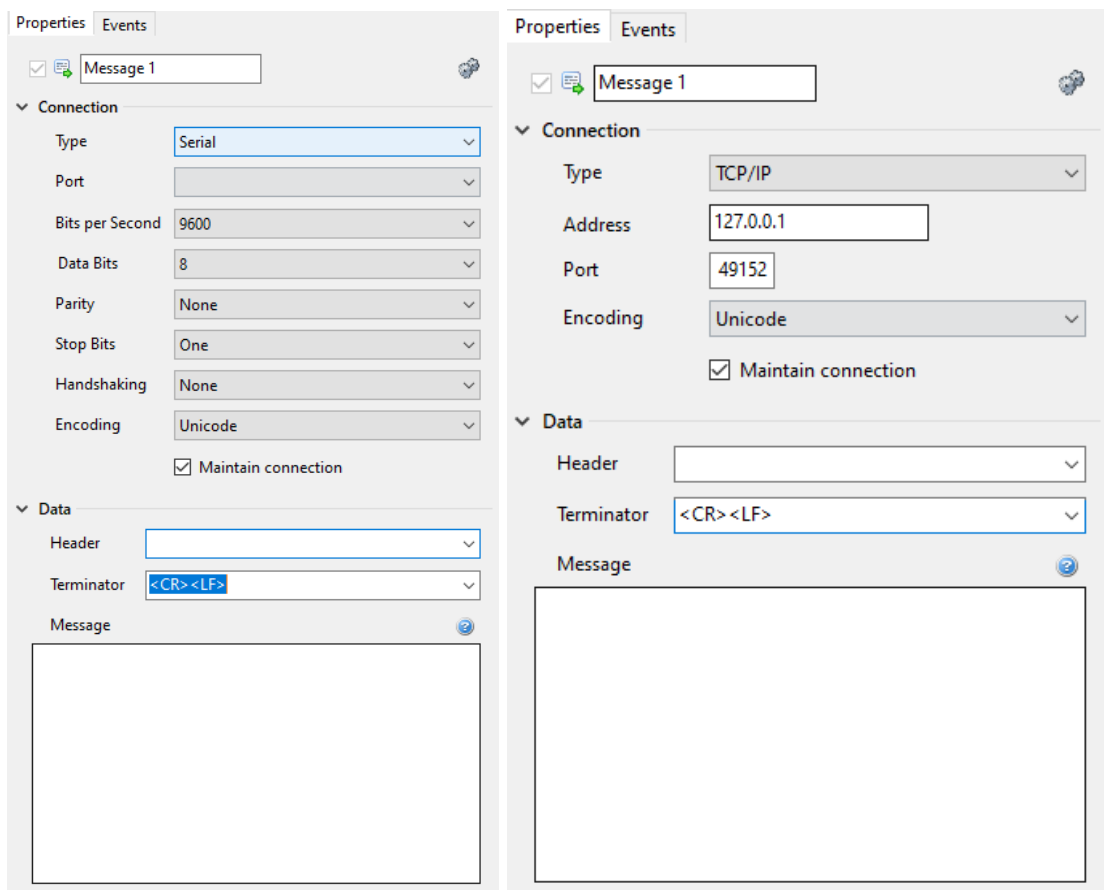

Maintain Connection: When checked, the Message resource connection will open on scene load and close on scene close. It will timeout after 5 seconds if a connection cannot be established.

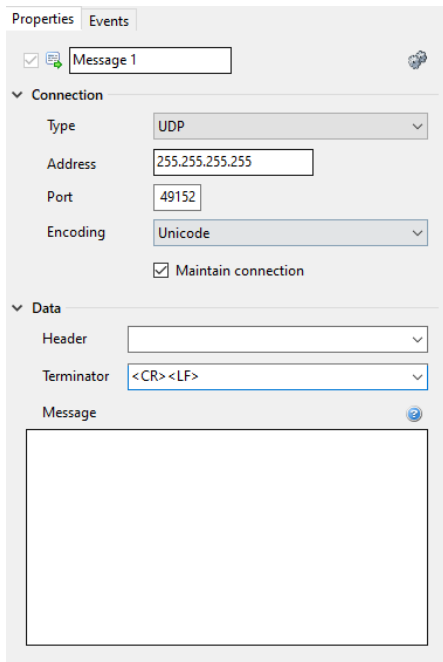

In UDP mode to broadcast across the entire network set the “Address” property to “255.255.255.255”

The message property supports common non-printing codes, hex values, and plain text. Codes and hex values need to be surrounded in a tag (angle brackets < and >) to be interpreted correctly. Plain text can be written anywhere and do not require tags. If a tag is not recognizable, it will be left untouched. If necessary, angle brackets can be escaped with a leading backslash (\<).

Code examples:

- <LF> will be replaced with the line feed character
- <TAB> will be replaced with the tab character
- <EOT> will be replaced with the end of transmission character

Hex examples:

- <A> will be replaced with the line feed character
- <41> will be replaced with the A character
- <7D> will be replaced with the } character

See the user’s guide for more information.

Message formatting also applies to the Header and Terminator properties found in the screenshots above.


Plugins

See the separate “PRIME Plugin User Guide”.

Table

Adding a table resource to a scene will open a new table window. To toggle visibility of the dockable Table window navigate to View in the toolbar.

Table Properties

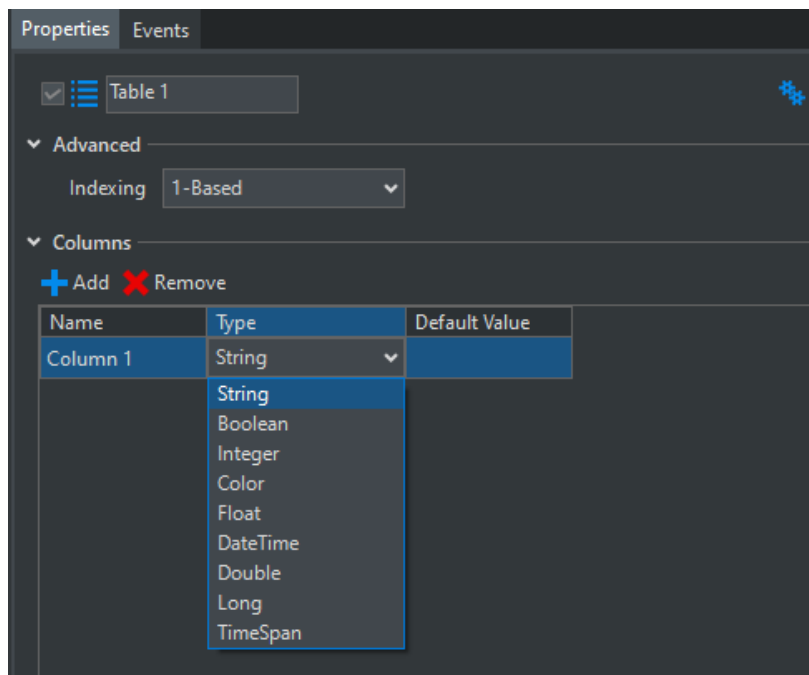

- Table Name: Editable alphanumeric text field
- Advanced:
 - Index: Option for first row to begin with 1 or 0. Select from drop down 1-Based (default) or 0-Based
- Columns
 - Add Column
 - Name: Alphanumeric column name
 - Type: Select column default type. Table cell value must adhere to column type. For example String = alphanumeric, Boolean = true or false, Color = Hex or RGB value
 - Default value

Table View

The screenshot shows the Chyron Prime interface with a table view and its properties. The table view displays a table with columns: Name, Last Name, Age, Democrat, and Republican. The properties panel shows the table configuration, including column names, types, and default values.

Name	Last Name	Age	Democrat	Republican	
1	Joe	Biden	80	<input checked="" type="checkbox"/>	<input type="checkbox"/>
2	Donald	Trump	76	<input type="checkbox"/>	<input checked="" type="checkbox"/>
3	Name	Surname	0	<input type="checkbox"/>	<input type="checkbox"/>
*				<input type="checkbox"/>	<input type="checkbox"/>

Name	Type	Default Value
Name	String	Name
Last Name	String	Surname
Age	Integer	0
Democrat	Boolean	False
Republican	Boolean	False



**For manual entry of data, begin with creating columns in Table properties*

Table Toolbar

- Add: Add row
- Remove: Remove Row
- Import: Import CSV
 - Import Comma Delimited File. Format available in Excel & Google Sheets
 - Prime will automatically pre-determine column type by analyzing the data in the column.
 - Option to “Use First Row as Column Headers”
 - Delimiter Options
 - Comma
 - Pipe
 - Semicolon
 - Tab

*.CSV files can be delimited with different characters (not just commas). This allows the user to specify the delimiter when importing a csv to a table.

Import CSV Examples

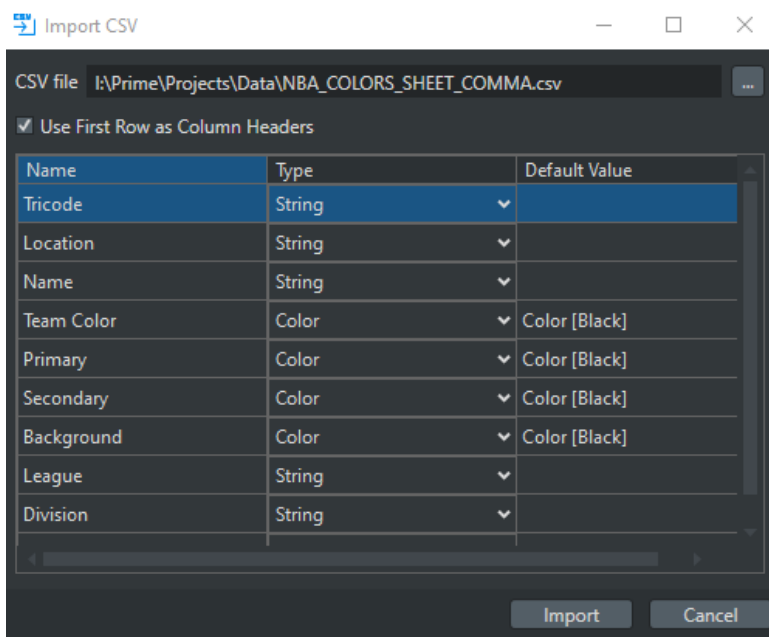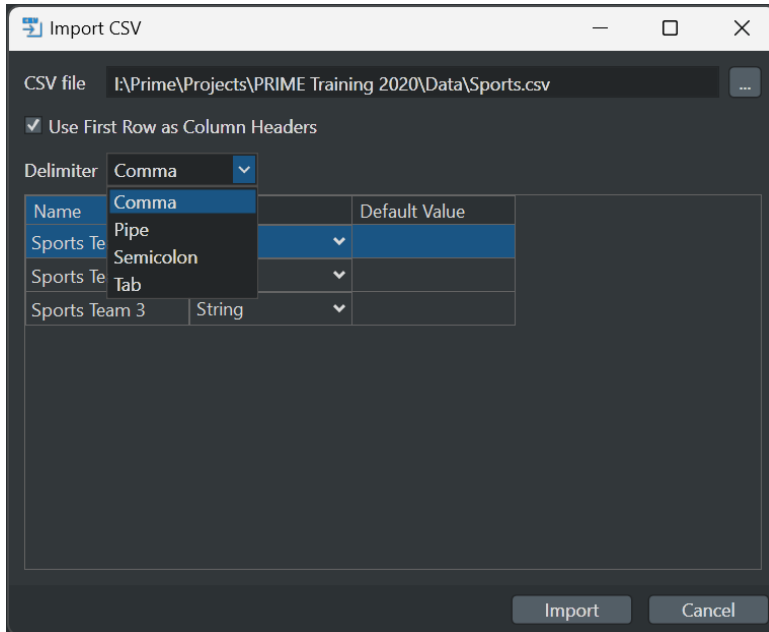

- Table View Shortcut Keys

Insert Row Above	Alt+I,R
Insert Row Below	Alt+I,B
Insert Column Left	Alt+I,C
Insert Column Right	Alt+I,O
Clear Contents	Alt+E,V
Delete Row	Alt+E,D
Delete Column	Alt+E,C
Select Row	Shift+Space
Select Column	Ctrl+Space
Cut	Ctrl+X
Copy	Ctrl+C
Paste	Ctrl+V

- Table Arrangement in Table View
 - Column can be dragged and dropped into preferred order
 - Row can be dragged and dropped into preferred order
 - Color Type: Enter a HEX, RGB value or use color picker control

	TeamColor	TeamName	TeamLogo	BackColor	Scored	Allowed	Points
1	#821010	Slavia Praha	bohem.png	#FFFFFF	63	17	50
2	#F2E446	Viktoria Plzeň	plzen.png	#470CF7	43	18	49
3	#FFFFFF	Sparta Praha	sparta.png	#000000	51	22	48
4	#A9B6C9	Slovácko	slovacko.png	#1100FF	26	30	35
5	#005E34	Bohemians	bohem.png	#377A00	37	38	32
6							
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
*							

Table Resource can be added to replaceables. This allows table data to be updated through Camio workflow and/or through Intelligent Interface commands.

- Data property for Table Resource:Replaceable = Tab-delimited Data without the Column Names Rows. Tab will used as column separator, new line will used as row separator
- JSON property for Table Resource: Replaceable = JSON Data


Data Object data sources can be ingested into the Table Resource. Please see the PRIME Data Object Guide for more information.

Script

Refer to the [PRIME_API_Scripting_Guide](#) for more

The Script Resource Object allows for C# scripting to be part of the scene. A full C# editor with intellisense (Auto Complete) becomes available. The C# Script Resource allows access to the entire PRIME API.

Timer

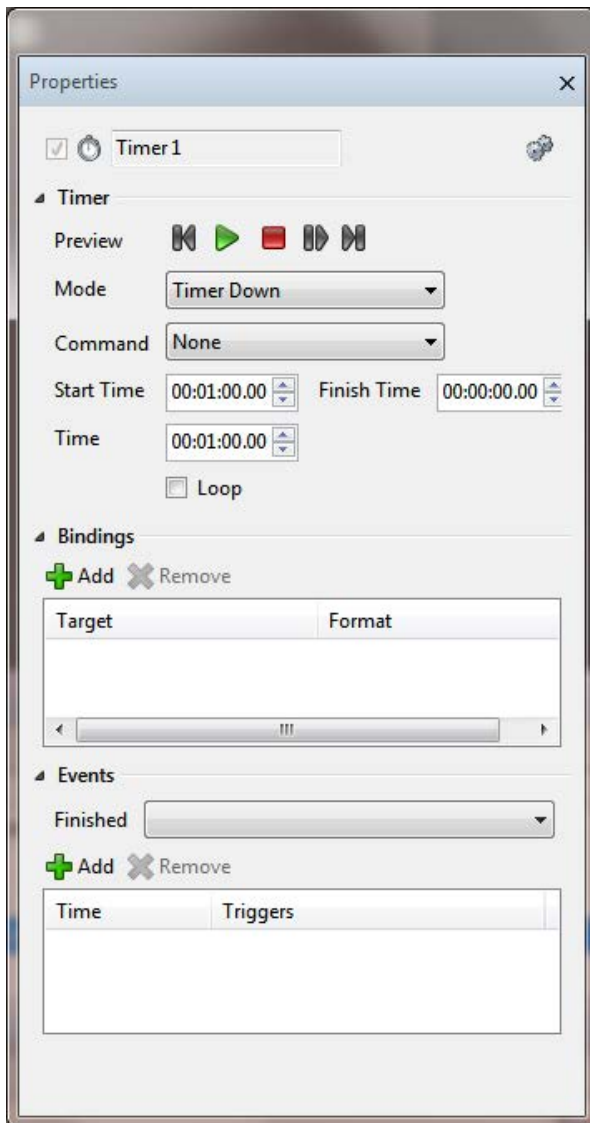

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

The **Timer Properties** panel allow users to configure:

- **Modes:**

Clock

Display the system Time of Day. Includes Time zone properties

Timer Up

Counts upwards to specified time

Timer Down

Counts downward from specified time

Time Countdown

Counts downward from specified future time

Date Countdown

Counts downward from specified future Date


Time Countup

Counts upwards to specified time

Date Countup

Counts upwards to specified Date

Timer Commands

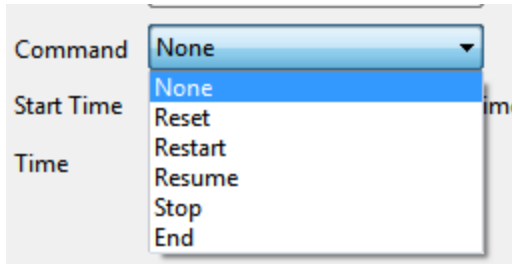


- Bindings - Binds the clock value to the scene object(s)

Events


- Started
- Stopped
- Finished
- Users defined events may be added as well to the “Time Elapsed” event list


Property Changed Events

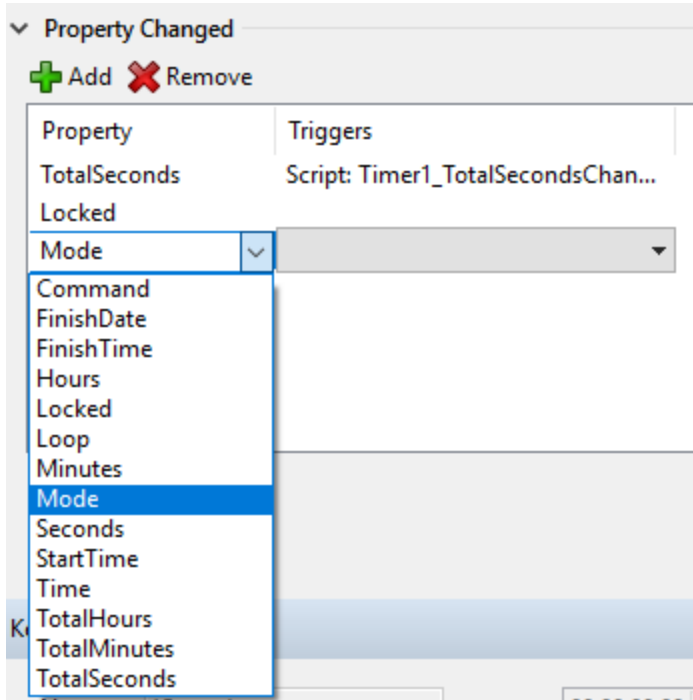

Formats


- o Days, Hours, Minutes, Seconds, Frames

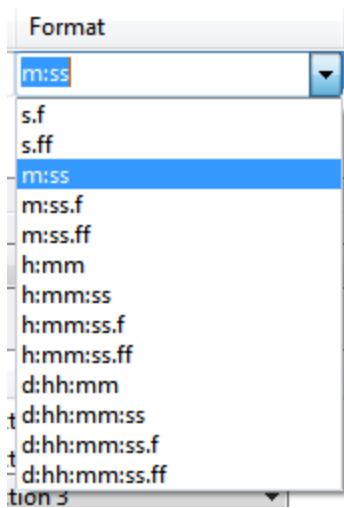

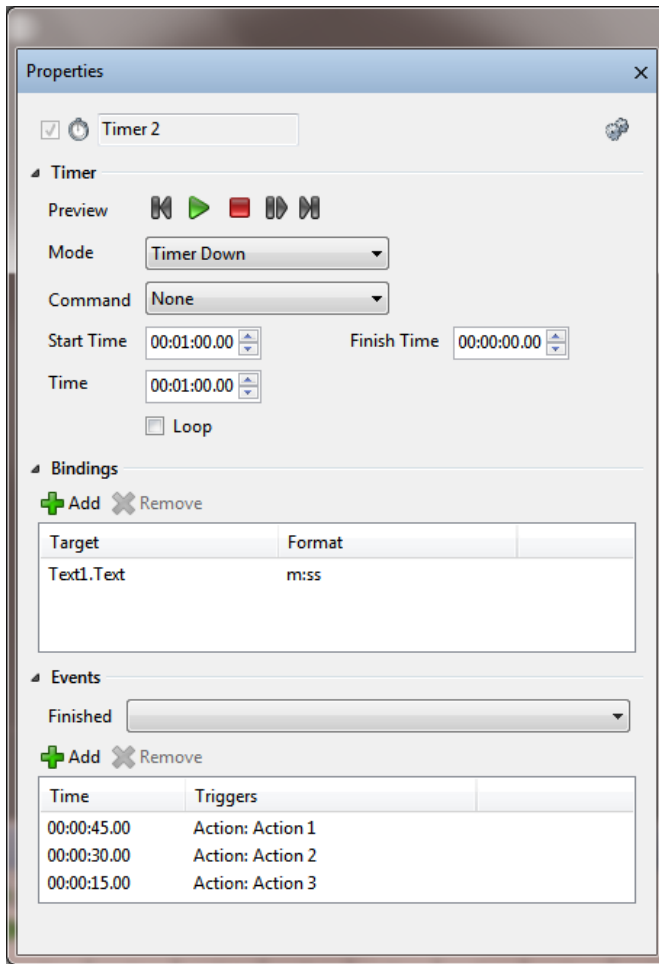


String literals can be applied in the format using the backslash character

So `d:\d\a\y\s` will display the “4 Days” if `d=4`.

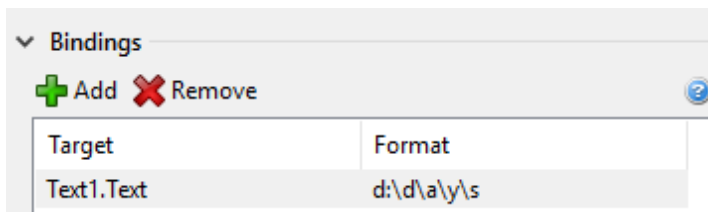


Or quote the text you wish to display this way:

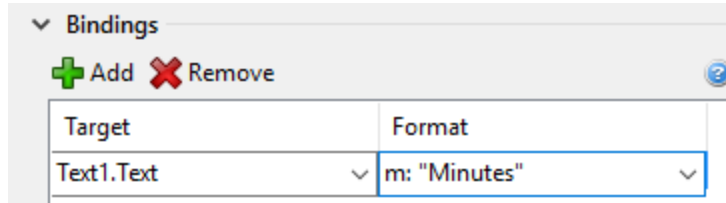

- **Events**

- Started: Triggered when the time starts
- Stopped: Triggered when the clock stops
- Finished: Triggered at the defined finish time

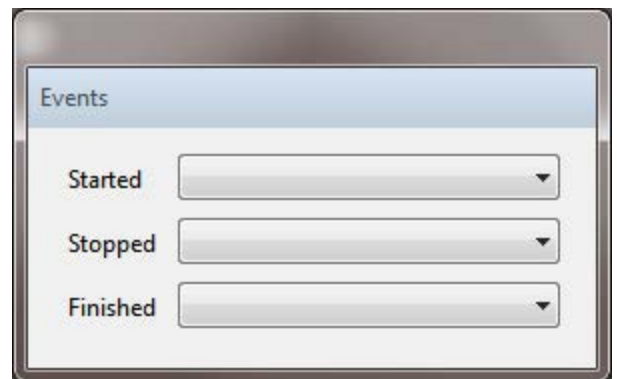


XKeys

XKeys can be set up globally in PRIME Playout module or can be scene based.

Playout


If users configure XKeys from the Runtime user interface, these button presses will act globally regardless of any scenes being currently opened.

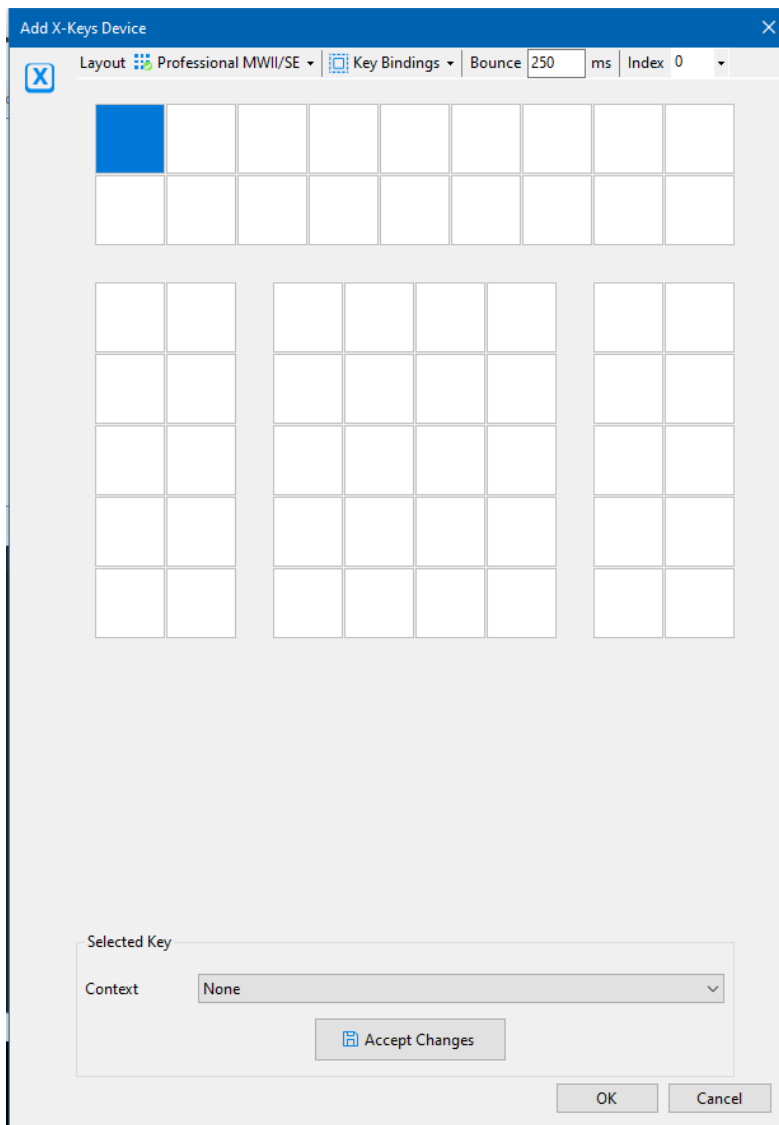


The “Index” property allows for multiple XKeys devices to be daisy chained. If multiple devices of the same type are plugged in PRIME will allow users to target each separately by using the “Index” property.

Scene based

Key up-Down properties will expose the Triggers list for users to hook up events to the key presses

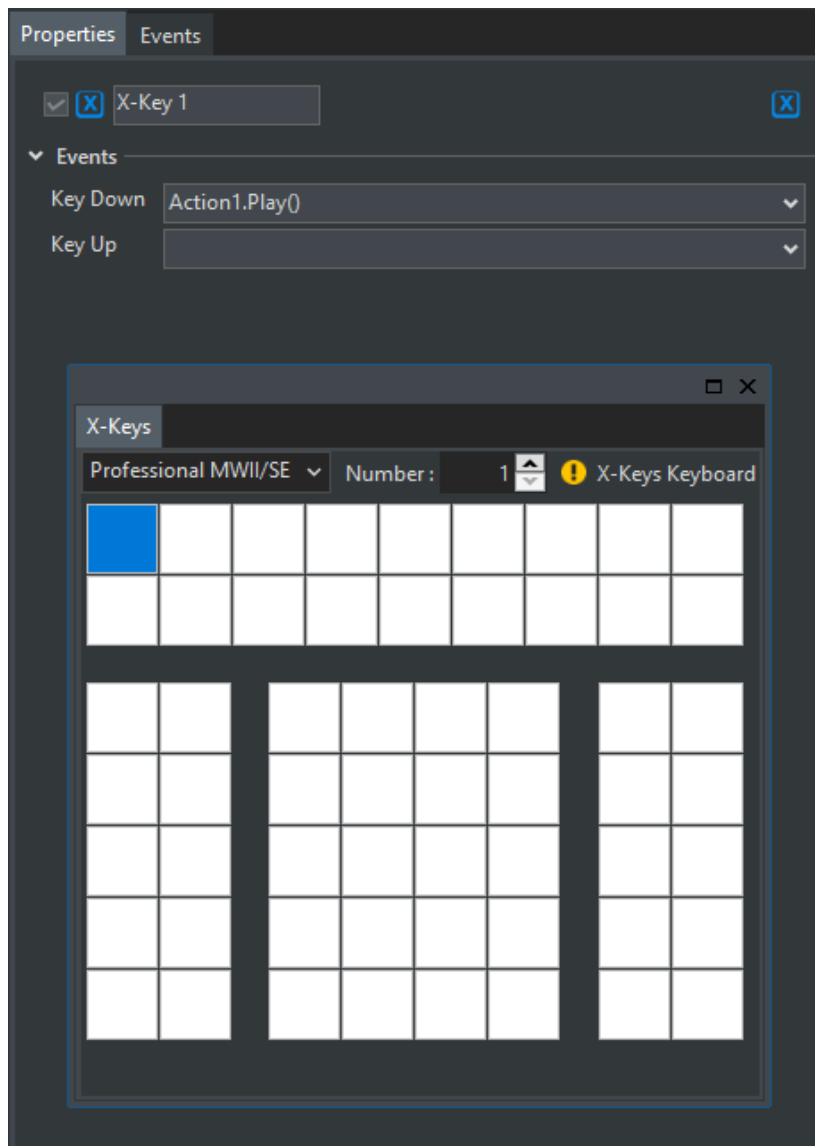


Scene Tree

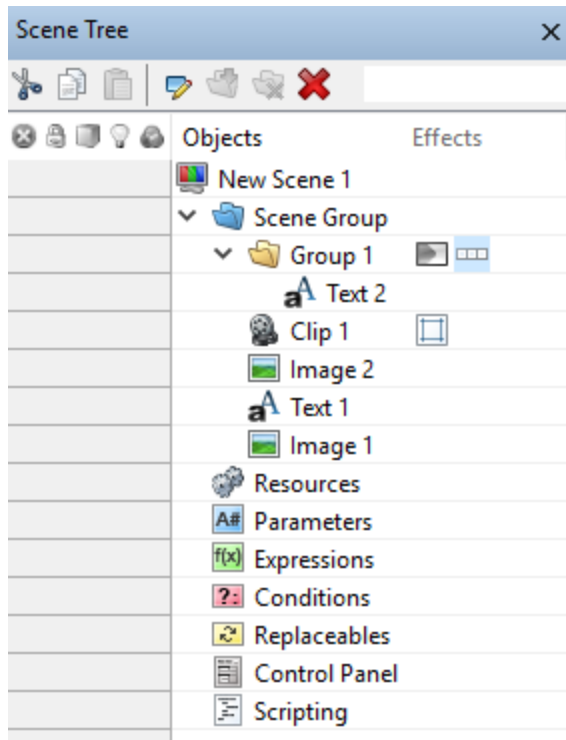

The **Scene Tree** is divided up into four sections:

- **Scene elements**
- **The Scene Control Panel**
- **Scene Resources**
- **Scripting**


The Left Column allows for toggling:

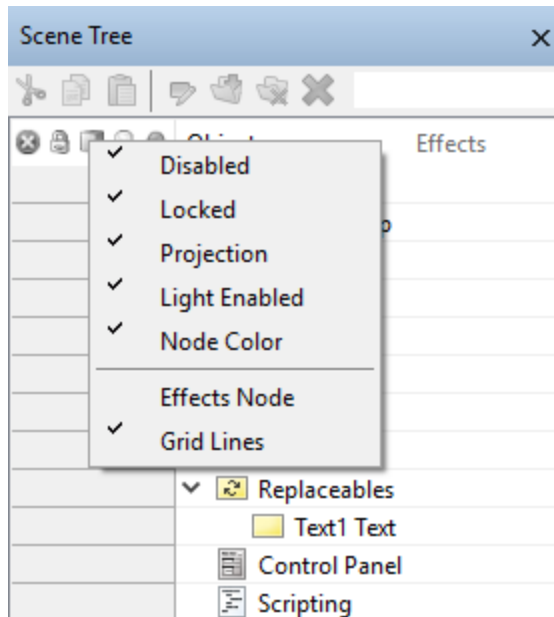

- **Enable/Disable**
- **Lock/Unlock**
- **Projection Perspective choices**
- **Light Enabled/Disabled**
- **Node Coloring**

Right click on the left column toolbar to hide/show these:

The Objects Column

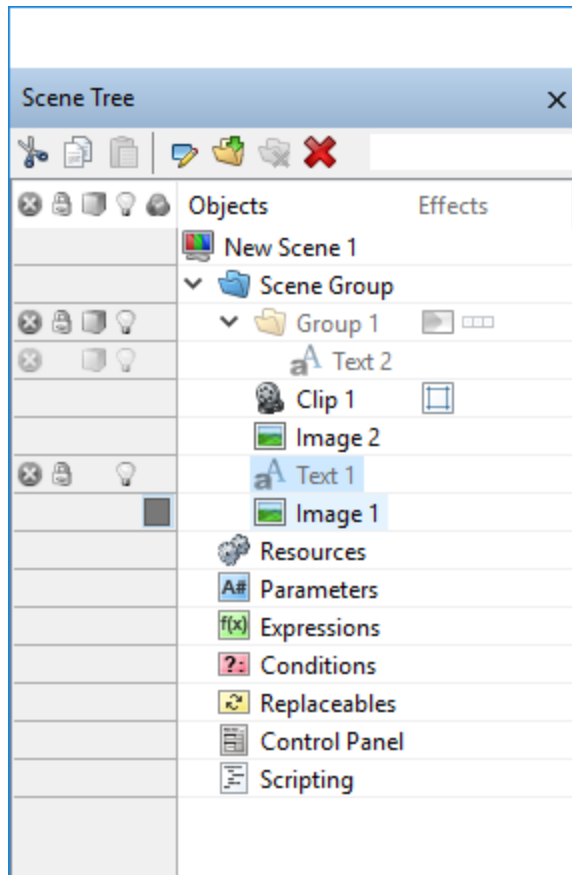


Objects Properties

Each object has properties to the left of the object in the gray section:


- Disabled, Locked
- Locked
- Projection
- Lighting
- Node Color

The Effects Column:

- Allows for the dragging and dropping of **Effects** from the **Toolbox**

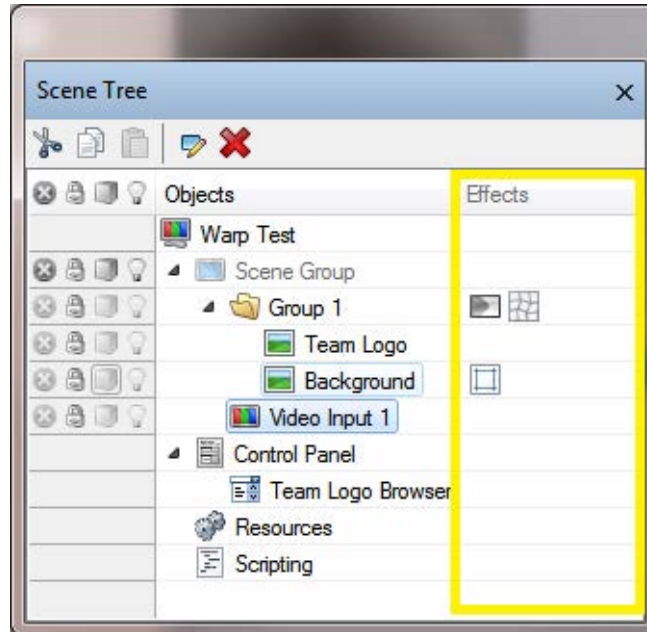

Resources

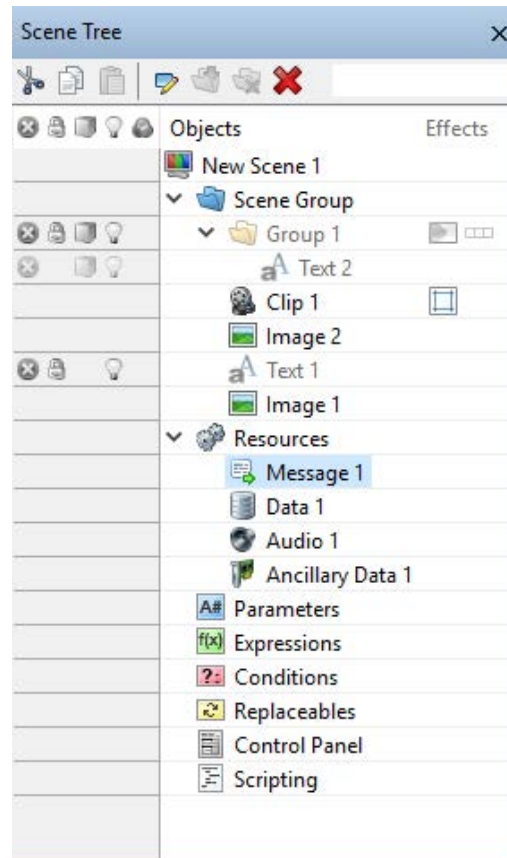

Parameters/Expressions/Conditions/Replaceables:

See the separate sections and documents for descriptions.

Timeline Editor

The timeline editor allows the creation of **Actions**

Actions are groups of **Animations**


Animations consist of **Animation Tracks**.

An “**Animation Track**” is made up of **Track Keyframes**.


Note: “**Transitions**” are individual effects that may be applied to objects. See the “Transitions” section.

Proportional Scaling of the timeline: Select 3 or more keyframes, then hold down the Alt key and drag one

The left-hand column is a list of scene objects that can be animated by creating object animations

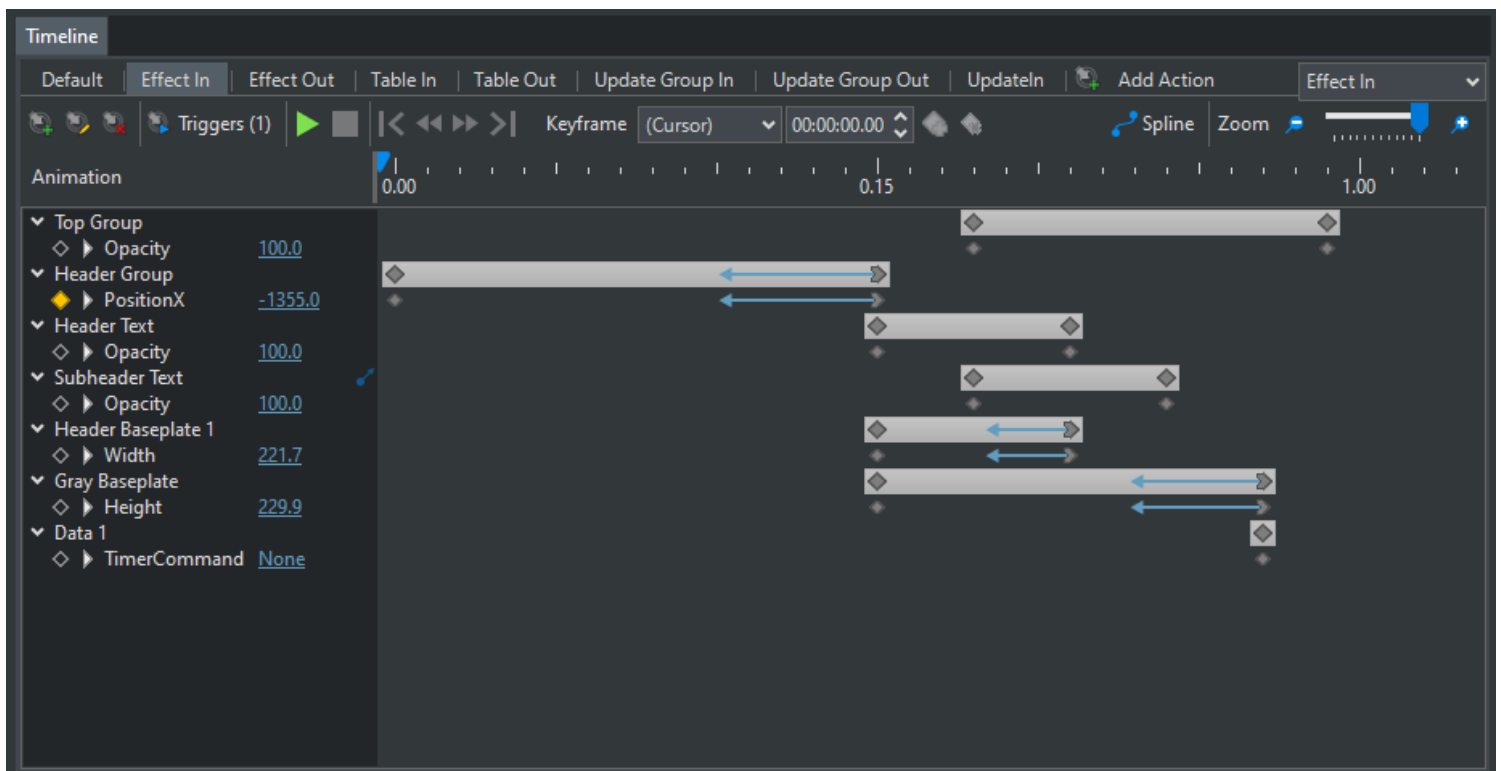

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

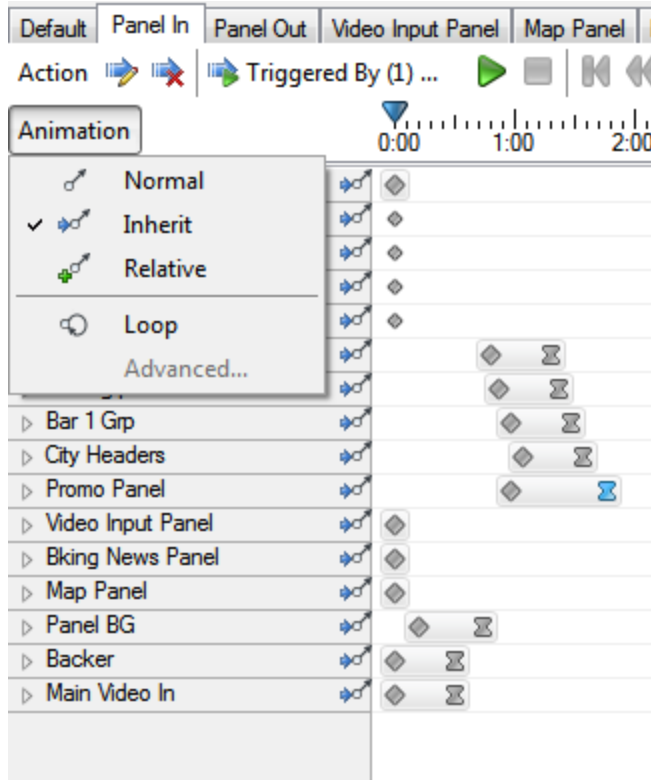

Animation Track Properties

Normal:


Inherit The animation starts from or finishes in the current attribute value. It is like setting the value of the first or last keyframe to the value of the animated attribute at time the animation is started. This comes handy when you want to animate to/from defined state but the current state is unknown. Using this mode minimizes the number of animations you would have to create from all possible states.

Relative: The animation evaluates a number that is added to the current attribute value. Available for before looping only

Loop: Loops the Animation Track

Default Action

There is a setting that determines the behavior of keyframes in the Default action. The Default action will play when the scene is loaded to Preview, and will play on Program only when an Effect In event is not present. Please see the Scene Events section for more information.

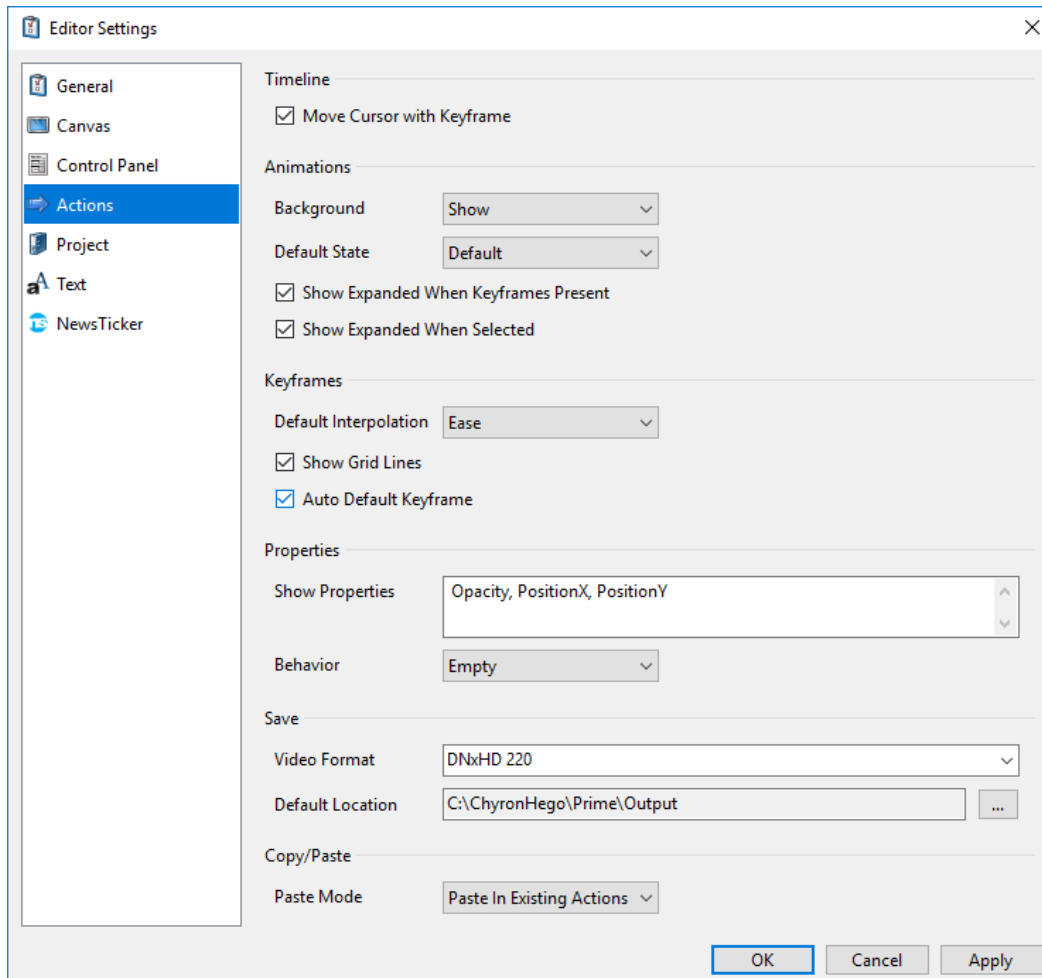


When “Auto Default Keyframe” is checked keyframes will automatically be added to the Default action as keyframes are added in other Actions.

Ex: If I create an action “Dissolve Off” for scene object “Image1”, an opacity keyframe for Image1 will be added to the Default Action.

Set Default Keyframe

“Auto Default Keyframe” only sets the Default keyframe once and is not updated each time the property value is changed in other actions. Users might find it helpful to use “Set Default Keyframe”. This will copy the selected keyframe value and paste it automatically to the Default action. “Set Default Keyframe” is accessible in the context menu by right-clicking on the keyframe.

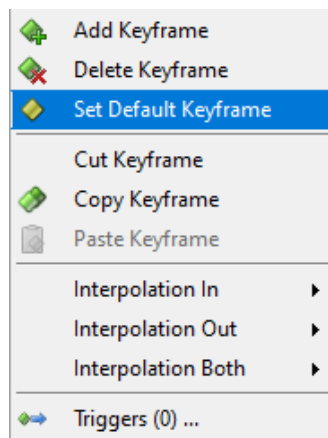


Ex. Continuing with the previous example, if I had accidentally set the opacity keyframe in “Dissolve Off” to 0, the Default action would also be 0. This might provide me with incorrect previews. Instead of copying and pasting the correct value from the “Dissolve Off” action into the “Default” action I could simply right-click on the keyframe in “Dissolve Off” and click “Set Default Keyframe”


When “Auto Default Keyframe” is disabled, at no time will keyframes be automatically added to the Default Action.

Color Coding the Timeline

Select “Node Color” from the Scene Tree

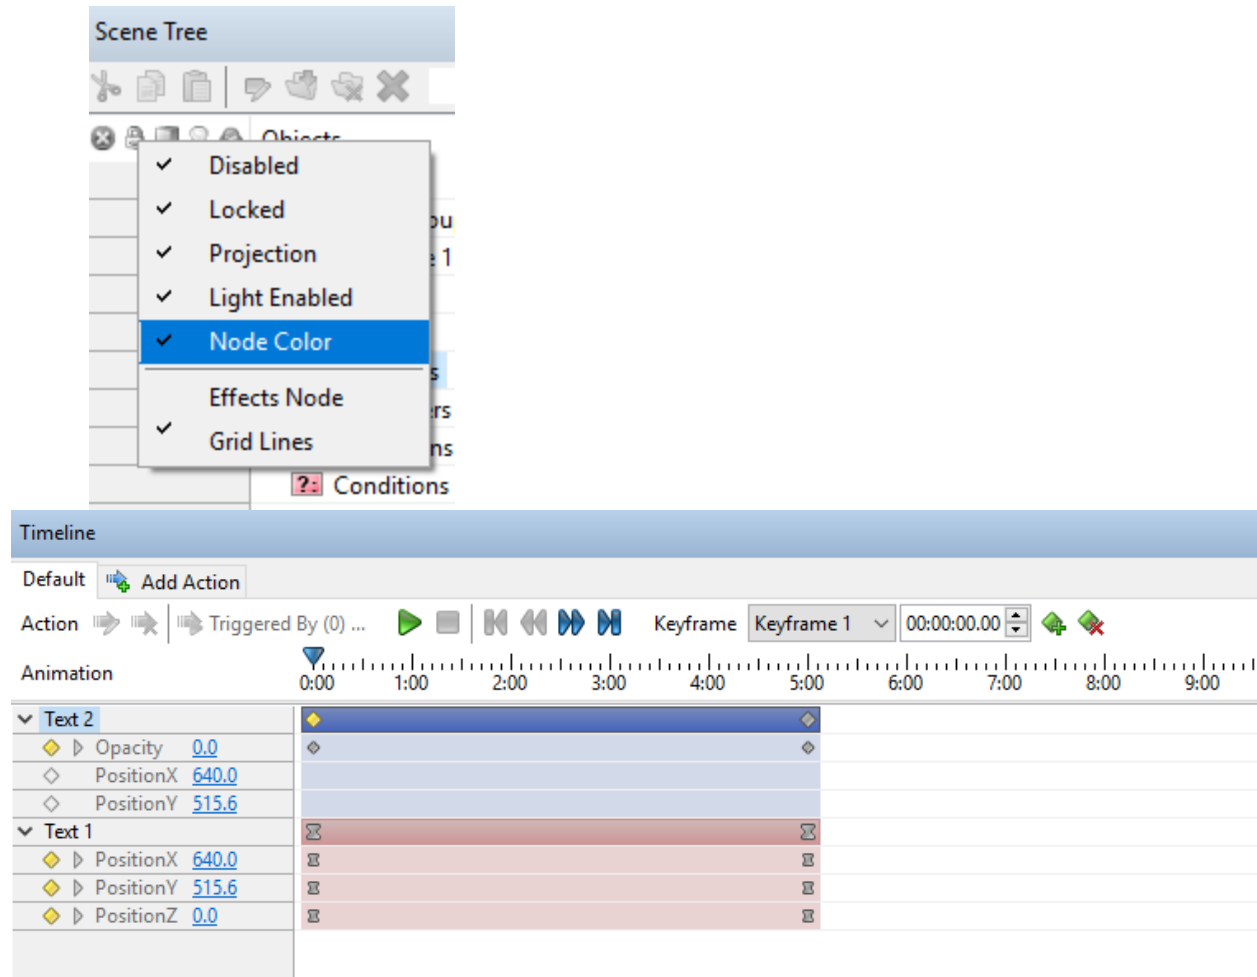

Keyframe Property Values

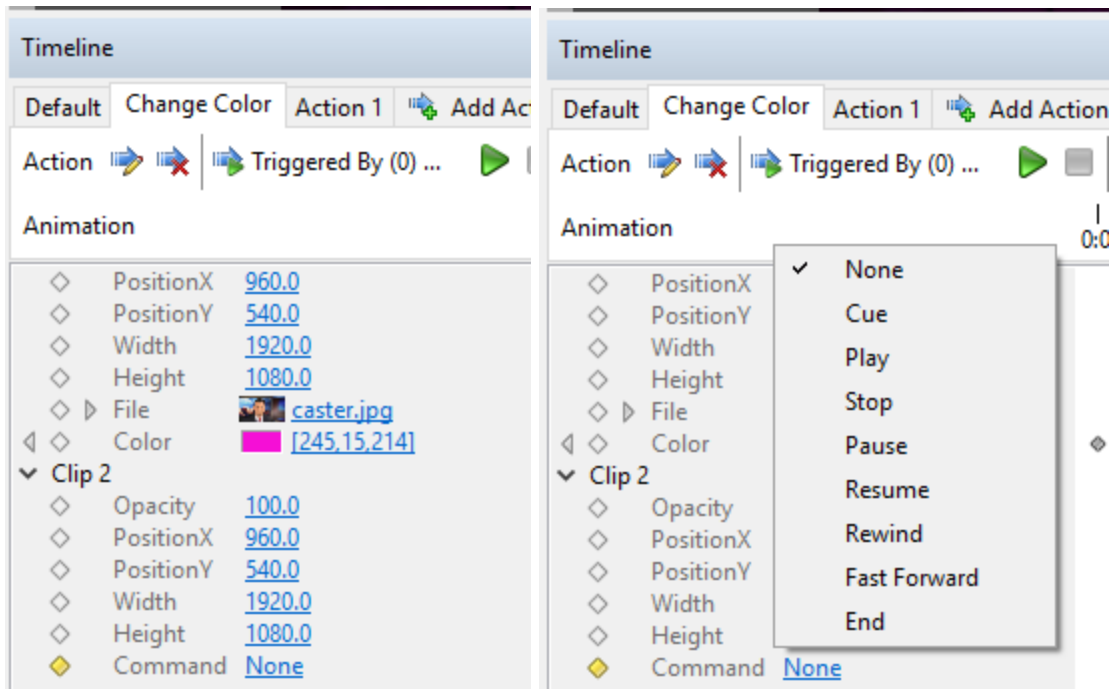

The above screen shots show keyframe navigation per track and applying property value changes from the Timeline editor.


Click on the color chicklet to open the color picker.

Click on the Thumbnail image to change the filename


Click on any Command property to select any command associated with that object

Click on any blue link to modify the objects property value.

Keyframe Interpolations:

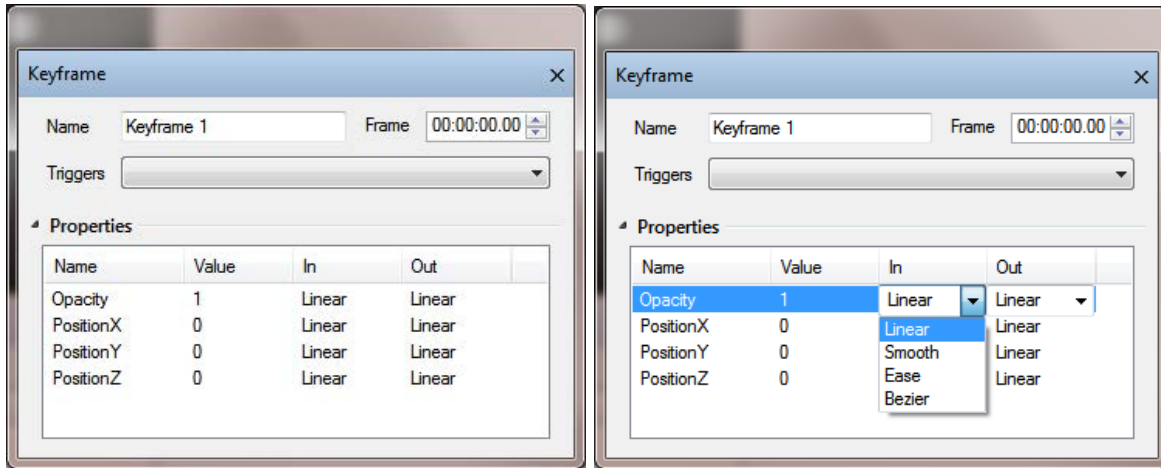


See the “Timeline Triggers” section for executing triggers from the timeline.

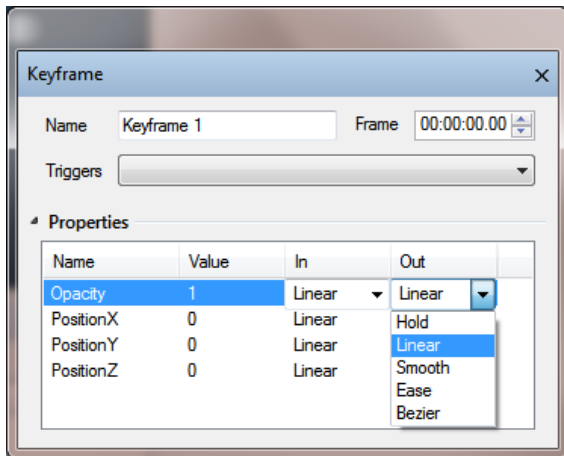


“In” interpolations can be Linear, Smooth, Ease or Bezier


“Out” interpolations can be Hold, Linear, Smooth, Ease or Bezier




Linear: Proportional average between 2 adjacent values. This is the default interpolation unless changed in the settings.




Ease: In and Out tangents are horizontal in the keyframes.



Hold: The value from the previous keyframe is kept until it is redefined by the next keyframe. The only interpolation for attributes with discrete values. This might give some animations a jumping effect, depending on the properties keyframed.



Smooth: In/Out tangents are synced to maintain a smooth continuity of a curve.



Bezier: Similar to the Smooth interpolation, with the distinction that the In/Out tangents are not synced.

NOTE: Clicking a Keyframe in the Timeline Editor with the Ctrl button down will cycle the different Keyframe types.

Keyframe Timeline Ease Editor

Timeline

Default

Action

Animation 0:00 1:00 2:00 3:00

▼ **Image 1**

- ▶ PositionX [43...](#)
- ▶ PositionY [83...](#)
- ▶ PositionZ [0.0](#)

Keyframe

Name Frame

Triggers

▼ **Properties**

Name	Value	In	Out
PositionX	432		Ease 1.87
PositionY	837		Ease 1.87
PositionZ	0		


When a keyframe is set to “Ease” arrows will appear in the User Interface allowing designers to modify the ease values. The same can be achieved in the Keyframe editor by entering the numeric values. The arrows allow for a nicer experience.

Dragging the arrows inward or outward will modify the numeric values in the Keyframe editor.

Default Ease value can be set in “Config->Settings->Action”


Copy/Paste Interpolation

When pasting a copied keyframe, the user can decide to paste the interpolation information only. This means the same smooth motion can be applied to different properties.

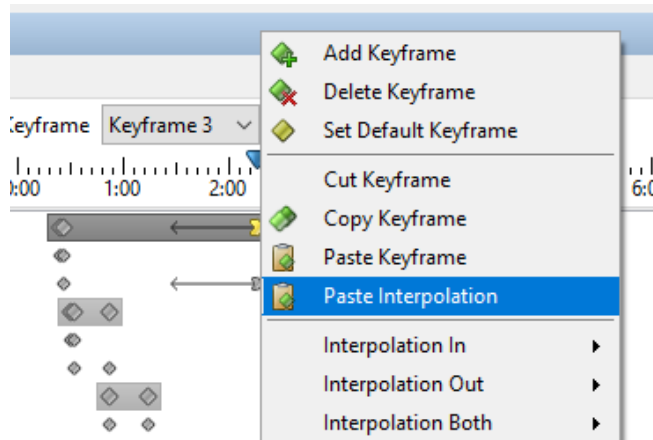

Keyframe Spline Editor


The **Spline Editor** offers users more control over their animations. Click on “**Spline**” to toggle between the **Timeline** view and the **Spline Editor**.

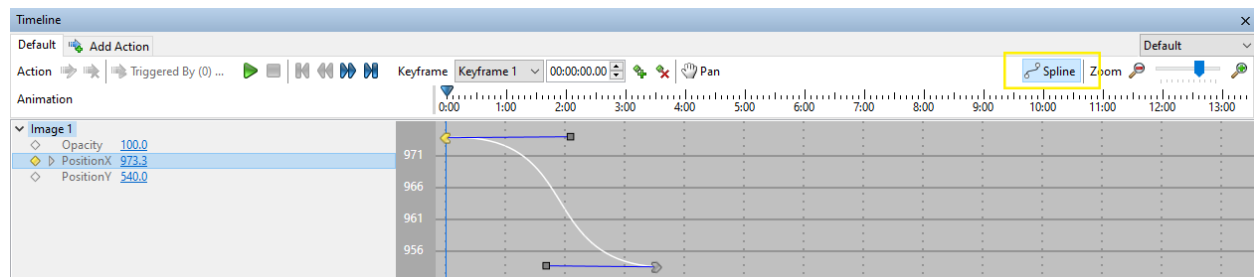

Only one property can be displayed at any given time. To change which property is displayed click in the region to the right of the property values.




Keyframes can be added and removed on the selected property at the selected point on the curve.

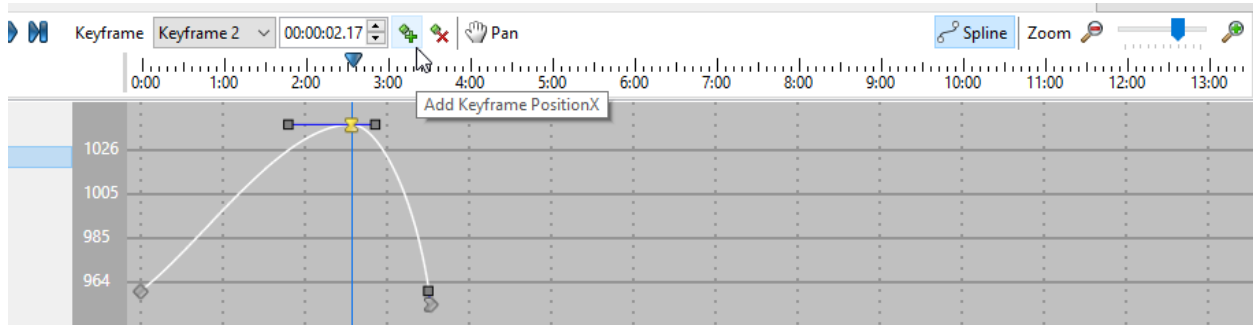

The zoom tool in **Spline Editor** mode only affects the x-axis.



Auto Fit to Height

The y-axis will automatically scale to contain all keyframes in view when Auto Fit Curve to Height is enabled.

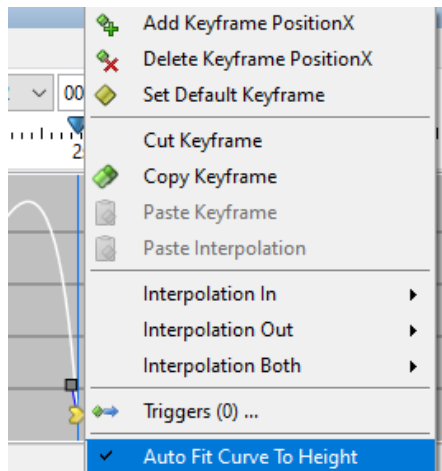

With Auto Fit to Height disabled the curve may appear outside the viewing area.

To **Pan** around the timeline on both the X and Y axis hold the middle mouse toggle wheel down and move the mouse in all directions. Pan mode can also be entered by clicking the pan icon.

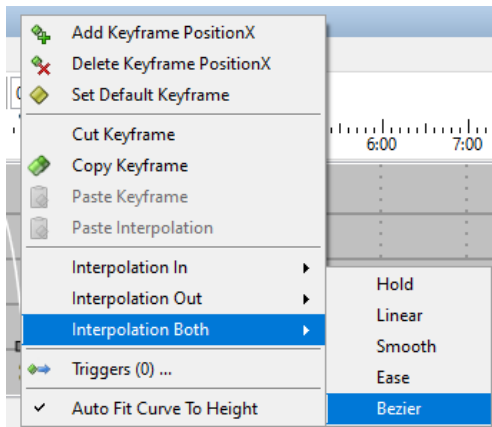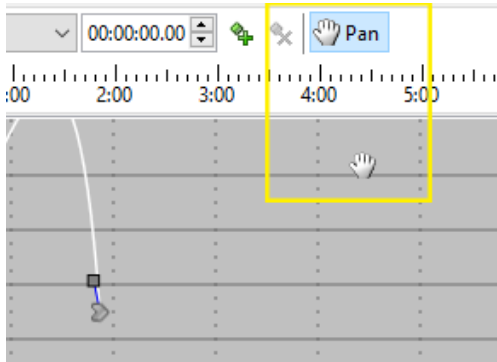

Interpolation

Interpolation modes are accessed via the context menu by right-clicking on the keyframe

Interpolation Both: Sets both the In and Out interpolation of the keyframe.


Interpolation In: Sets only the In interpolation of the keyframe

Interpolation Out: Sets only the Out interpolation of the keyframe

Triggers

The event driven model of PRIME allows users to trigger methods of any scene object. The “Triggers List” lists all objects that have commands. These commands may be triggered from any event within the scene, including a Keyframe event in the timeline. The trigger list is also available to the Control Panel controls. The trigger list is available from any “Event” list.

Trigger List

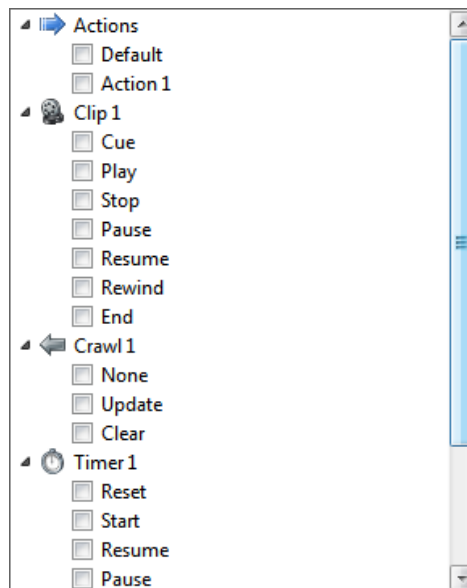


Triggered by List


In the event driven model sometimes it’s difficult to determine which event triggered the condition, Action, script or any other trigger. PRIME has a “Triggered” by list that will show you what events will trigger your Condition, Action or Script or any other Trigger.

Usually the Lighting Bolt icon on a tool bar will open the “Triggered By” list to show you what will be the trigger.


For example, in the “Condition” Editor:

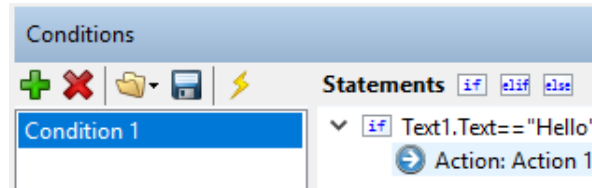

Clicking on the Lightning bolt will bring up the “Triggered By” dialog showing what event will trigger “Condition1” in this example: In this example it shows that the “Text1 TextChanged” event is the event that will trigger “Condition1”. Multiple events could hooked up to the same trigger.

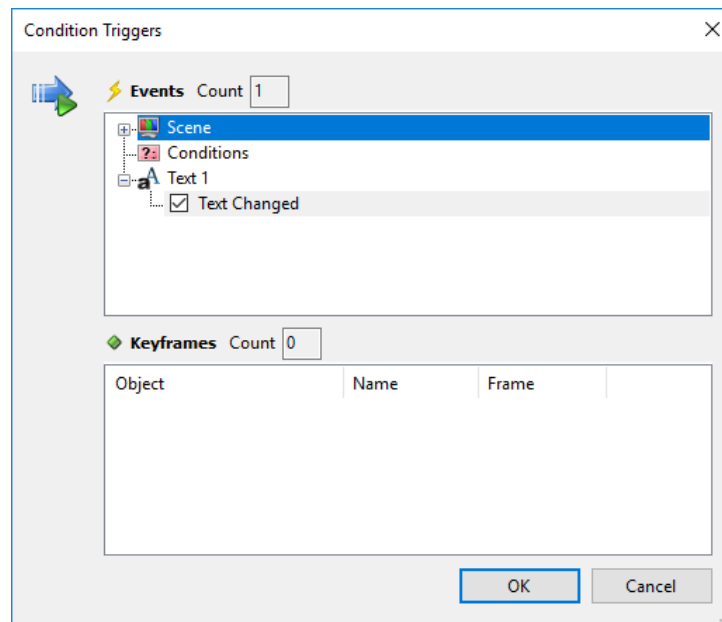


For Timeline Actions there is a “Triggered by” button. The label also shows the number of events that could trigger the Action:

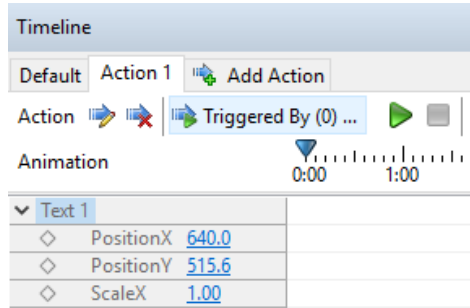

Timeline Triggers

Triggers can be applied to the Scene Group, Scene Objects and Resources via the Properties Pane.


To add a Trigger to a scene object, first add a keyframe to the timeline then select a Trigger or multiple Triggers from the Triggers list in the Keyframe Properties.

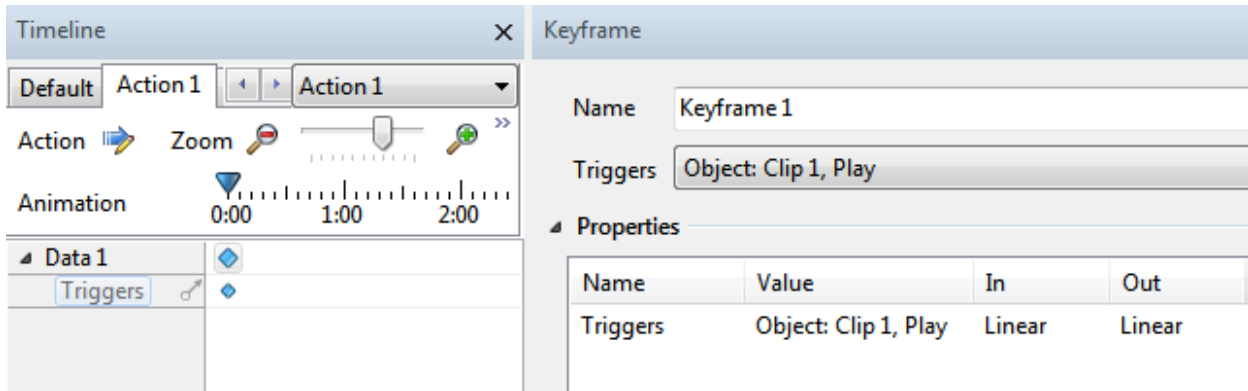

To add Triggers to the Scene Group use the command sequence in the properties pane.


Timeline triggers can not be added to Expressions, Parameters Conditions and Replaceables

Control Panel Triggers

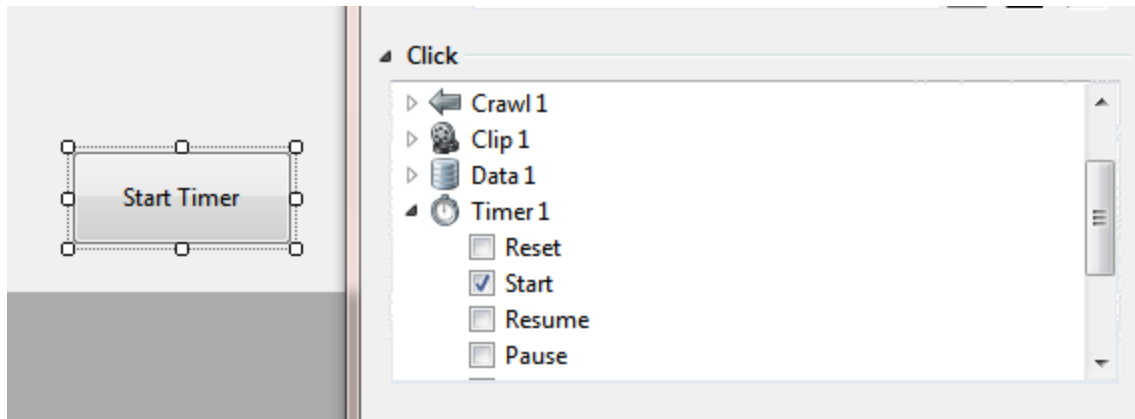

Triggering C# Scripts

C# Script functions can be triggered from the “Triggers List”

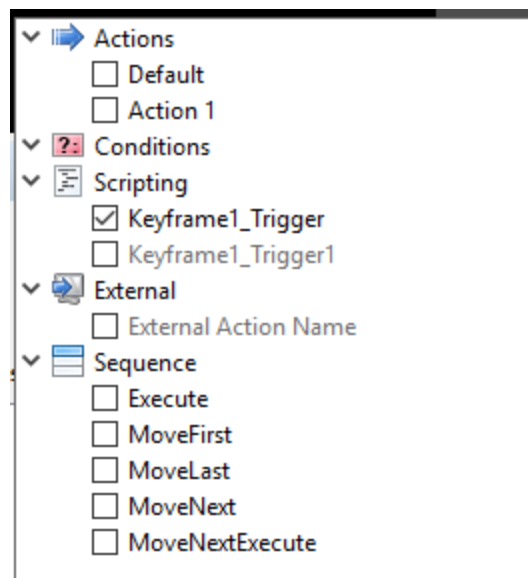

Application Logic

Application Logic is a scene that functions on application level.


Create a new or edit an existing Application Logic scene. Consider Application logic as a new scene that gets created by PRIME at startup and runs continuously while the PRIME application is running. There are a limited amount of scene resources available such as GPI out, PRIME Switcher and XKeys. Parameters, Conditions and expressions are available as well. The parameters defined here have a scope beyond Scene and Project parameters. Parameters defined here are available to all scenes in all projects.

Application Logic Scene

When Prime is started, Application Logic Scene is loaded with all the events, conditions and resources inside it. Prime creates an empty Application Logic Scene by default called "Default.pal" and stores it in Prime\Settings\Logic folder.

This scene can be viewed and edited in Editor through File -> Application Logic -> **Edit Application Logic**. The user can also create a new Application Logic Scene through File -> Application Logic -> **New Application Logic**.

Application Logic scene currently supports **Data, GPI In, GPI Out, Hot Key, Java Script, Keyboard Bank, Message, Switcher, Table, and X-Keys** resources.

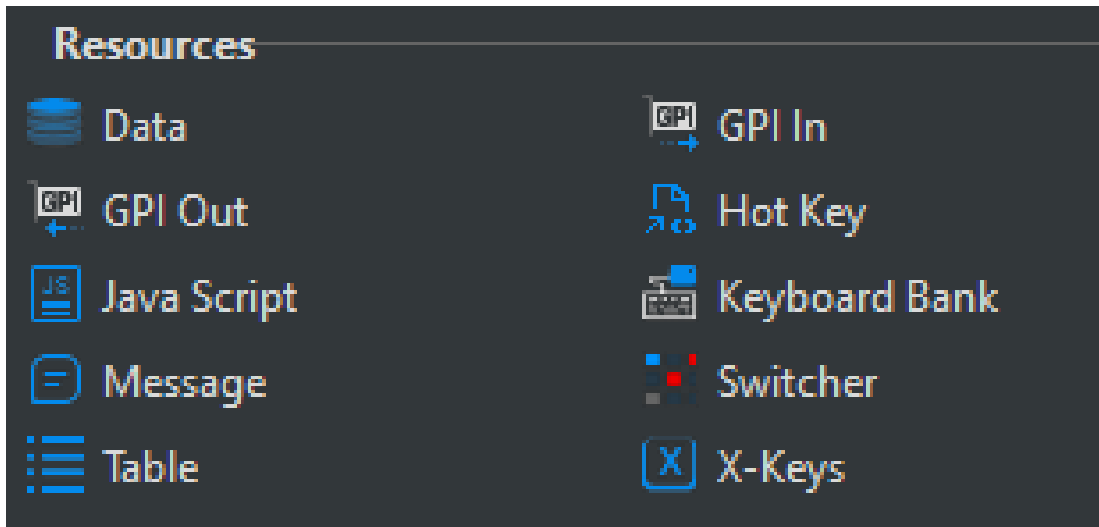


Resources supported by Application Logic


These resources can be used the same way they are used in a project scene. There are numerous scenarios this scene will enhance the experience of designing and working with Prime.

Examples of use cases:

Data object is created to evaluate conditions stored in Application Logic Scene.

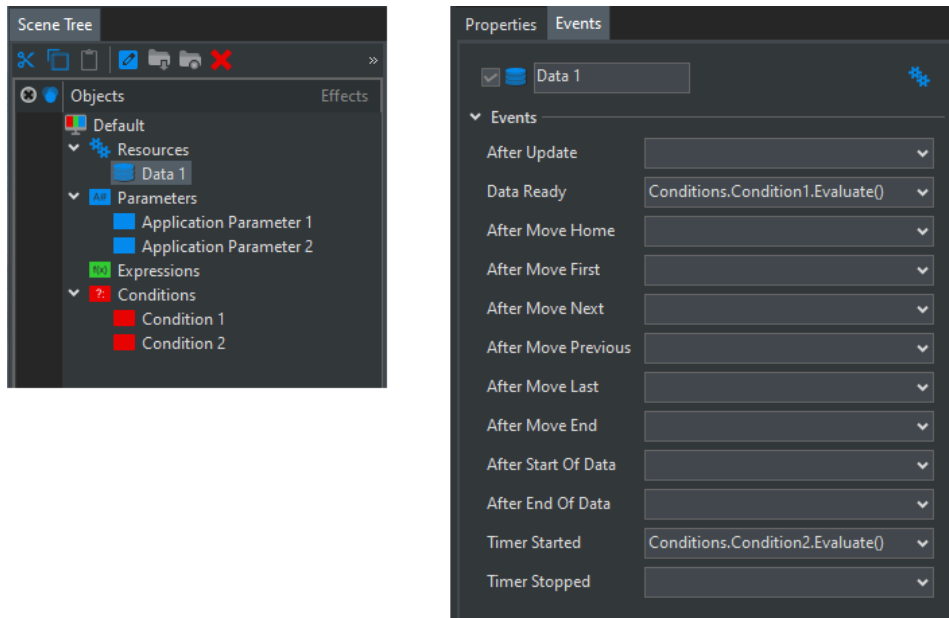

This example shows a data object, which is used to evaluate conditions to modify application parameters.

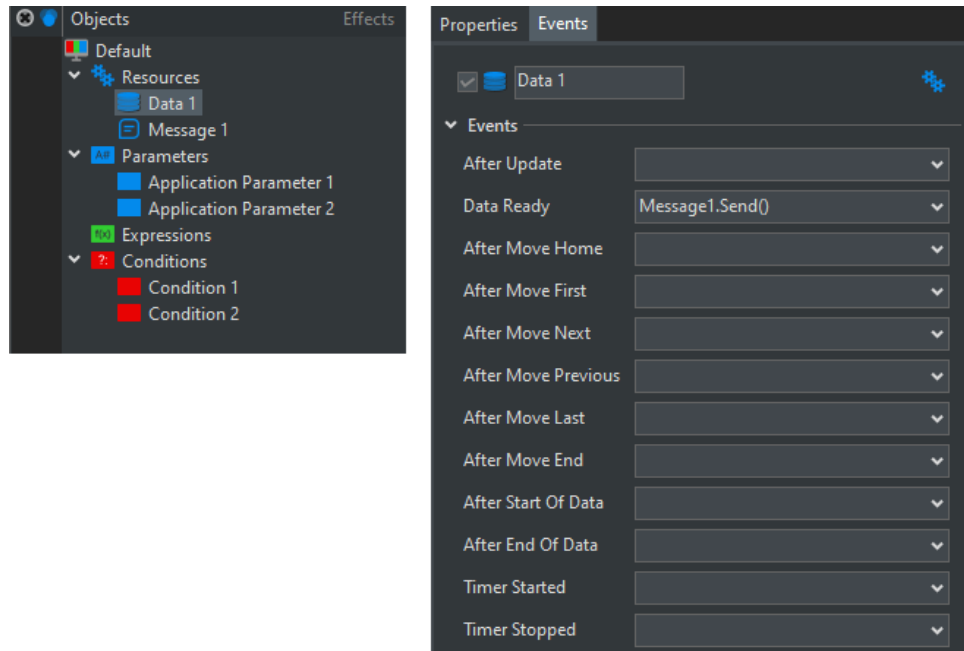

In this example Data 1 object loads its content from data source and fires Data Ready event, which can be used to send a message stored in Message1 object

External Activations

External Activations are functions that activate Actions and or Conditions in other scenes on output.

- Actions
 - Default
 - Action 1
- Conditions
- Scripting
 - Keyframe1_Trigger
 - Keyframe1_Trigger1
- External
 - External Action Name
 - BugScene.Squeezeback
 - Squeezeback
- Sequence
 - Execute
 - MoveFirst
 - MoveLast
 - MoveNext
 - MoveNextExecute

There are four possible arguments:

<ChannelIndex> is a number describing a channel (one-based so the first output channel is 1).

<ChannelName> is the text name of a output channel.

<SceneName> is the text name of a scene

<ActionName> is the text name of an action

All of these arguments support a wildcard (asterisk) in the following manner:

- *
This will match anything. So * could match any channel, any scene or any action depending on which argument it is utilized for.
- *Text
This will match any value that ends in "Text"
- Text*
This will match any value that starts with "Text"
- *Text*
This will match any value that contains "Text" somewhere other than the start or end.

You cannot use the wildcard like this:

- *Text1*Text2*

Supported External Activation Usage for Actions or Conditions:

- **ActionName**
This will match any action with the provided name regardless of which scene contains it; only scenes on the same channel as the scene causing this trigger will be affected. This is consistent with the original External Activation implementation.
- **SceneName.ActionName**
This will match any action with the provided name in a specific scene, but only on the same channel as the scene causing this trigger. This is also consistent with the original External Activation implementation.
- **ChannelIndex.SceneName.ActionName**
This will match any action with the provided name in the designated scene, but only on the channel indicated by the provided index.
- **ChannelName.SceneName.ActionName**
This will match any action with the provided name in the designated scene, but only on the channel indicated by the provided name.

The same format exists to execute Conditions:

ConditionName
Scene.ConditionName
Channel.Scene.ConditionName

Actual Usage Examples:

Imagine the following scenario.


- Two output channels: "Output1" and "Output2"
- Two scenes: "FirstNames" and "LastNames"
 - FirstNames has an action named "SlideOn" and "SlideOff"
 - LastNames has an action named "DissolveOn" and "DissolveOff"
- Play both scenes to both outputs

Now for crazy examples:

- **SlideOn**
If triggered from a scene on Output1, this will play action FirstNames.SlideOn.
If triggered from a scene on Output2, no actions will be played.
- **FirstNames.SlideOn**
If triggered from a scene on Output1, this will play action FirstNames.SlideOn
If triggered from a scene on Output 2, no actions will be played.
- ***.*On**
If triggered from a scene on Output1, this will play action FirstNames.SlideOn and LastNames.DissolveOn.
If triggered from a scene on Output 2, no actions will be played.
- **1.FirstNames.SlideOn**
Regardless of which scene activated this trigger, this will play action FirstNames.SlideOn on Output1.
- **2.LastNames.DissolveOn**
Regardless of which scene activated this trigger, this will play action LastNames.DissolveOn on Output2.
- **2.*.*On**
Regardless of which scene activated this trigger, this will play FirstNames.SlideOn and LastNames.DissolveOn on Output2.

- ***.FirstNames.SlideOn**
Regardless of which scene activated this trigger, this will play FirstNames.SlideOn on both Output1 and Output2.
- ***.*.*On**
Regardless of which scene activated this trigger, this will play actions FirstNames.SlideOn, LastNames.DissolveOn on Output1 and FirstNames.SlideOn, LastNames.DissolveOn on Output2.
- **Output2.FirstNames.SlideOn**
Regardless of which scene activated this trigger, this will play FirstNames.SlideOn on Output2.
- **Output*.FirstNames.SlideOn**
Regardless of which scene activated this trigger, this will play FirstNames.SlideOn on both Output1 and Output2.

Bindings View

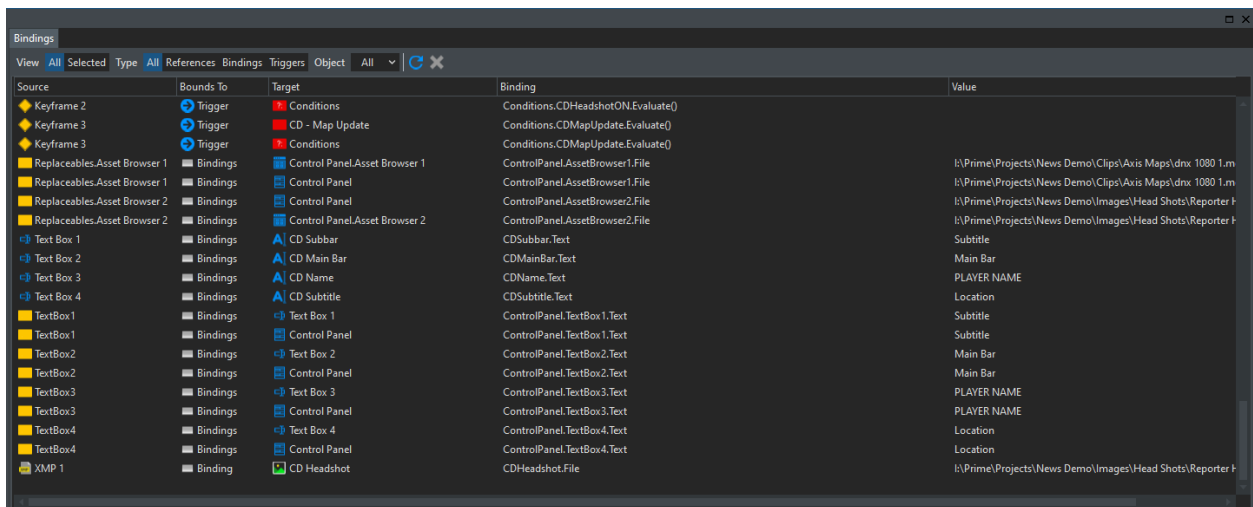

The Bindings view is a great tool for users to understand and visualize how properties within a scene are bound to events. This is a great diagnostic tool.

In the above example the first item reads:

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

Keyframe 2 references a condition named “CDHeadshotOne”.

Source: The Object that has a binding

Bound To: The location of the source object binding

Target: The target object that is referenced by the binding

Binding: The target object the source is bound to.


Value: The current value of the property

Events


Events are the foundation of PRIME. Almost everything in a scene, meaning all objects, may raise an event when any of their properties are changed. Most objects have events. Users may “Hook Up” any “Trigger” (Above) to any event that gets raised within a scene.

Every Object will have an Event tab. Listed there will be commonly used events in combo boxes. There will also be a list view to add as many events as the object has to offer.


Below is the “Property Changed” section of every Event page.

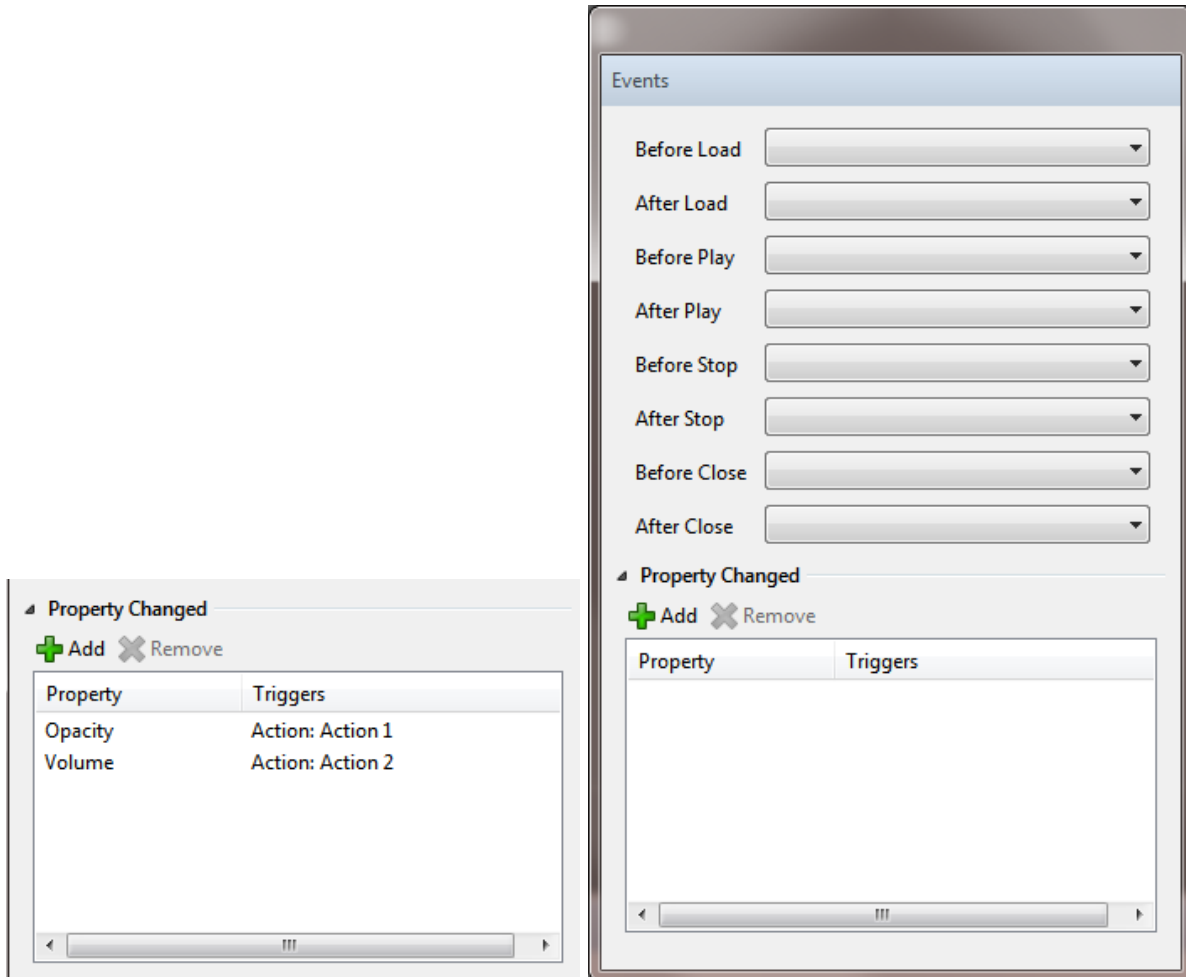

The following example shows the events available to a Clip Object that trigger any item(s) in the Triggers list.

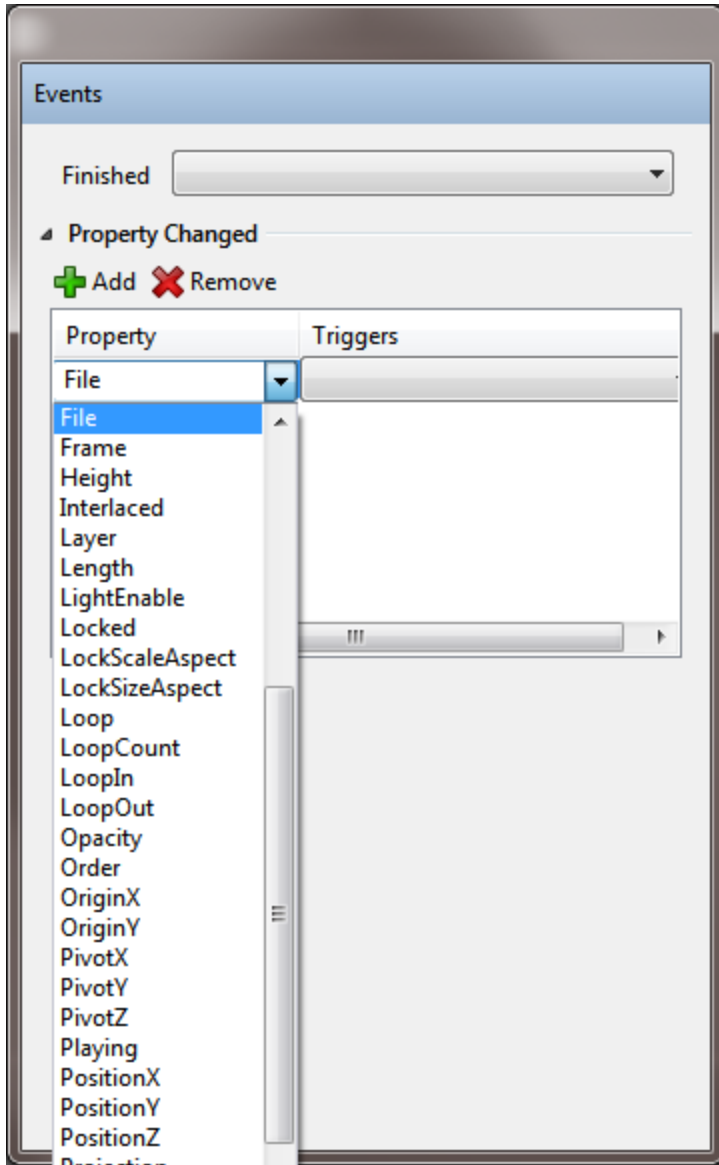


In this example, if the opacity changes it will trigger Action1. If the Volume property changes, it will trigger Action 2.

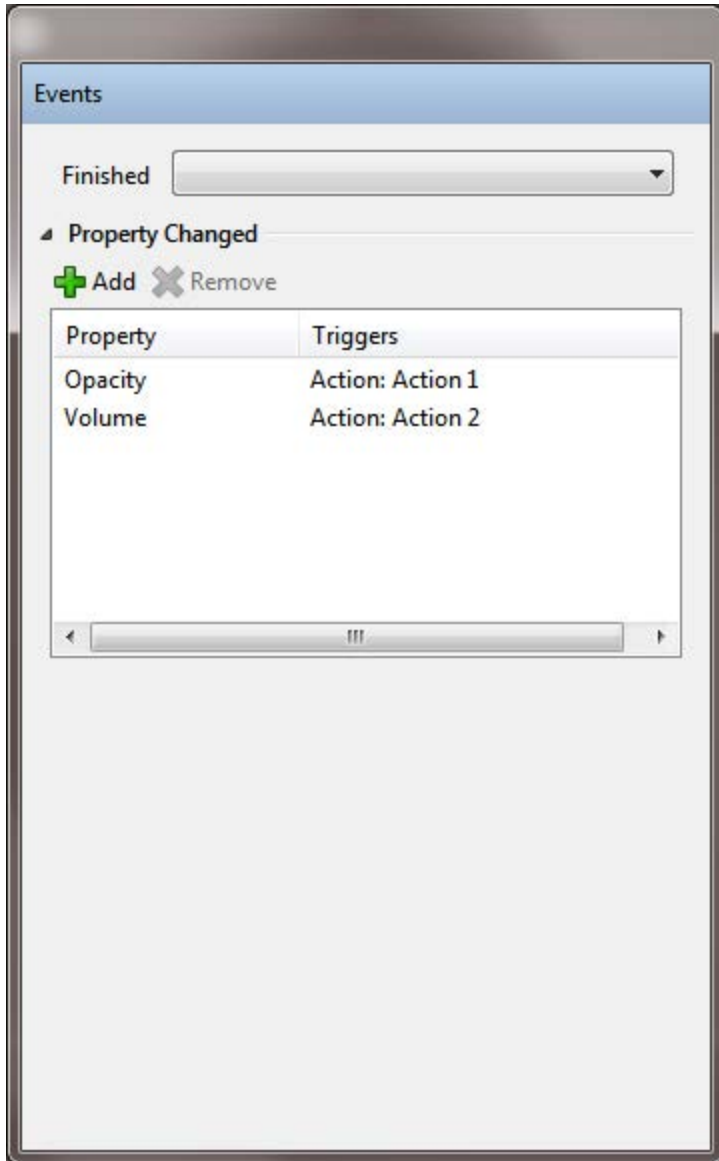

Parameters Editor

The parameters editor allows you to create, modify and delete parameters. Parameters are considered as storage locations for data. The scope of a parameters availability is either to all scenes in a Project or for the individual scene only.

Parameters, Expressions & Conditions are documented in the [PRIME Parameters, Expressions & Conditions](#)

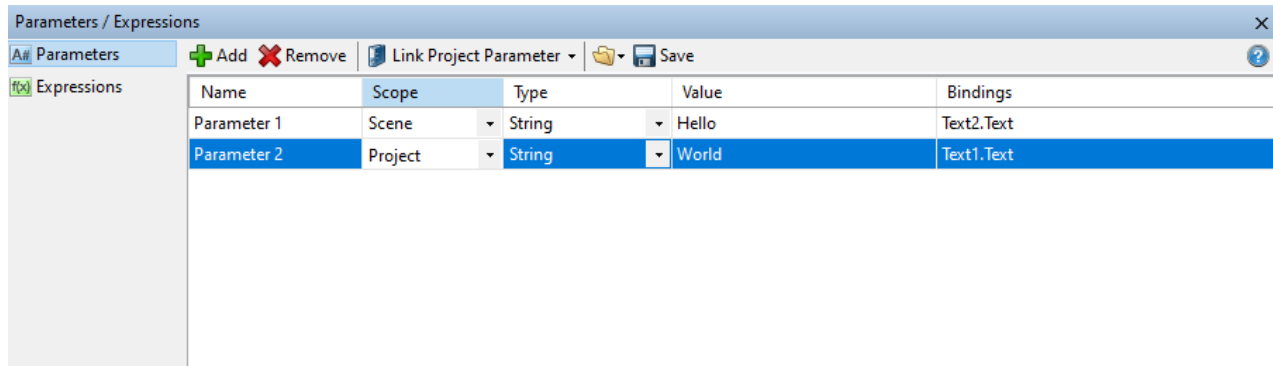

Parameters are useful for binding scene objects properties. To bind any Object Property to a parameter:


1. Drag and drop the Object into the **Binding** column.

OR

2. Drag from the **Scene Tree** as in the example above. By dragging Text1 from the **Scene Tree** into the parameters **Binding** column, the default property of the Text1 object is its "Text" property. The binding is shown as "SceneName.ObjectName.ObjectProperty".

Expressions Editor

Parameters, Expressions & Conditions are documented in the [PRIME Parameters, Expressions & Conditions](#)

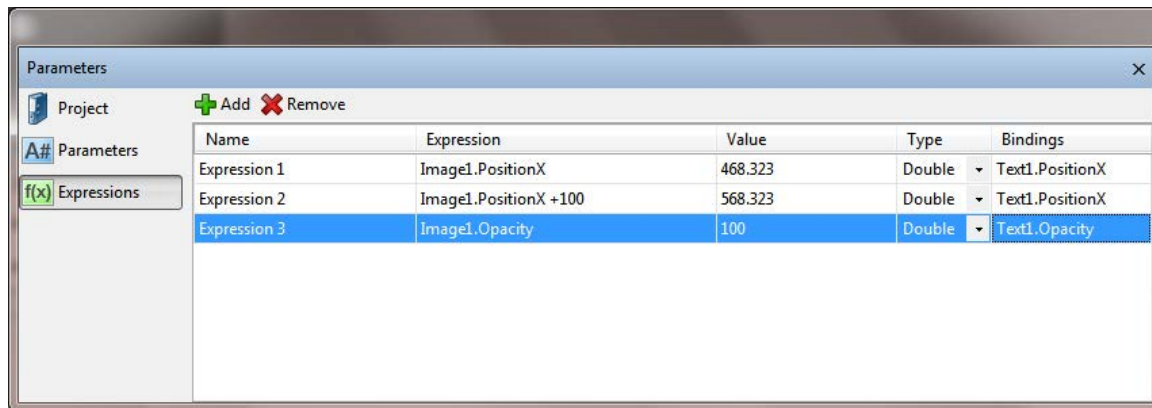

Expressions may be inserted into any binding that accepts a string of text.

Expression Samples:

- Set X position of one object to another:

Type	Expression	Bindings
Double	Image1.PositionX	Text1.PositionX

- Set X position of one object to another plus an offset:

Type	Expression	Bindings
Double	Image1.PositionX + 100	Text1.PositionX

- Set Opacity of one object to another times a scale value:

Type	Expression	Bindings
Double	Image1.Opacity * .5	Text1.Opacity


- Set File of one object to the modified Text of another:

Type	Expression	Bindings
String	"I:\Graphics\" + Text1.Text + ".png"	Image1.File

Scene Control Panel

To add a Scene Control panel to a scene or base scene:

1. Navigate to Toolbox > Resources > Control Panel
2. Single click Control panel resource

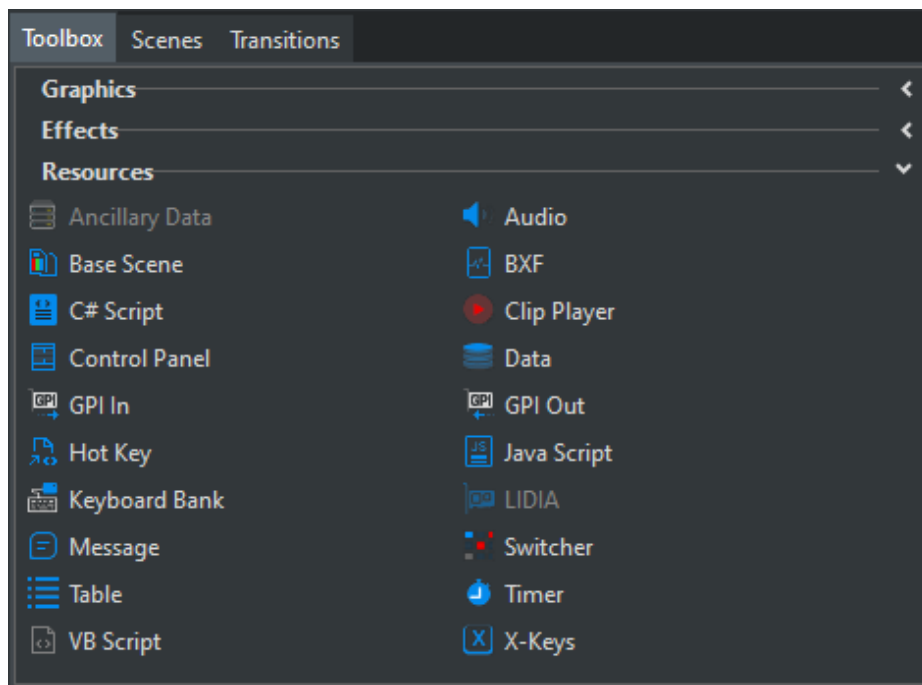


A single control panel resource can be added to each individual scene or base scene. Only one control panel is permitted per scene.

To access the Scene Control panel:

1. Navigate to View > Control Panel


The Scene Control panel allows users to design their own panel and bind the Control Panel Objects to Scene Objects. These controls are native .NET controls with a full array of properties and events. These events are bound to the C# scripting editor. The events are viewed by clicking the lightning bolt in the Control Panel Properties panel.

A simple way to bind objects is to drag and drop existing Actions from the timeline, or drag and drop existing Scene Objects from the Scene Tree to the Control Panel. This will automatically add and bind these to the Control Panel Control.

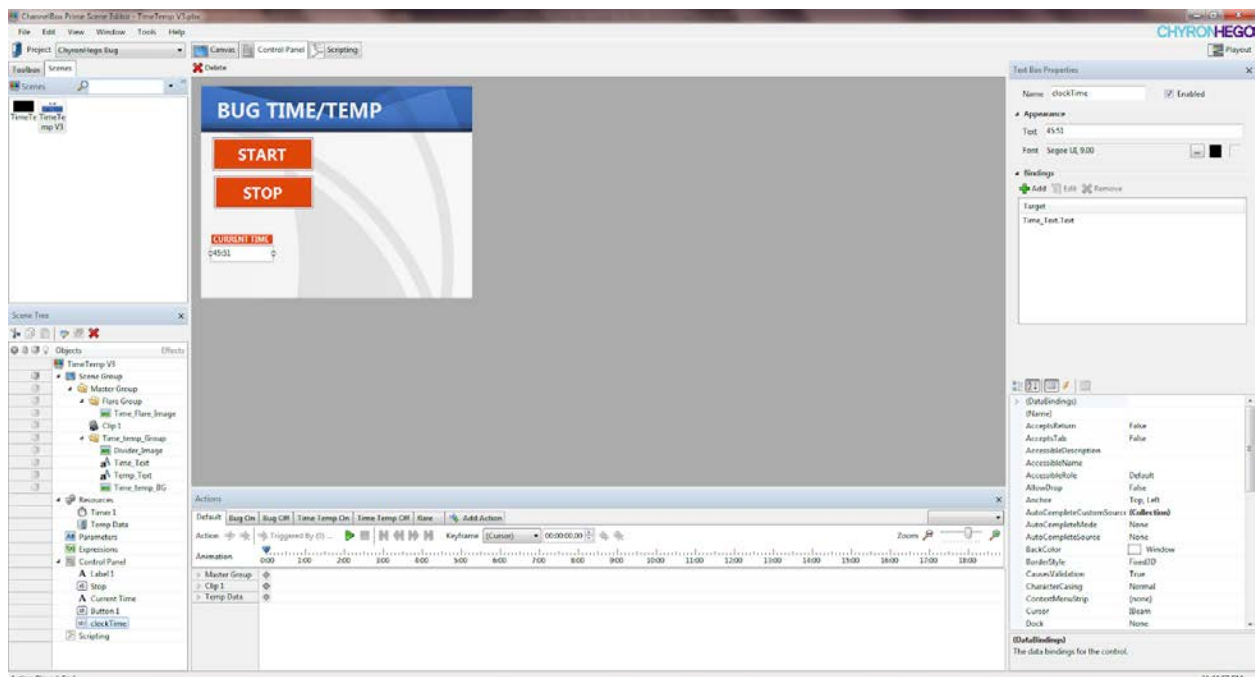


FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)


Control panel Controls have their own set of bindings

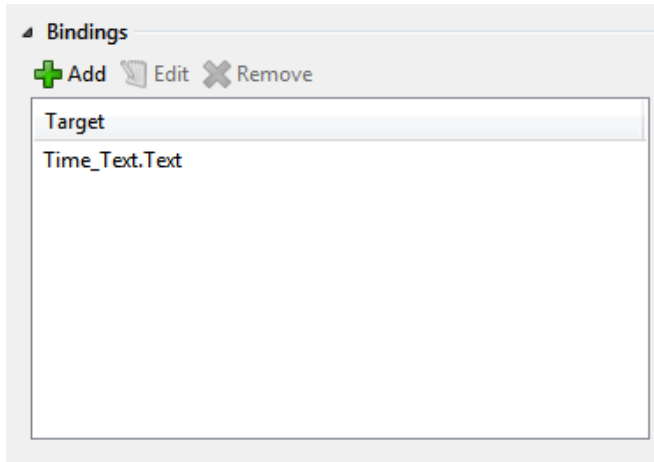


Control Panels have their own set of Properties

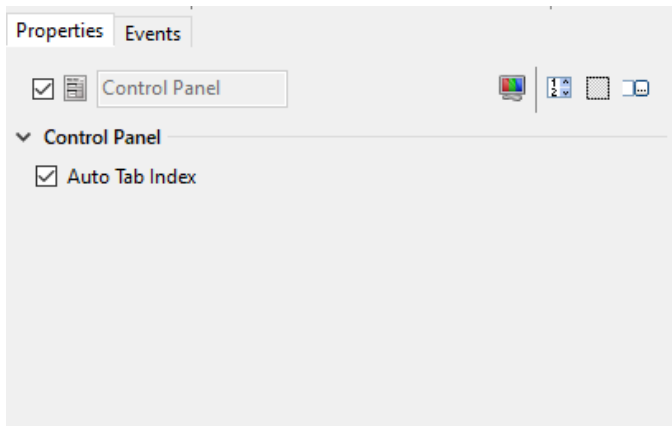


Auto Tab Index - sets the tabbing order for items on the control panel based on their position. The tab order is set automatically from left to right and top to bottom. To set a custom Tab Index uncheck this option and set the Tab Index using the advanced properties.

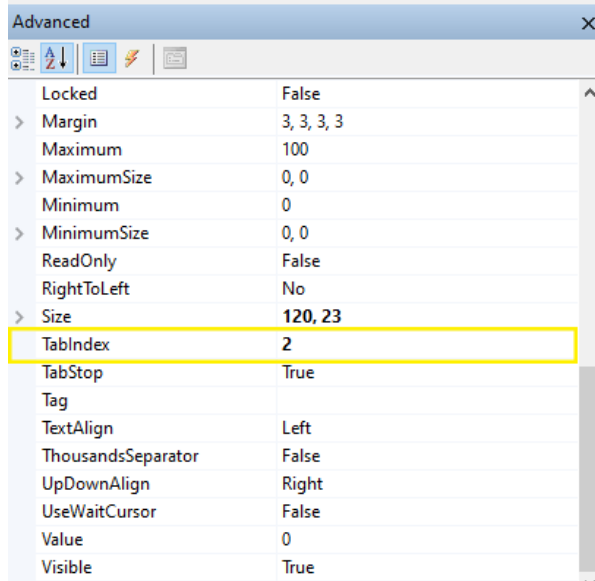

Selecting the lightning bolt will show all the events for the control:

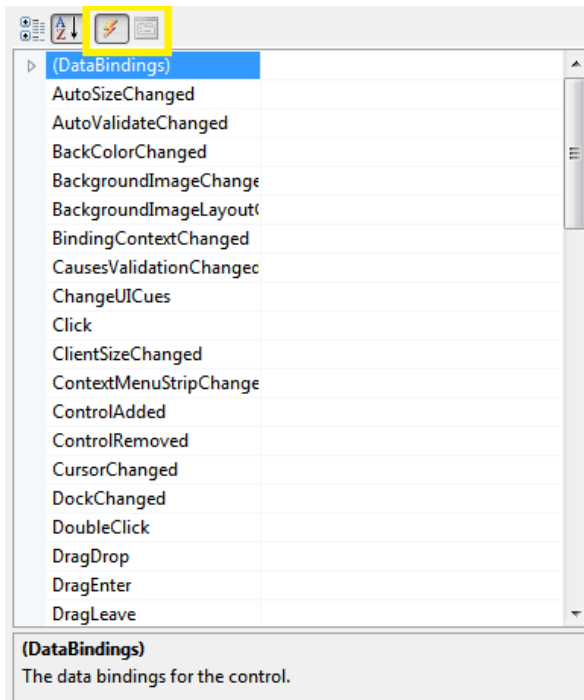

Double clicking on the desired event (“Click” event in this example) will show the event in the C# code editor:

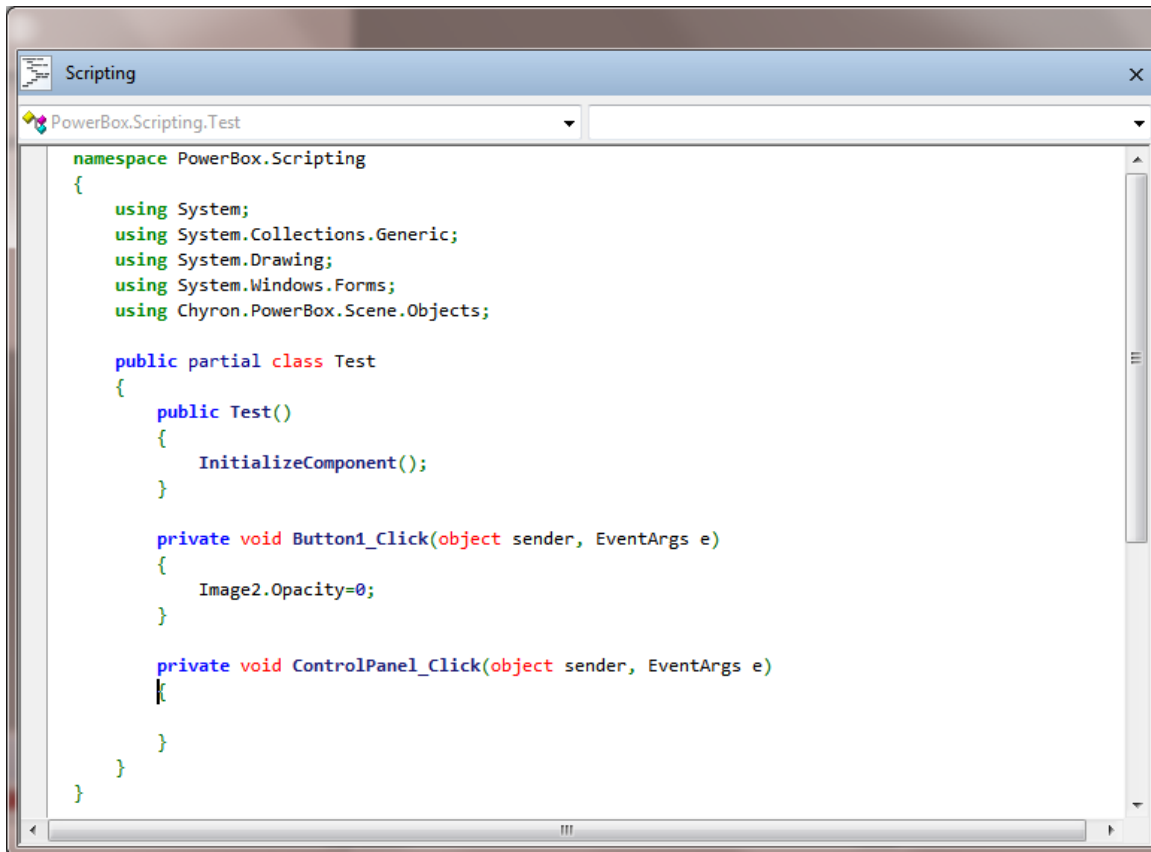

```
namespace PowerBox.Scripting
{
    using System;
    using System.Collections.Generic;
    using System.Drawing;
    using System.Windows.Forms;
    using Chyron.PowerBox.Scene.Objects;


    public partial class Test
    {
        public Test()
        {
            InitializeComponent();
        }

        private void Button1_Click(object sender, EventArgs e)
        {
            Image2.Opacity=0;
        }

        private void ControlPanel_Click(object sender, EventArgs e)
        {
        }
    }
}
```


Shortcut Keys

PRIME has a Shortcut key manager for both play out and design

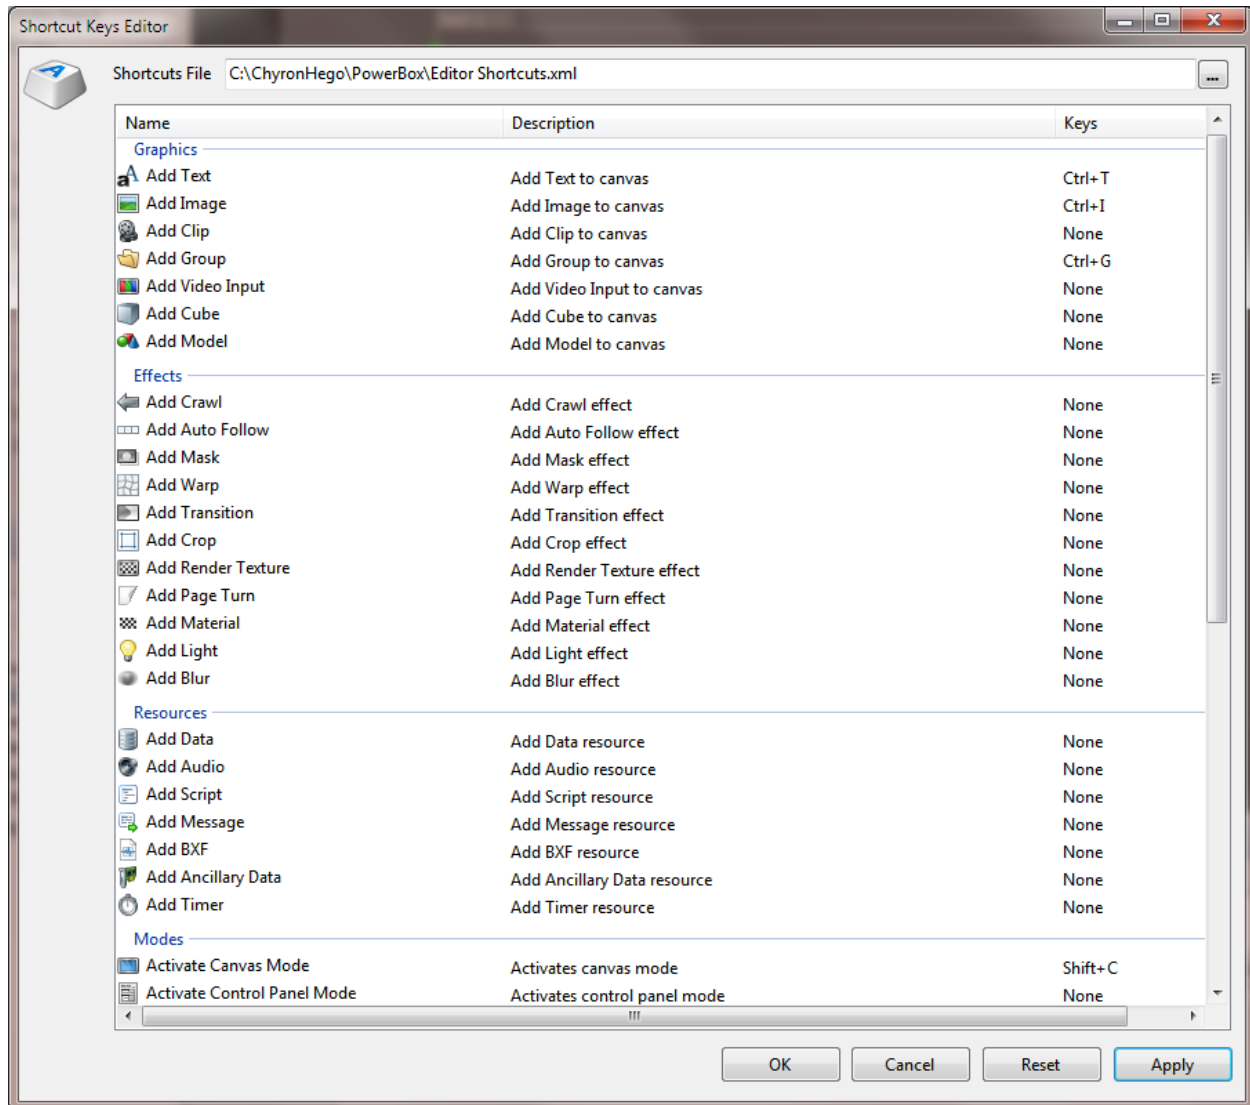

To assign a shortcut key select an item from the list, place your cursor in the “Keys” column and begin to press the keys on your keyboard you wish to have as the shortcut.

As the application grows the list of available functions will appear in the “Name” column.

Parameters, Expression & Conditions

Parameters, Expressions & Conditions are documented in the

“PRIME Parameters, Expressions & Conditions.pdf” file located in the PRIME Documents folder.

[*PRIME_Parameters_Expressions_Conditions.pdf*](#)

Replaceables

ID	Description	Value	Bindings	Character Limit
1	Promotion Night 1 Text	Value 1	PromotionNight1.Text	
2	Start Time 1 Text	1:05	StartTime1.Text	
3	Matchup 1 Text	Rangers	Matchup1.Text	
4	Date 1 Text	Thursday	Date1.Text	
	Promotion Night 2 Text	Value 2	PromotionNight2.Text	
5	Image1 File		HeadshotFile.File	
6	Start Time 2 Text	7:30	StartTime2.Text	

Any and all properties can be set to be able to have its property value changed via automation or CAMIO using the “Replaceables” table.

- Reorder- Drag and Drop Replaceables to reorder
- Order- Used to fulfill data from the Intelligent Interface “W” command. To disable II for a replaceable object click on the numeric value. Disabling II on a replaceable will automatically renumber the replaceables list order.
- Auto Erase - Used to erase the default value. Used mainly for LUCI/CAMIO
- External Updates- Used for Intelligent Interface “X”-“R” command set.
- Databound - Enable any replaceable object that is getting updated from another object like dataobject, parameters, XMP.
- Show/Hide Replaceable - Used to show or hide a replaceable object from Playout’s Replaceable Panel and Edit Scene Messages
- ID - Alphanumeric updateable field


FOR MORE INFORMATION ABOUT CHYRON VISIT:

[HTTP://CHYRON.COM](http://chyron.com)

- Description - Alphanumeric updateable field. In LUCI/CAMIO Description will be the object name visible to producers in the LUCI NRCS plugin.
- Value - Updateable field for object's value
- Bindings - Objects that the replaceable is directly bound to.
- Character Limit - Limits the number of characters allowed for text objects. This is applied in LUCI/CAMIO.

By default, All replaceables added to a scene will be visible in the replaceables panel in Prime Layout. You can choose not to have certain replaceables visible by utilizing the new Hide/Show Replaceable menu introduced in PRIME 4.9.0

Base Scene replaceables will not be visible automatically in the replaceables panel. Manually add the base scene binding object to the parent scene replaceables (preferred option) or add the base scene replaceable to the parent scene replaceable. You must enable databound on any base scene replaceable object, you intend to add to a parent scene's replaceables.

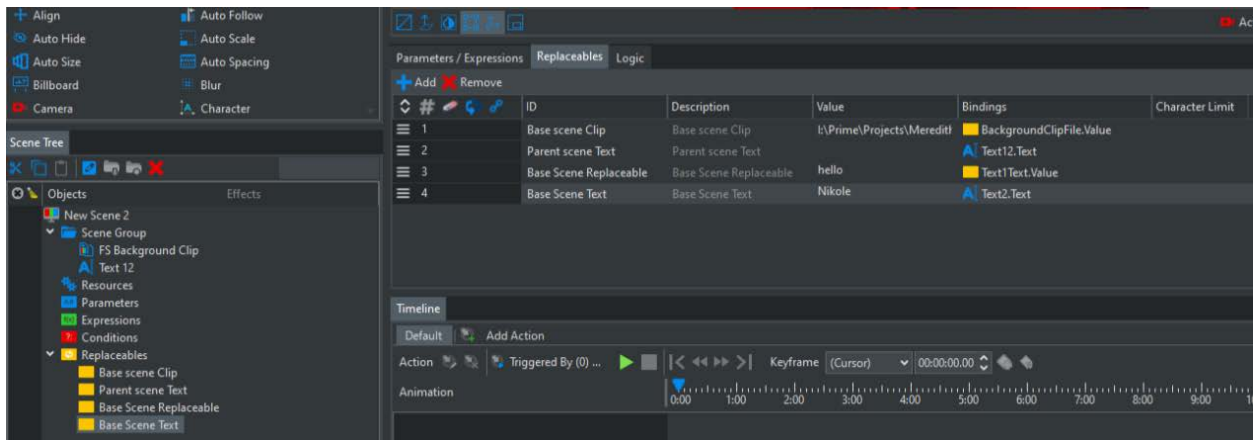


Effect In/Out

Effect In and Effect out are properties of the scene. The Effect in and Effect Out combo box will show the “Triggers” list.

Select an Action(s) as your effect In/Out or select a Condition to use “Conditional Transitions”. (See the “Conditional transitions” section).

Other choices are available as your Effect in/out as well such as a script or External Activation (Trigger an action in another scene).

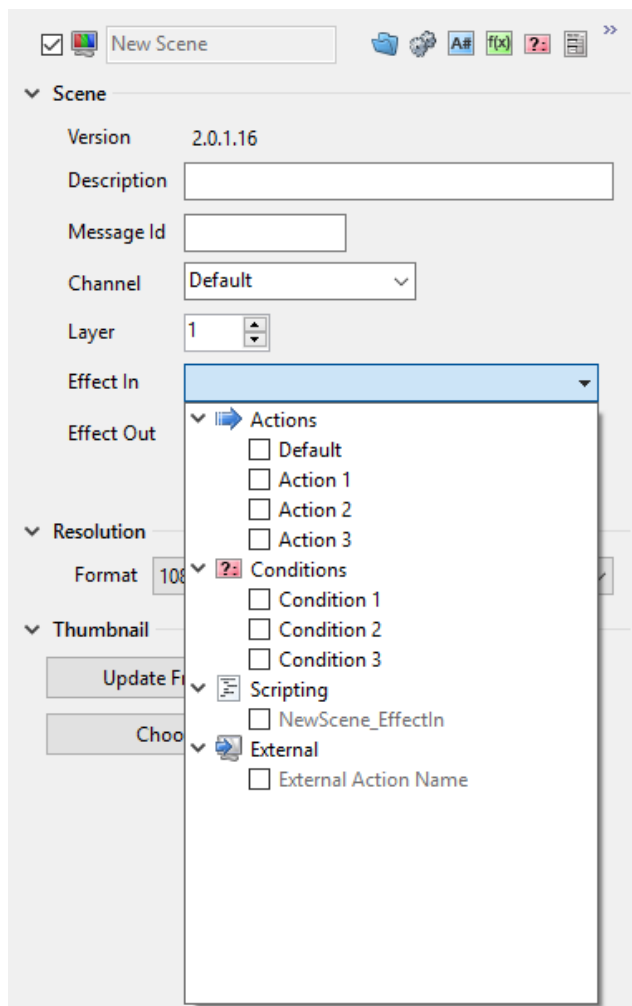

Conditional Transitions


There are two types of “Conditional Transitions”.


- 1.) Rules that evaluate which transition to trigger as the Effect In play based on conditions within the scene itself.
- 2.) Rules that evaluate which transitions to trigger in other scenes on output at the time the current scene plays to output.

Prime uses its “Conditional Manager” to manage the logic.

Users can select an action from the list or select a Condition to evaluate which transition to play as the effect in.

Example: If the Title text is blank trigger Name ONLY Action otherwise trigger the Effect In Action.

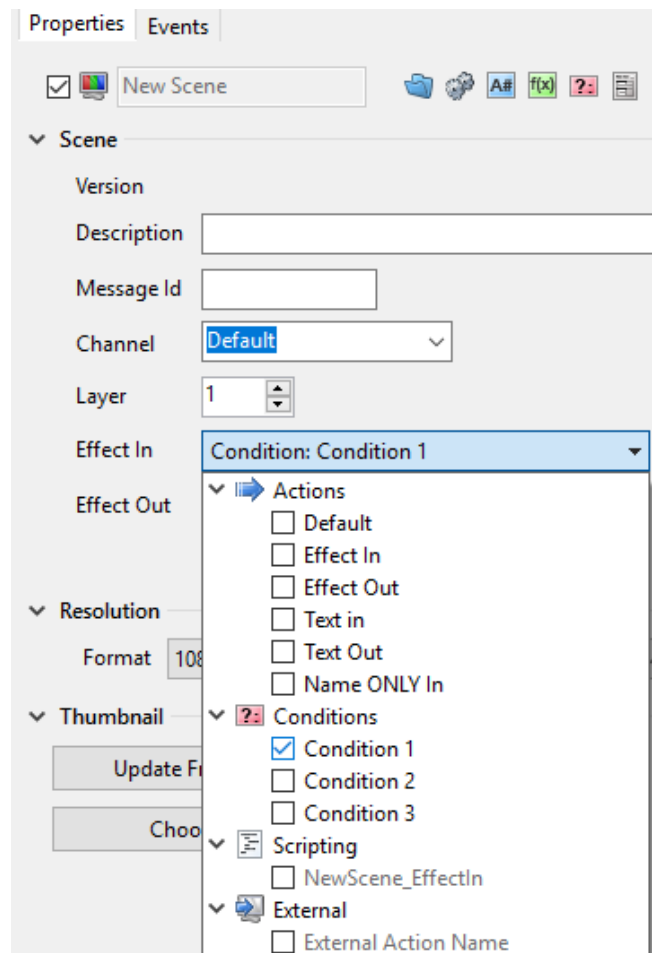

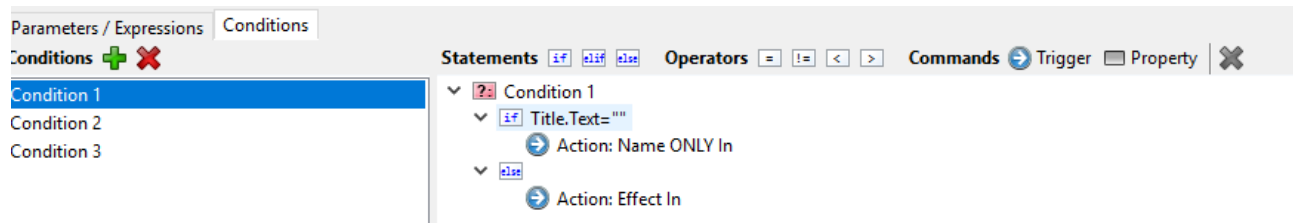

Conditional Transitions Advanced

Functions that allow evaluating the scene that's on the output channel.

From the condition editor the following functions are available for use with Conditional Transitions:

Channel.IsSceneOnOutput(string sceneName)

Returns true if there is another scene matching the given name on the current channel; the current channel is defined as whatever channel the scene executing the expression is on. This does not match the scene responsible for executing this function.

The sceneName can include wildcards like the External Action Trigger work from earlier this year.

Channel.IsSceneAndNameOnOutput(string sceneName, string layerExpression)

Returns true if there is another scene matching the given name and layer restrictions on the current channel; the current channel is defined as whatever channel the scene executing the expression is on. This does not match the scene responsible for executing this function.

The sceneName can include wildcards like the External Action Trigger work from earlier this year.

The layerExpression behaves like the feature in Intelligent Interface (>1, 1, >=1).

Channel.IsDescriptionOnOutput(string description)

Returns true if there is another scene matching the given description on the current channel; the current channel is defined as whatever channel the scene executing the expression is on. This does not match the scene responsible for executing this function.

The description can include wildcards like the External Action Trigger work from earlier this year.

FOR MORE INFORMATION ABOUT CHYRON VISIT:

[HTTP://CHYRON.COM](http://chyron.com)

Channel.IsDescriptionAndLayerOnOutput(string description, string layerExpression)

Returns true if there is another scene matching the given description and layer restrictions on the current channel; the current channel is defined as whatever channel the scene executing the expression is on. This does not match the scene responsible for executing this function.

The description can include wildcards like the External Action Trigger work from earlier this year. The layerExpression behaves like the feature in Intelligent Interface (>1, 1, >=1).

Channel.IsLayerOnOutput(string layerExpression)

Returns true if there is another scene matching the layer restriction on the current channel; the current channel is defined as whatever channel the scene executing the expression is on. This does not match the scene responsible for executing this function.

Scene.Layer

Returns the layer of the current scene.

Scene.Loaded

Returns true if the current scene is loaded.


Scene.Playing

Returns true if the current scene is playing


Scene.Name, Scene.Description, Scene.Locked, Scene.Version, etc. have also been added.

Examples:

Create some Effect In Conditions:

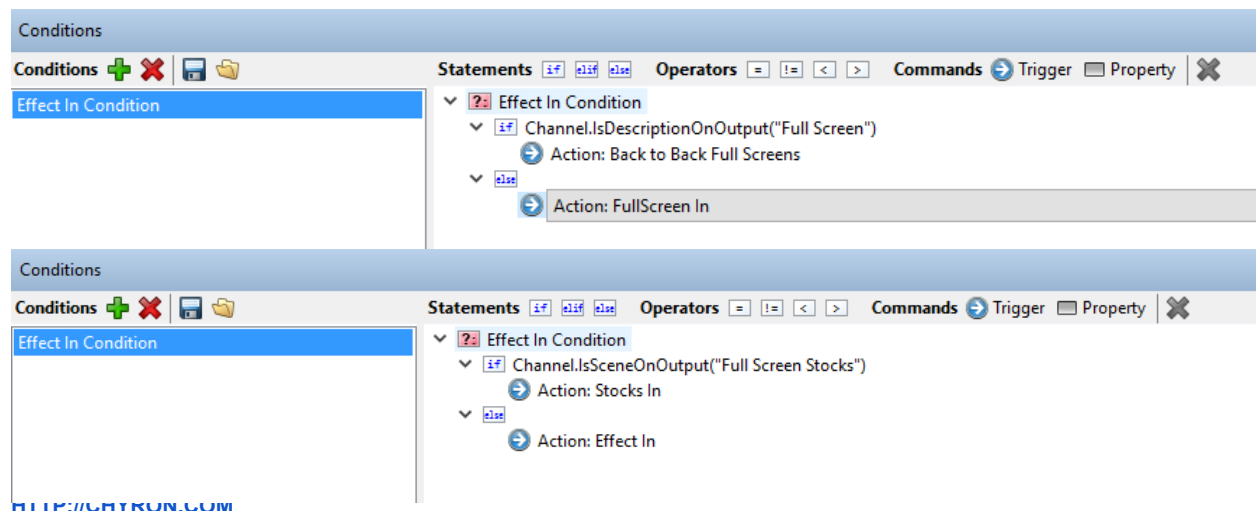

Hook up the “Effect In” as a “Condition”:

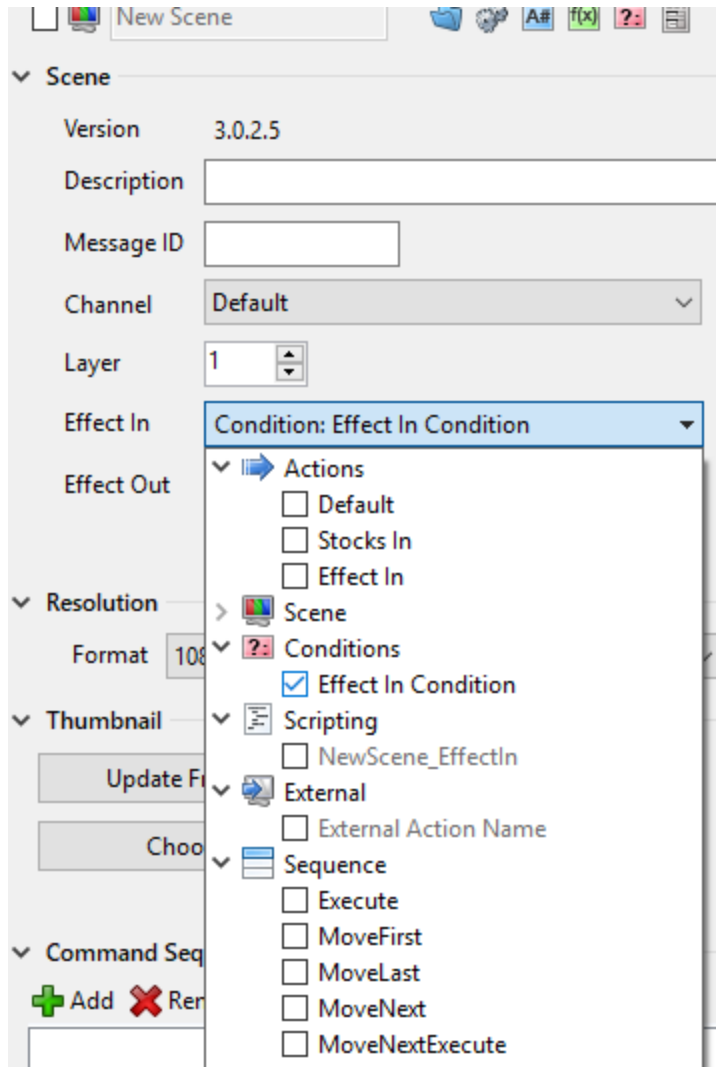

Update In/Out


Prime will automatically apply “Update In/Out” rules if the incoming message uses the same base scene as the outgoing message.

The Transition effect applied to the object will trigger automatically.

For a two line lower third,


If Message 200 (Not Scene, but Message) is on air and its base scene is “Lower third” and message 201 is cued and uses “Lower Third” as its base message then the transition that is assigned to each of the two lines will trigger when the incoming scene 201 is played.

IMPORTANT: *The “Replaceable’s list will determine which scene objects transitions will be fired. Add each object to the Automation ID list that you wish to be applied to Update In/Out.*

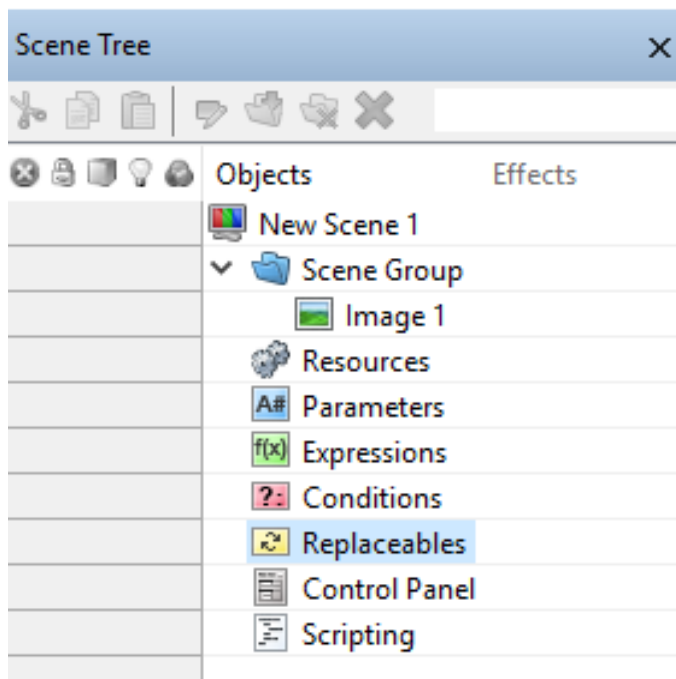

By default an incoming scene is prioritized over an outgoing scene. The Auto Priority sets the priority value for graphics automatically with respect to their position in the scene tree. To

manually adjust the scene priority uncheck the Auto Priority in the Scene Properties and set the Scene Group Priority > Render > Priority value.

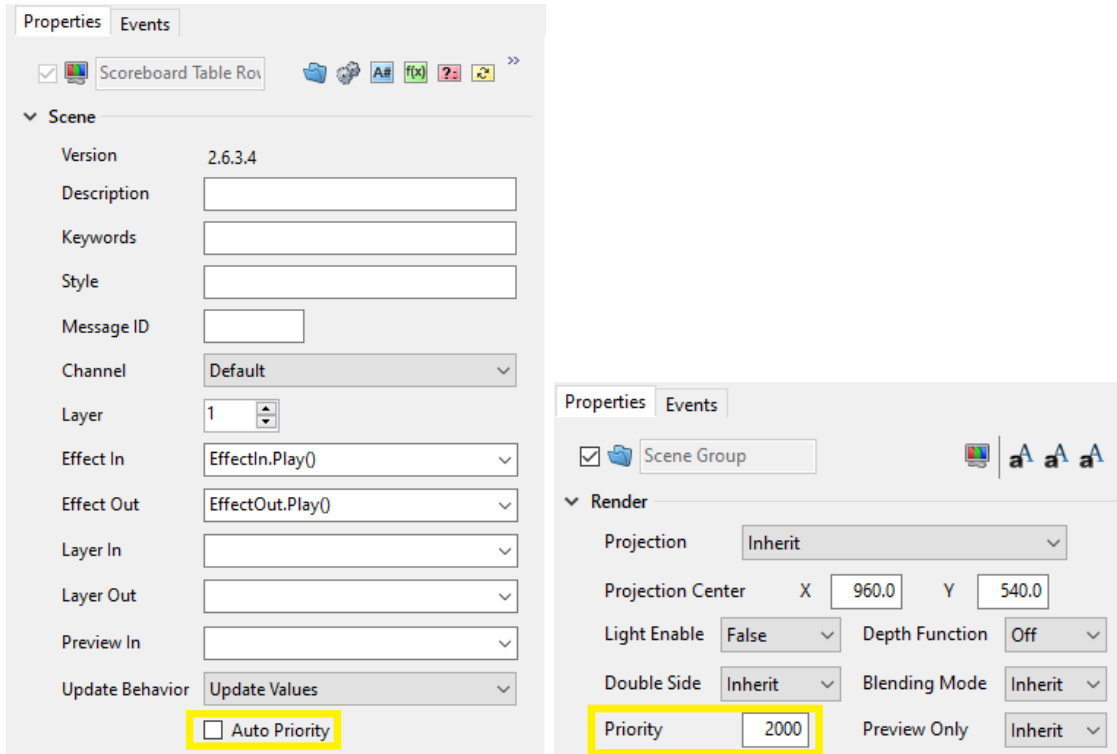


API & Scripting

API & Scripting is documented in the [PRIME_API_Scripting_Guide](#) document.

Bypass


Systems with a compatible Matrox DSXLE4 card can switch between Bypass and In Circuit directly in PRIME Playout.

When using a compatible DSXLE4 card and Matrox Hardware is selected, users can switch between In Bypass and In Circuit by clicking the Bypass menu in the bottom right hand corner of PRIME Playout.



Go In Bypass: System will not output PRIME graphics and video input will pass through

Go In Circuit: System will output both graphics and video input



PRIME Bypass Not Available Scenarios

- The Bypass Device is set to None
- The Bypass Device is set to Matrox and an incompatible Matrox card has been detected
- The Bypass Device is set to External Panel but the External Bypass Panel is not detected or has thrown an error.

*Please see the PRIME Playout Configuration Guide for Bypass Configuration details.

*External panel detection executes when switching to In Circuit.

FOR MORE INFORMATION ABOUT CHYRON VISIT:

[HTTP://CHYRON.COM](http://chyron.com)

Power Clips


Adding and Configuring Power Clips Controllers



Showing the Power Clips Controllers

Power Clips are clips that are not part of individual scenes but clips that can play from the independent clip players created and configured in the “Playout Configuration”

When A clip player is added through the PRIME Playout Configuration, the player clip controller becomes accessible in the Runtime user interface menus.

Checking a clip player to view will show the Clip Player and its controls:

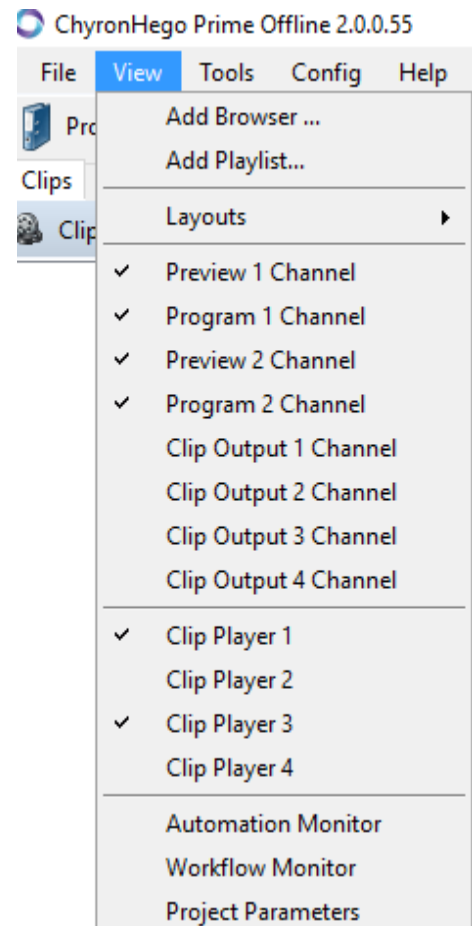

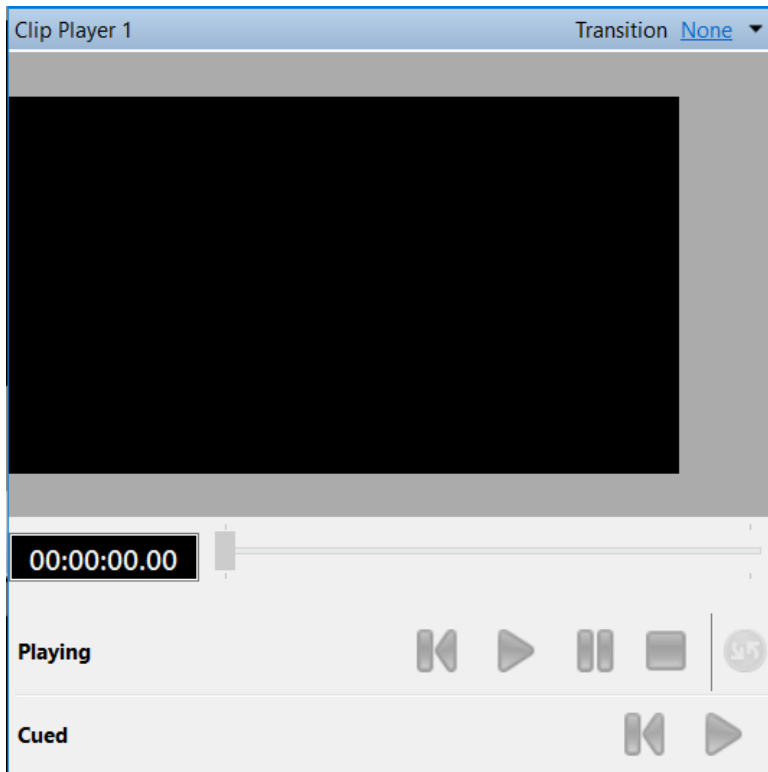


Selecting the drop-down caret in the upper right corner allows users to select to show/hide Playback controls.

Default Transition

Assign a default transition for clips that play from this controller.

Playing Power Clips

Clips played with this controller will play to their assigned channel and layer which is defined in the Controller setup not the clip itself.

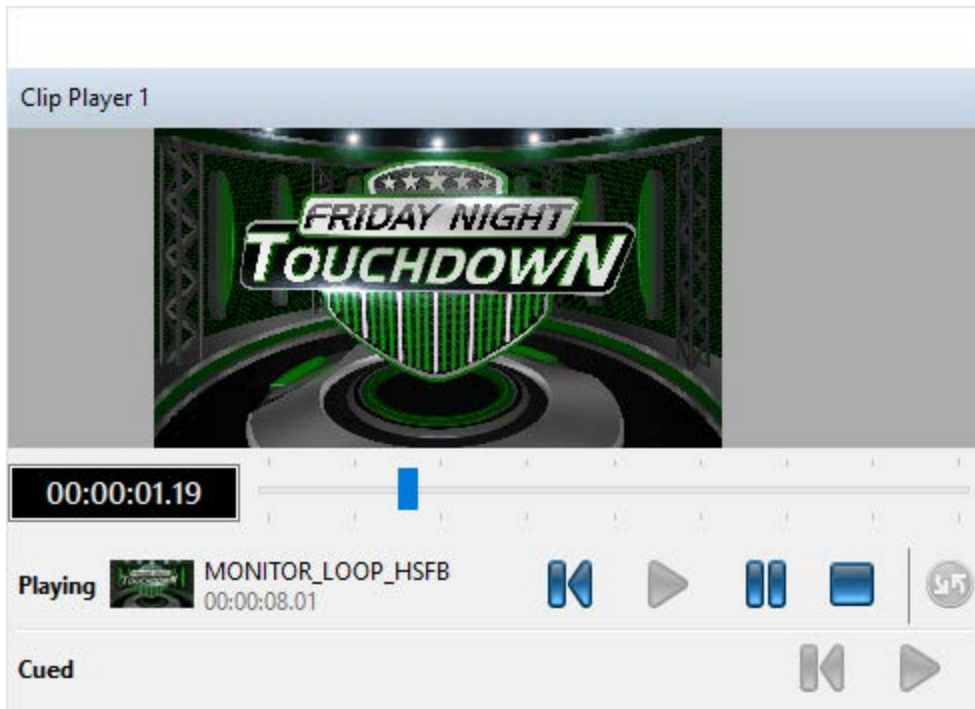


Clips can be played back by automation under various protocols or manually by dragging clips from the current Projects clip folder or the common clip folder.

Editing the Clip Metadata


*Clip files consist of two files, 1.) The actual media file such as **MyMovie.mov** and the associated side car file that contains all the metadata associated with the clip. Information stored there are settings like “Hold first Frame”, “Description”, Thumbnail etc.*

Prime Clips do NOT use a backend database, instead it uses the Windows file system as its database and the Windows Search API for searching.

Clips are stored in your Projects “Clips” sub folder or in you Projects Common Clips folder:

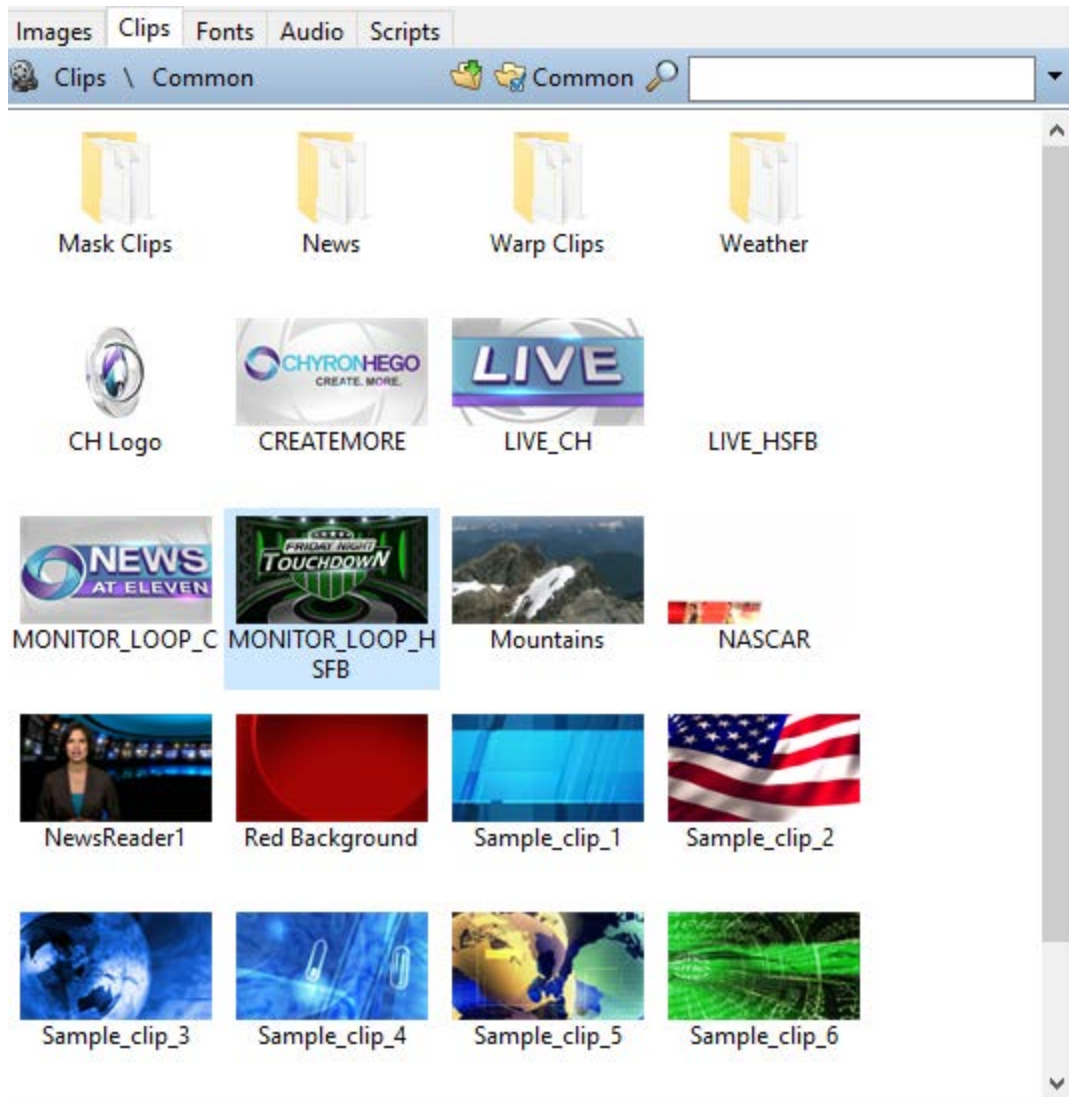


To edit your clip right click on your clip to edit all the associated meta data for the selected clip:

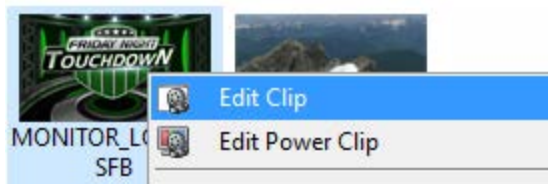

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

This will bring up the standard clip dialog:

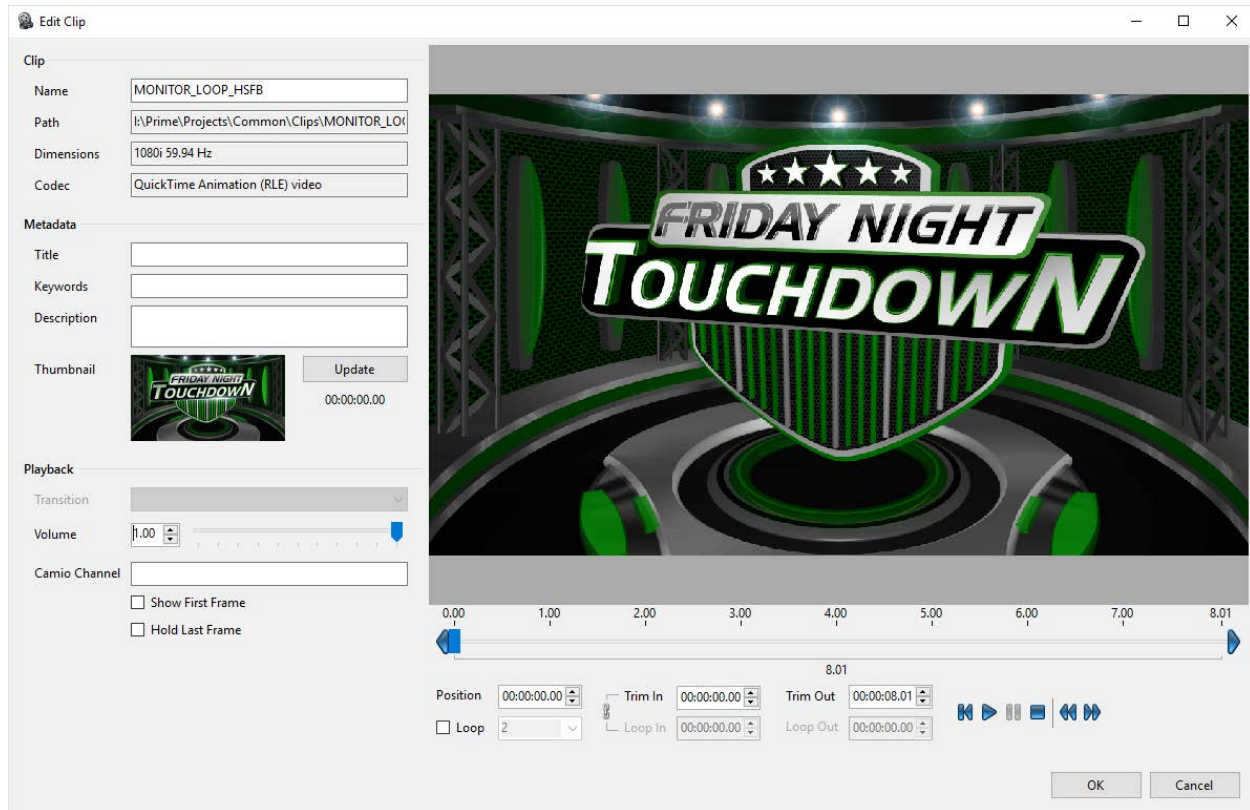


Insert all the meta data fields you require.

4-point looping is available using the clip timeline cursors.


Creating a Power Clip

A Power Clip is the ability to add Graphics, Text and other scene elements to your clip.

Select a clip from your Clips database and select “Edit Power Clip”:

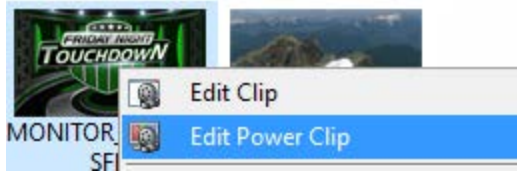


This will launch the Advanced Power Clip Editor allowing you to add more elements to the clip. As you can see a “Power Clip” is essentially a scene with the base clip at the heart of it:

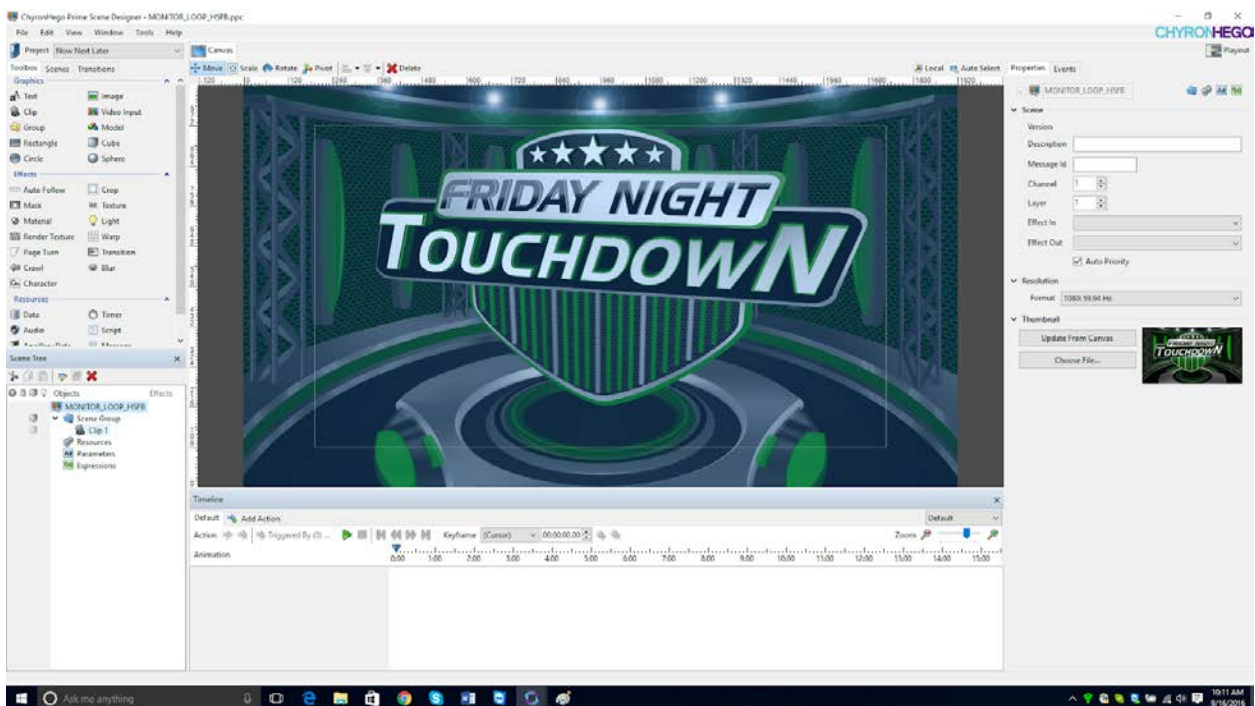


In the following example we will add an image and some text to the clip. We will add an animation to animate the image and text on.

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

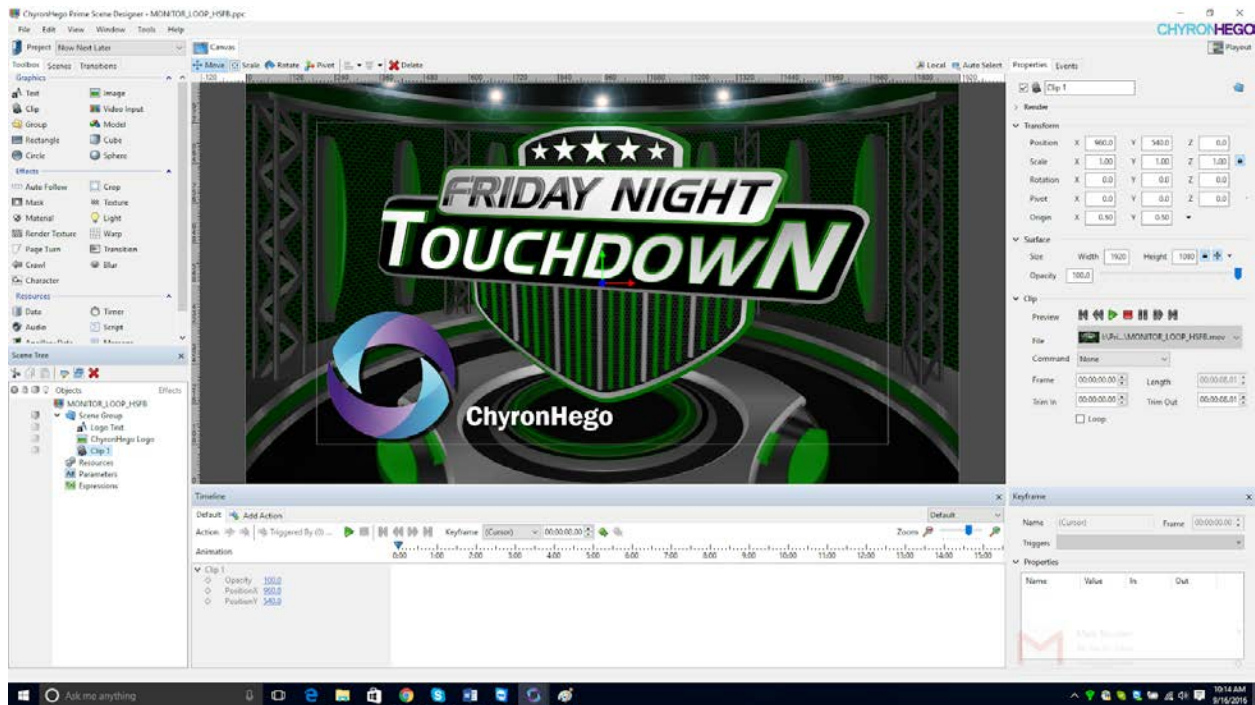


From the Timeline “Default” transition I will fade up the logo and animate the text to move on screen from screen bottom.

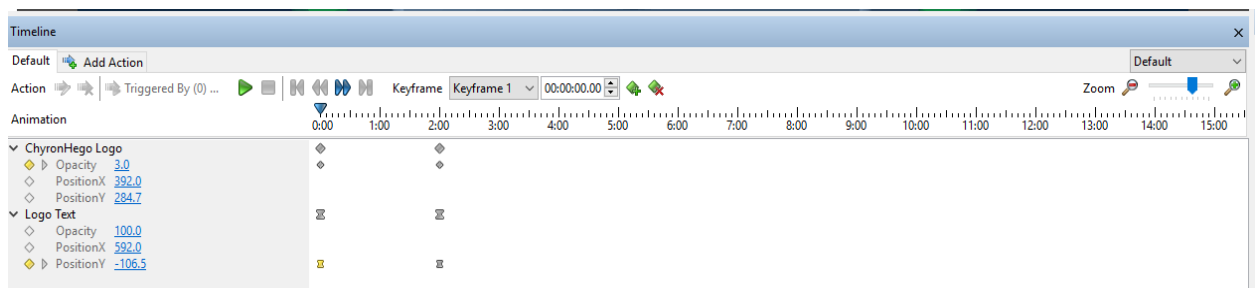

Save the clip.

When the clip is played the “Default” transition is played dissolving up the logo and animating the text to move into position from the bottom of the screen.

You may want to update the thumbnail associated with the clip. Select the top node from the scene tree. From the scenes property editor, you will see a “Thumbnail” section. Select “Update from Canvas”.

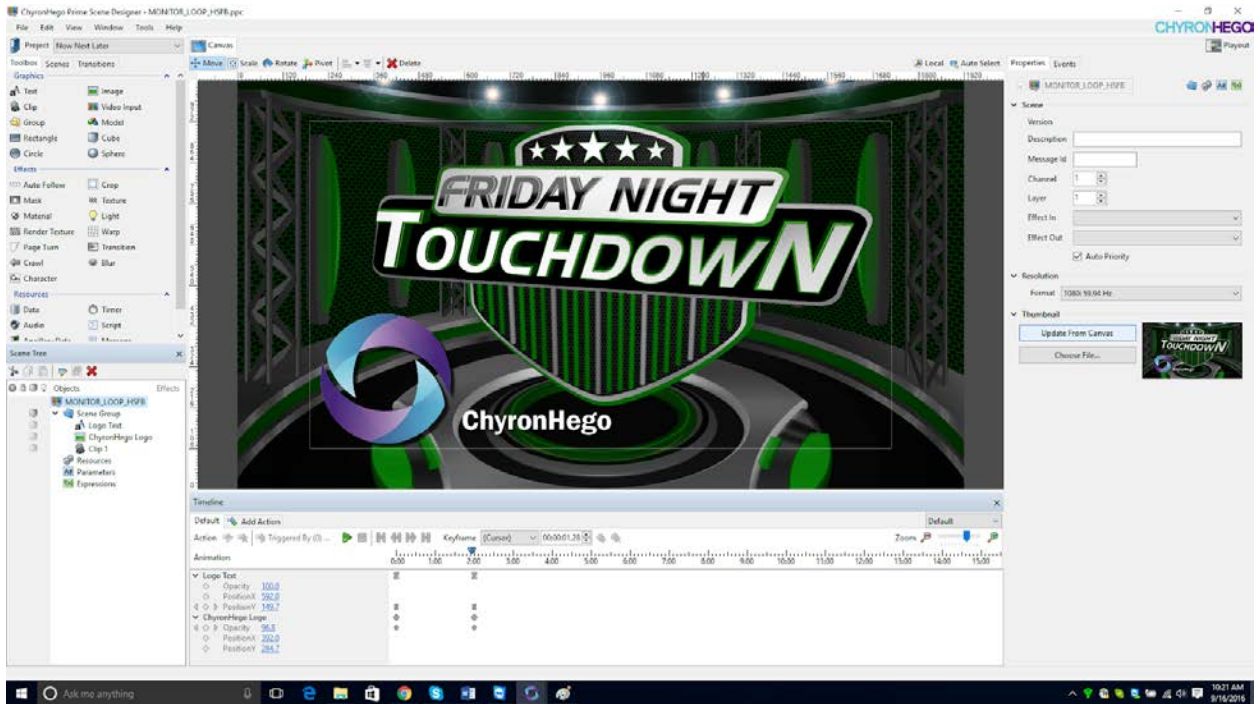


Power Clips will have an icon in the thumbnail in the browser. This clip is a Power Clips and has key as shown in the browser by the two icons in the lower right hand corner:




To Expose the Image and text to the Playlist or CAMIO/LUCI add the items to the Automation List:

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

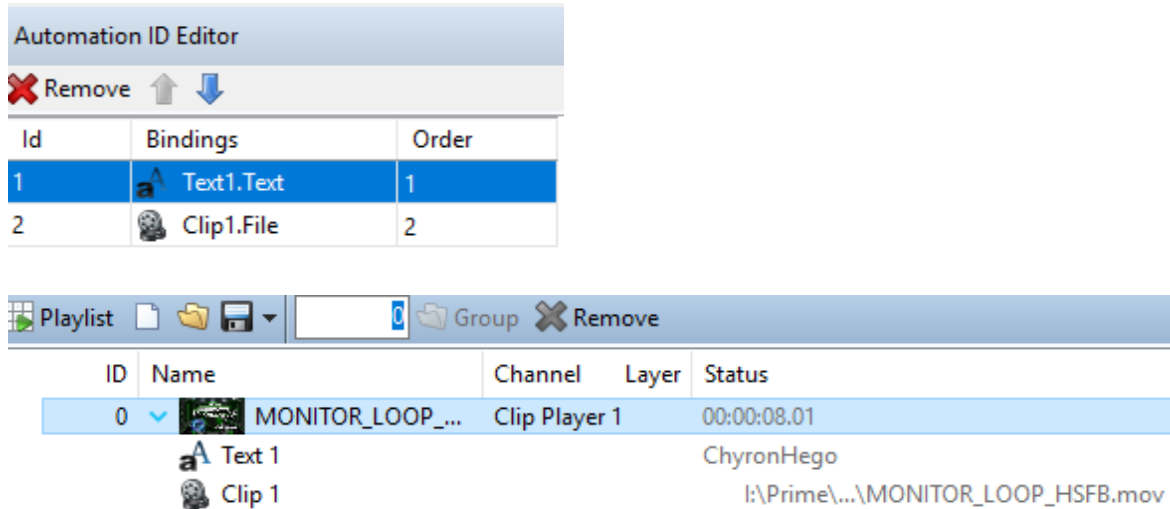


Creating Clip Transitions


From the Designer File menu select “New Clip transition” to open up the Clip Transition Editor

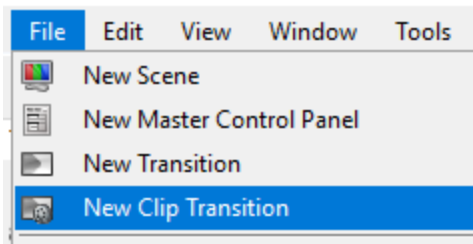


Select Your “In” or “Out” transition from the Scene Group

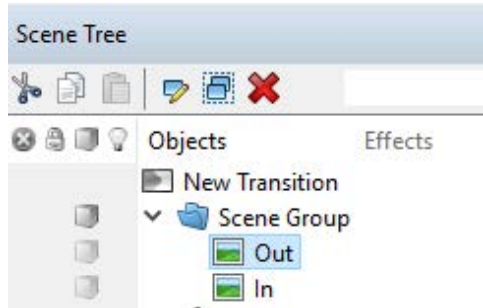


The Time line Editor allows you to keyframe your effects

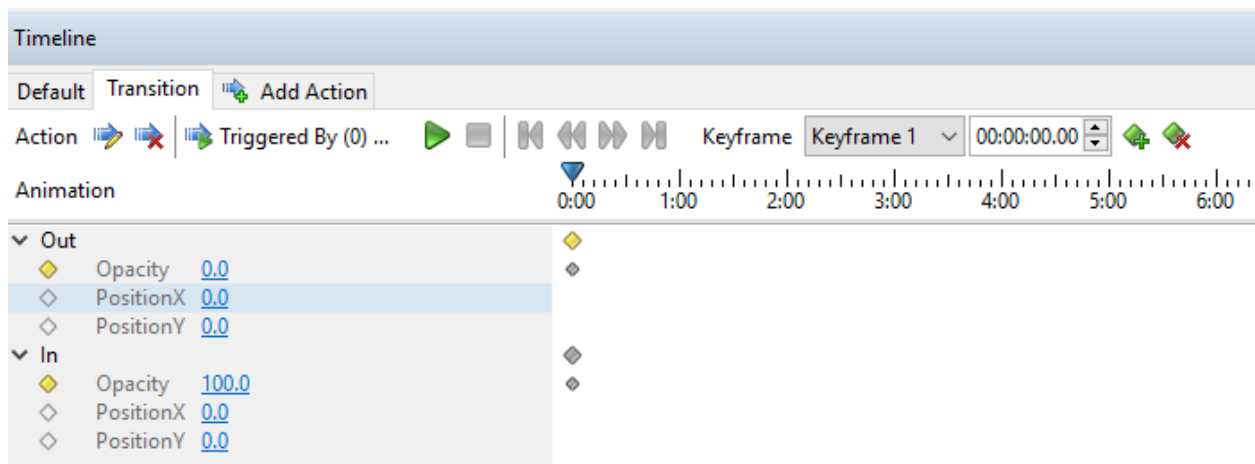

Your transition can now be applied to a Clip using the “Edit Clip” menu

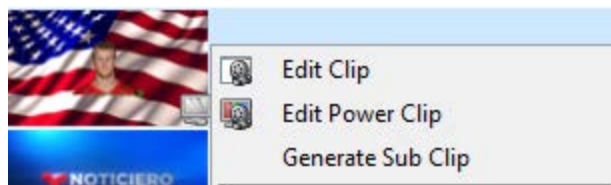


Select your clip transition from the “Transitions drop down menu.

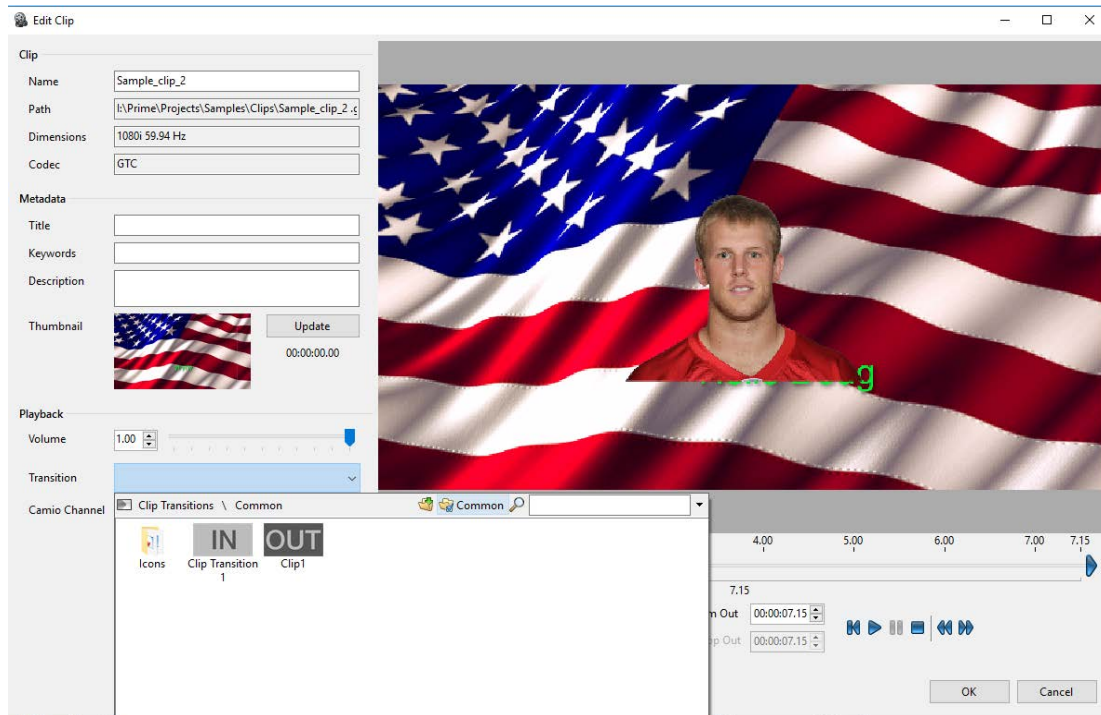


Creating a Sub-Clip

Right click on a clip and select the “Generate Sub-clip” menu item to bring up the clip editor

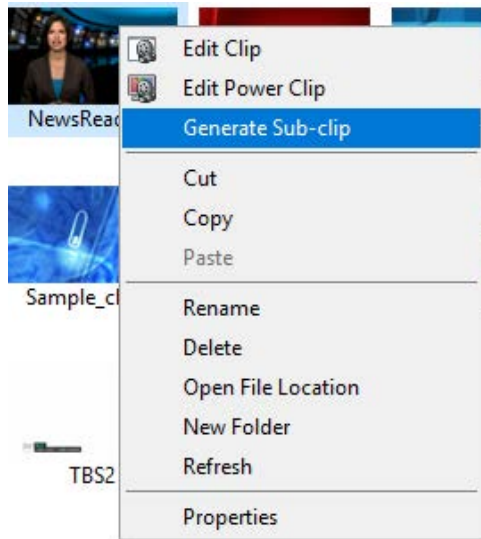

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

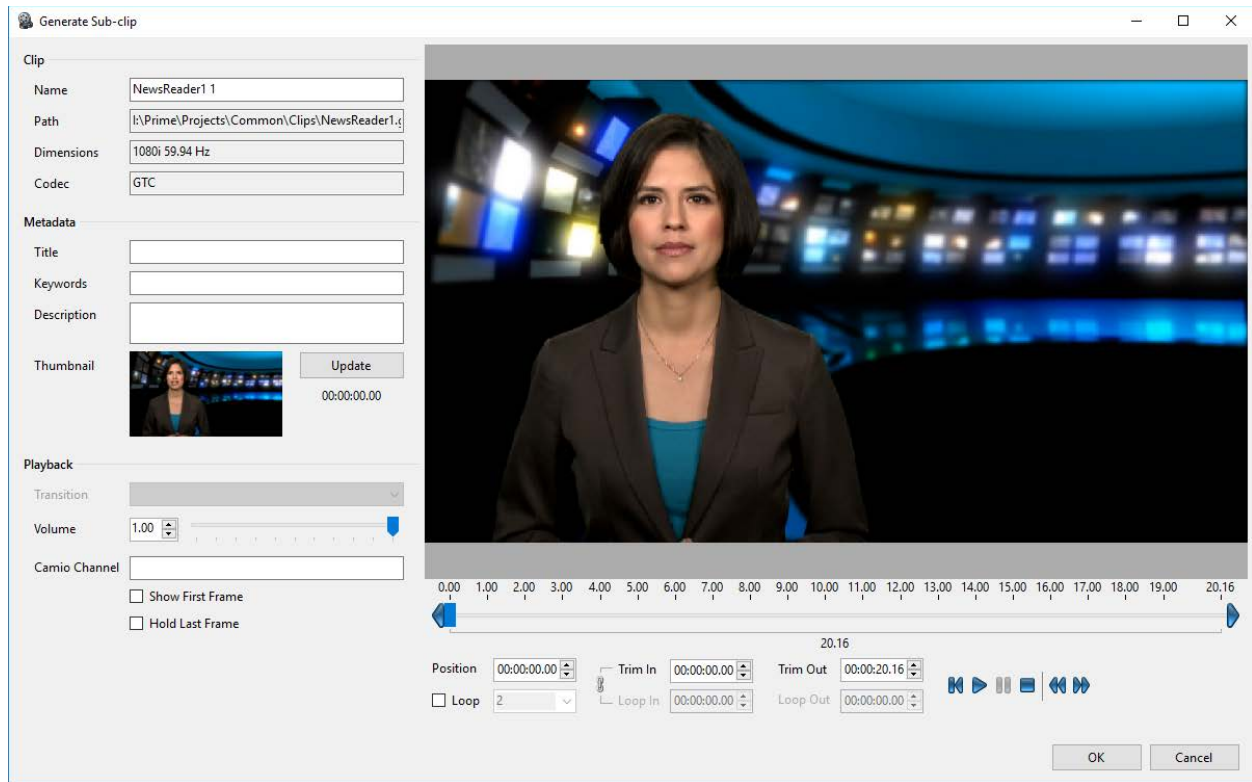

Set new In and Out points to generate the new sub clip

Searching for Clips

Primes Search functionality uses the Windows Desktop Search API used in Windows Explorer.

Note: PRIME does NOT support search capabilities for projects on mapped drives due to the Microsoft Search API


The Browser search box:



Searches can be saved and edited:




Edit/Save Searches

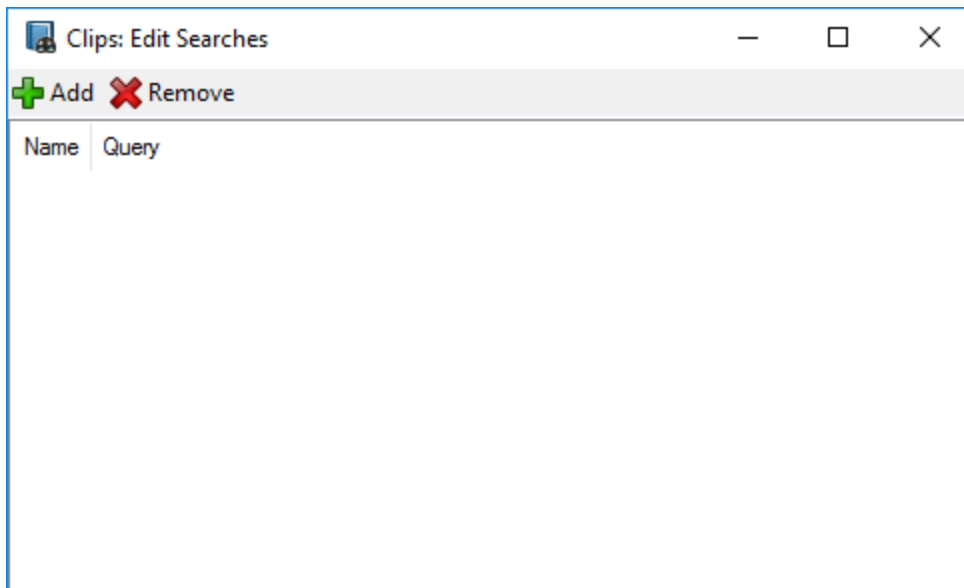

If you type into the Search Field Prime will search the following fields;

Name, File Path, Description and Keywords.

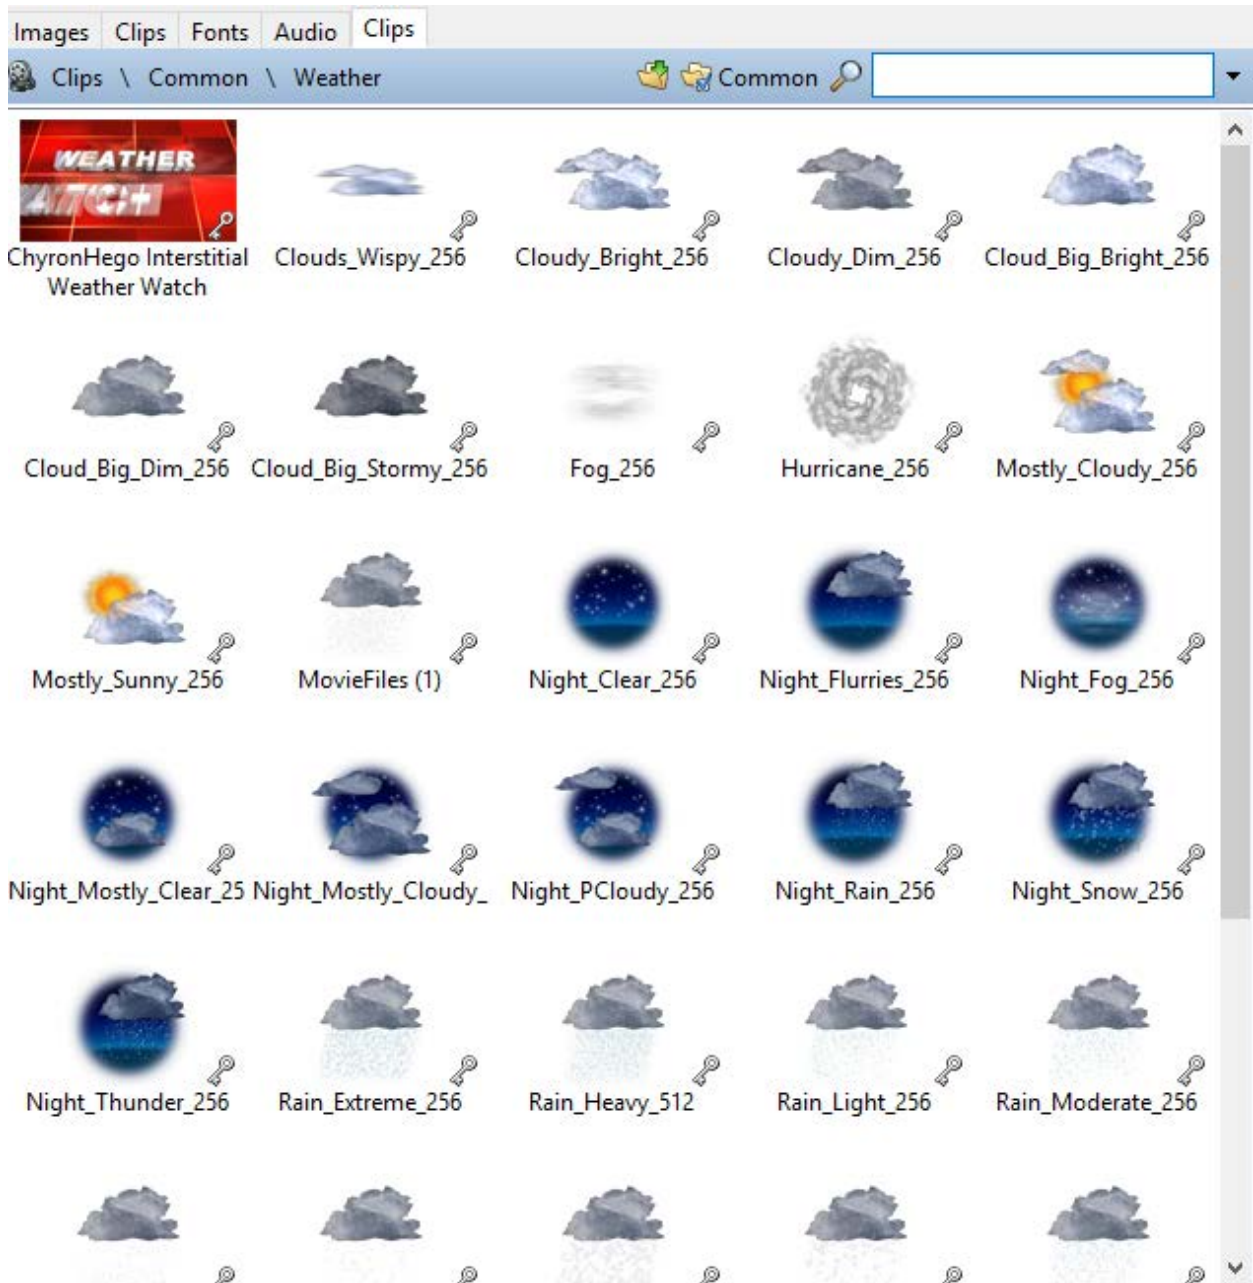


Now type in “Rain” results in: *(any file that has “Rain” in the Name, File Path, Description or Keyword will show up as a result of the search)*

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)



Advanced Searching

Click the magnifying glass icon to launch the advanced search dialog

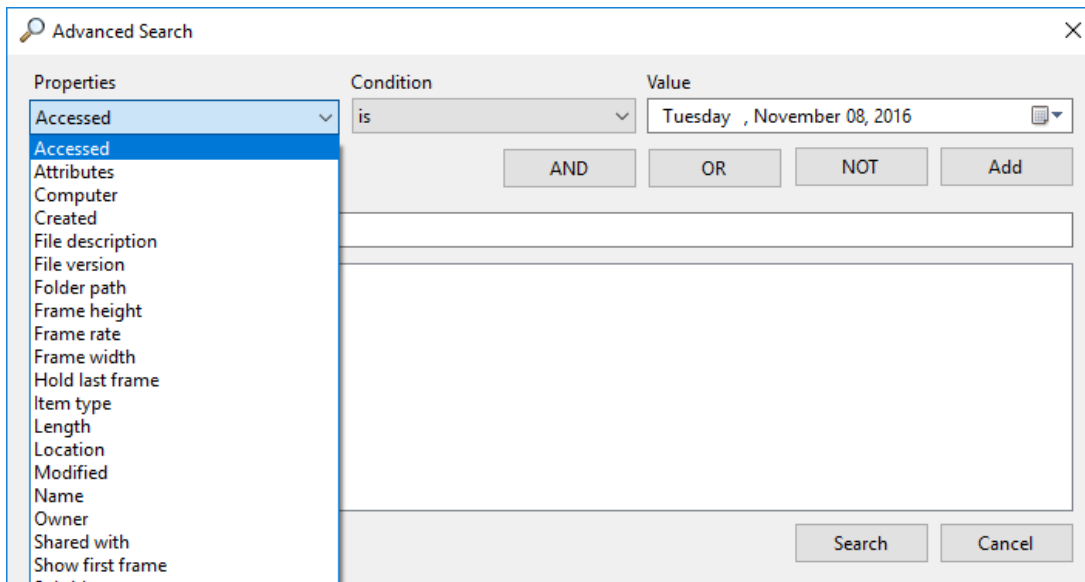

The advanced search allows searching on all the fields associated with clips

For extended search and filtering capabilities use the extended windows search terms

Microsoft Generic Search Query

Microsoft Image Search terms:

Microsoft Video Search terms:

Examples of extended search terms:

System.FileDescription

System.Title

System.Video.FrameWidth

System.Video.FrameHeight

System.Video.FrameRate

System.Keywords

Prime.HoldLastFrame

System.Video.FrameWidth:>10

Archiving Clips

Clip files consist of two files, 1.) The actual media file such as MyMovie..mov and the associated side car file that contains all the metadata associated with the clip. Information stored there are settings like “Hold first Frame”, “Description”, Thumbnail etc.


Right click on a clip:


- Set the destination for the archive.

FOR MORE INFORMATION ABOUT CHYRON VISIT:

[HTTP://CHYRON.COM](http://chyron.com)

- Add a prefix or suffix to the clip file.
- Move the Media file. This option moves the actual clip file otherwise just the associated metadata file is moved to the archive folder.

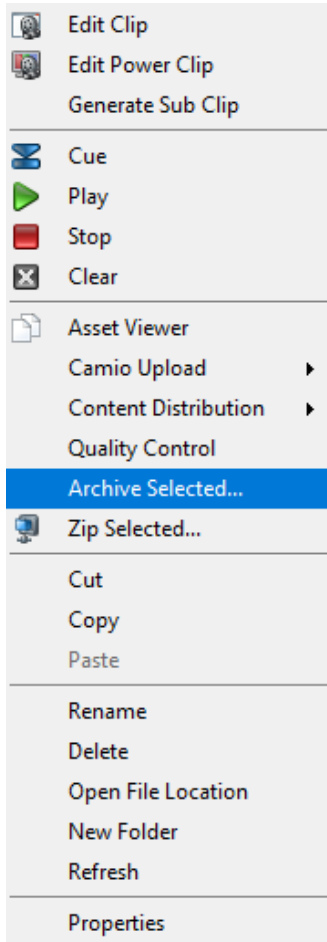

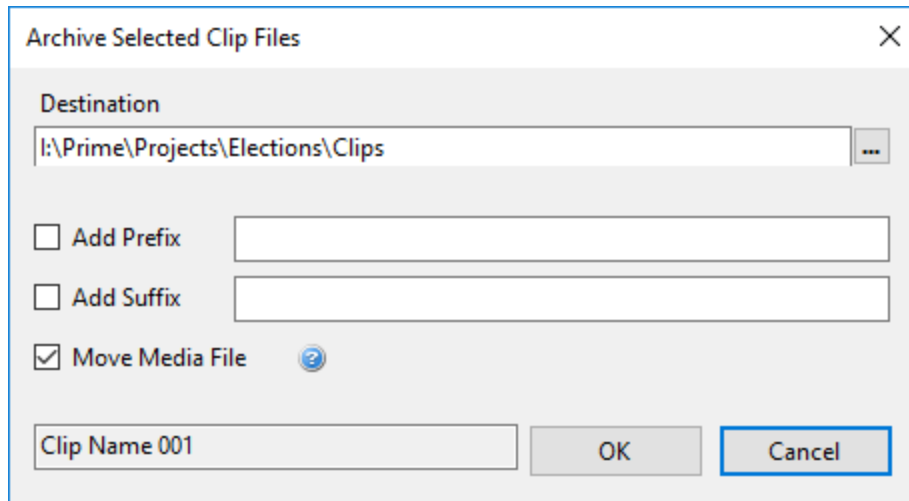


Clip Recorder


Adding and Configuring Power Clips Recorders

To add Clip Recorders, view the **PRIME Playout Configuration Guide**

View the Clip Recorder


Once Clip Recorders are added in the PRIME Playout Configuration they will become accessible in the “View” menu

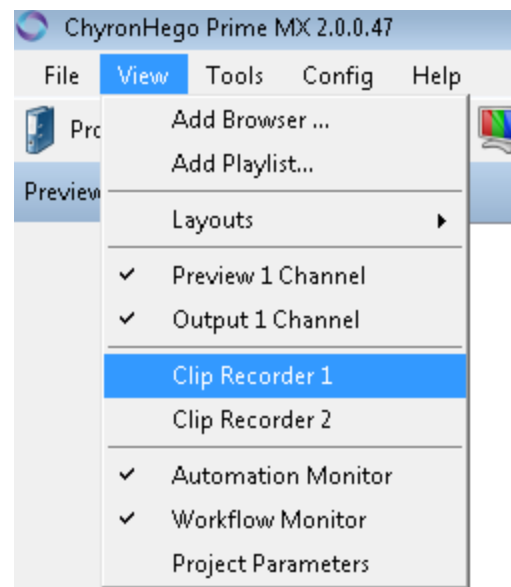

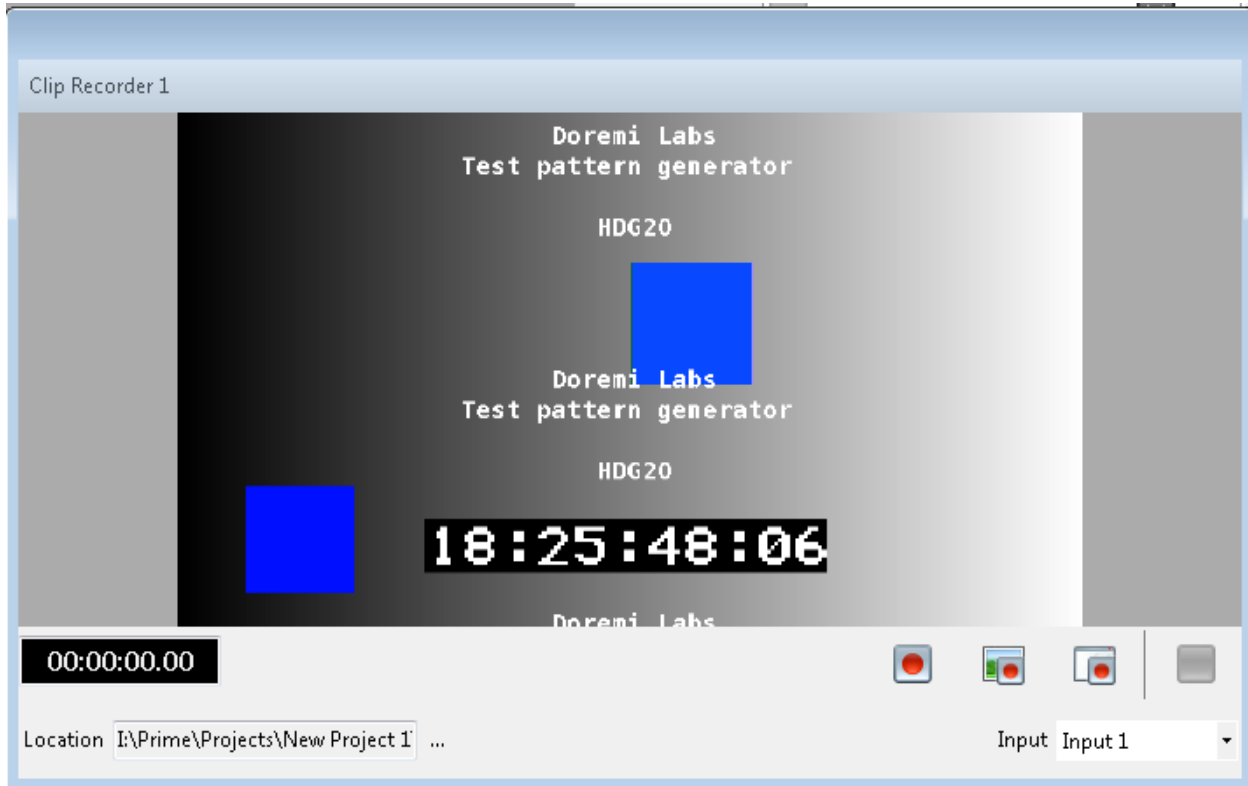

Clip Record functions:

- **Quick Record-** Starts recording immediately from the selected input.
- **Record-** Brings up the record dialog allowing users to enter meta data to be associated with the clip and select clip compression.

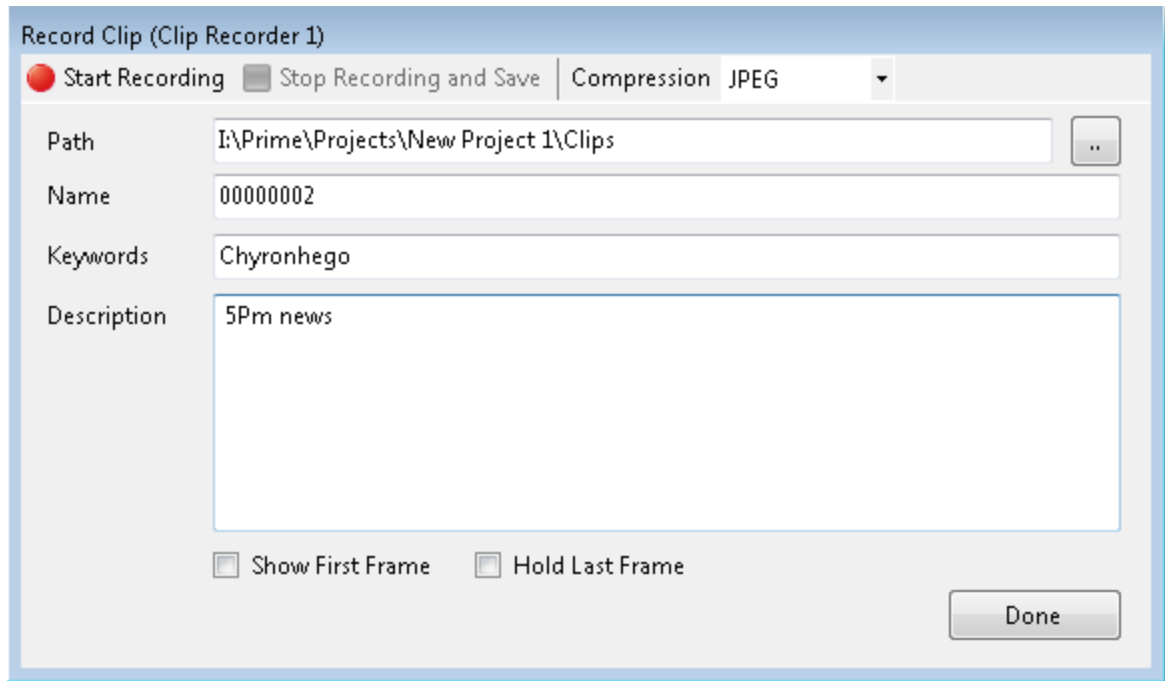

- **Frame Grab**-Grab a single frame of video input
- **Stop**-Stops recording the Quick Record

Clip Convertor

See the separate document on the Clip convertor/Watch folders.


CAMIO

Template Preparation

Clips and Graphic Templates can have replaceable elements that will show up in the ChyronHego NRS plugin. To define which elements will show up add them to the “**Replaceable Editor**” found in the Designer. Drag and drop from the scene tree the elements you want to exposed to the NRS plugin for producers to be able to fulfill.

Note: these elements will also now be shown in the Play List as well.

Replaceable Fields

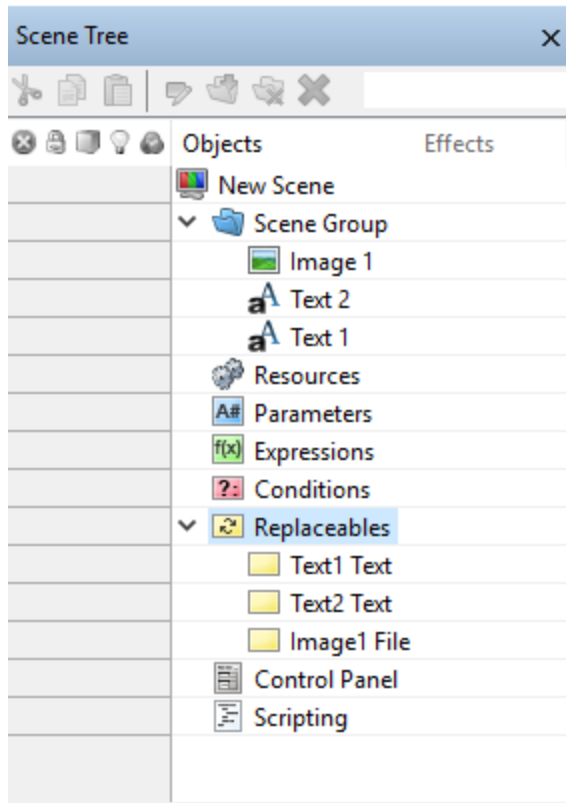

Auto Erase


ID	Description	Bindings	Order	Auto Erase
Text1 Text	Enter the Persons Name:	Text1.Text	1	<input type="checkbox"/>
Text2 Text	Enter the Persons Title:	Text2.Text	2	<input type="checkbox"/>
Image1 File	Select an Image for this person:	Image1.File	3	<input checked="" type="checkbox"/>


- **Id:** This is the ID automation will use to identify this item.
- **Description:** This is a user-friendly description and is also used in the NRS Plugin (LUCI) as the label for the replaceable item.
- **Order:** Used by legacy automation commands.

- **Auto Erase:** The data in this field will be erased in LUCI when the template is selected.

LUCI Preview Only

The “Preview Only” option allows for scene elements to be visible in LUCI templates and Previews. Any Scene object that has “Preview Only” marked as “True” will be visible in LUCI but will NOT be visible on the Playout machines. This option can be toggled On/Off from the “Tools” menu. When set to “Inherit” the setting will inherit from its parent. This way an entire group can be “Preview Only” by setting the Groups “Preview Only” setting to True.

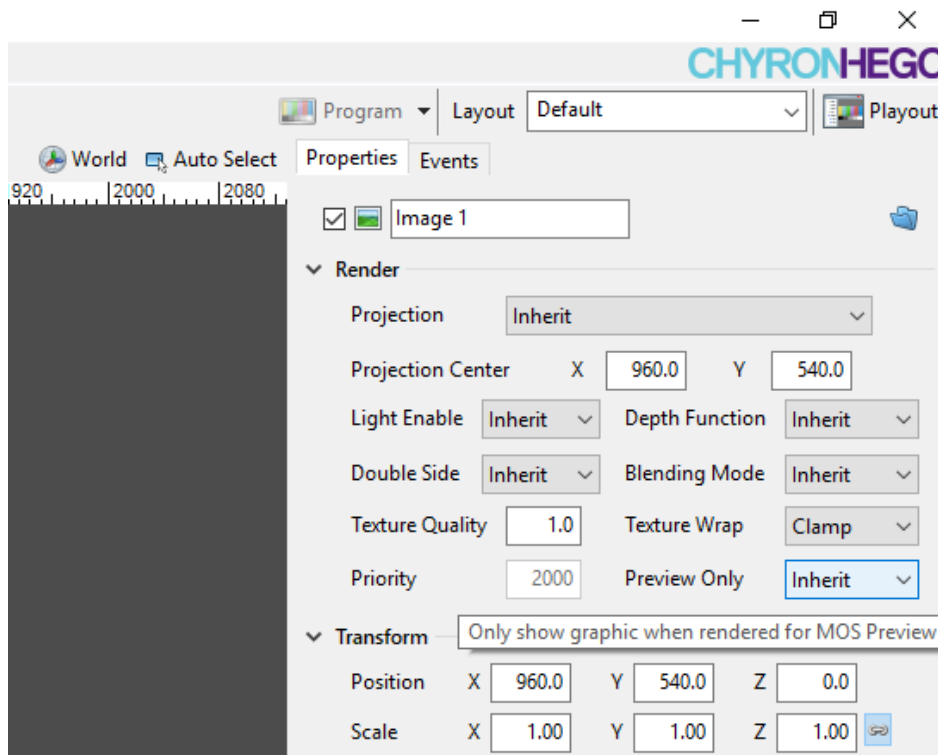


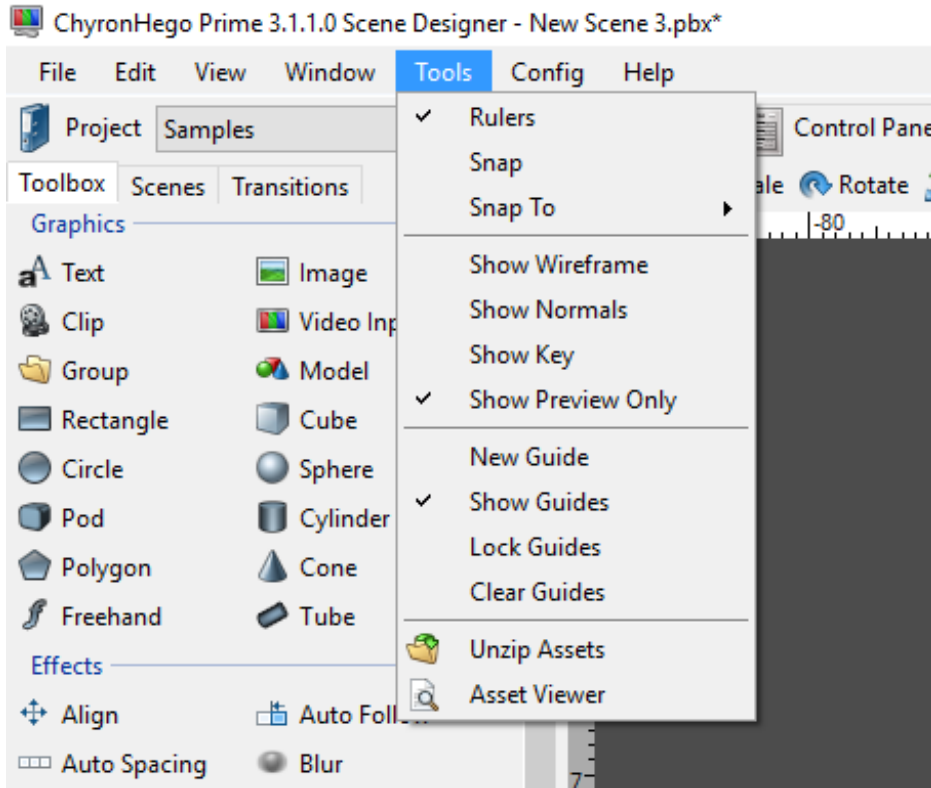

Publishing


Publish a single scene

Right click on a scene or clip and select "Upload to CAMIO". Select the CAMIO server from the list of available servers defined in the above configuration:

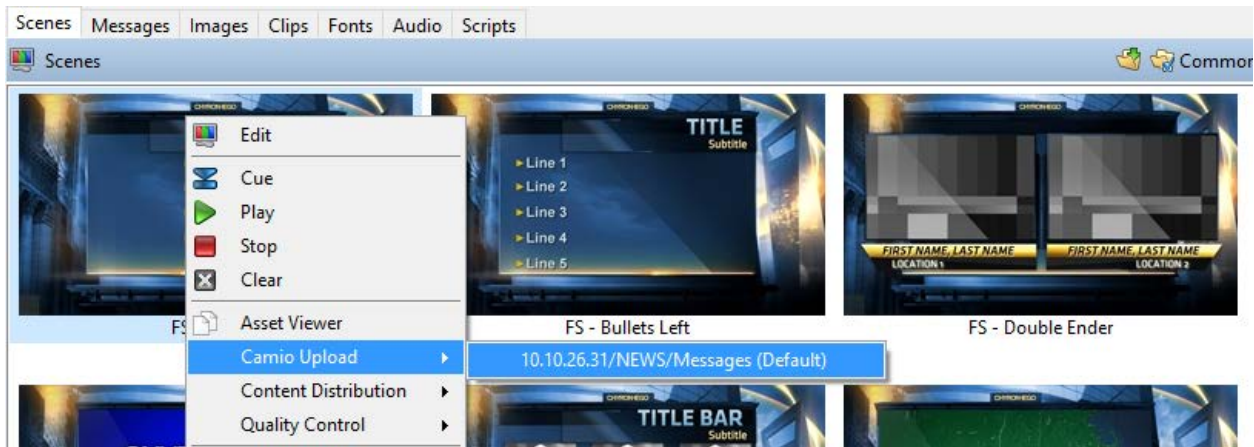

Publish a Project

Click the Project Icon in the upper left hand corner of the Runtime user Interface and select “CAMIO Upload” menu. Select the CAMIO server from the list of available servers.

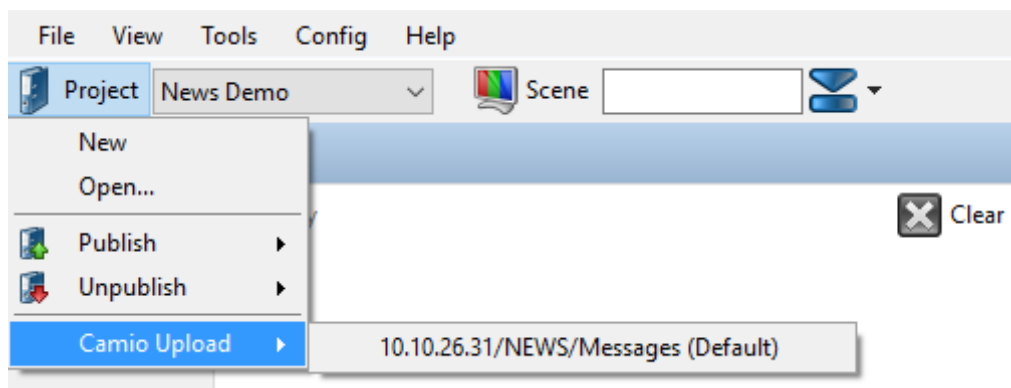

CAMIO Playback

This section refers to the PRIME Playout devices

Configure the CAMIO Server:

From the Runtime User Interface select the menu Config->Settings->CAMIO. Press the “Add” button to configure CAMIO Server(s):

Select CAMIO Destination ✕

CAMIO Server

Address

Successfully pinged server

Upload Destination

Context

Scenes


Clips

Images

Login


Username

Password

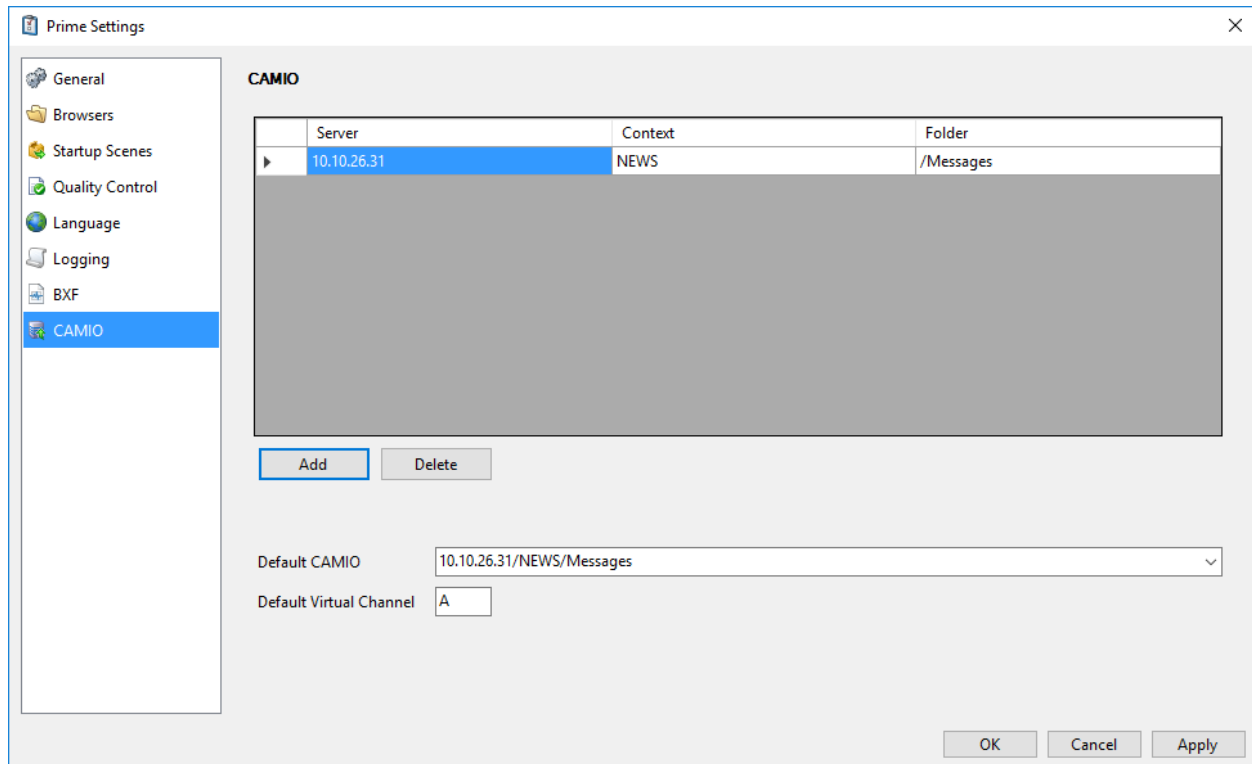

Configuring for Playback Control:

Add an XML connection in the Automation Settings: This connection will receive playback commands from the CAMIO playback device controller (ISQ).

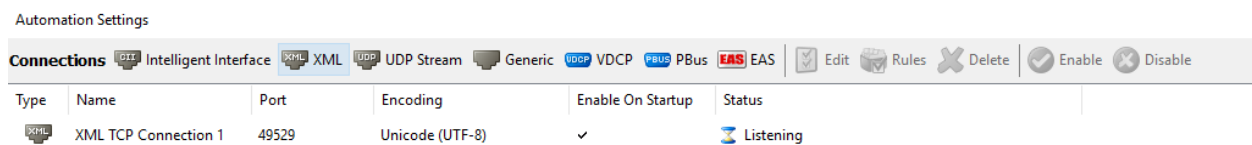

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

CAMIO Renderer

This section refers to the CAMIO PRIME Preview Render Application that runs on the separate CAMIO Render device.

CAMIO PRIME is the PRIME software configured to generate previews within the NRS plugin.

The ChyronHego Dongle will show the “Device Type” as “CAMIO Renderer”. When set the PRIME application will serve as a Preview Renderer ONLY. Many features within the PRIME software will be disabled or unavailable. When launched the splash screen will show a “CAMIO PRIME Renderer”.

The CAMIO Renderer Automation Connection:

This connection will automatically be added and enabled. No Configuration required but is useful for diagnosis purposes to view the command stream.

Automation Settings

Connections					
Type	Name	Port	Encoding	Enable On Startup	Status
	Camio Connection	49530	Unicode (UTF-8)	✓	Listening

Configure the CAMIO Renderer End Point:

LIVE

Uploading to LIVE

Configure Live Uploader

In Prime Settings > Live Uploader select Add to create a new connection Profile.

Name: Alphanumeric value of your choosing

Bucket Details

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)


Region: Select the region where the S3 Bucket is hosted

Bucket Name: Populate with S3 Bucket name provided to the admin of your Live environment.

Credentials


Access Key ID: Populate with Key ID provided to the admin of your Live environment

Secret Access Key: Populate with Secret Access Key provided to the admin of your Live environment.

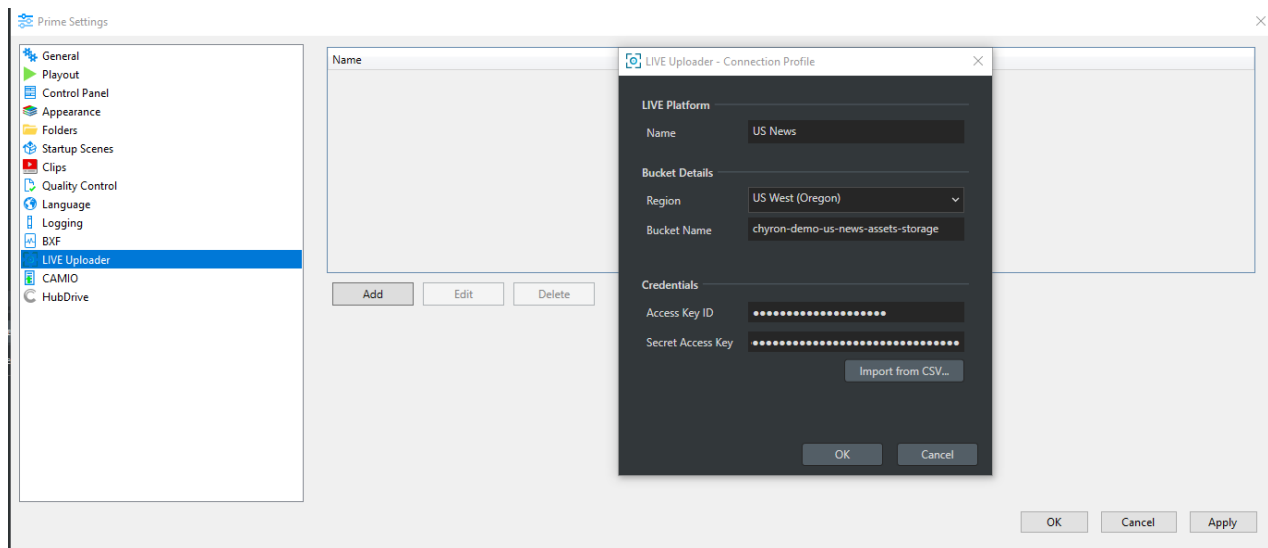



Upload a single scene

Right click on a scene or clip and select "Live Upload".

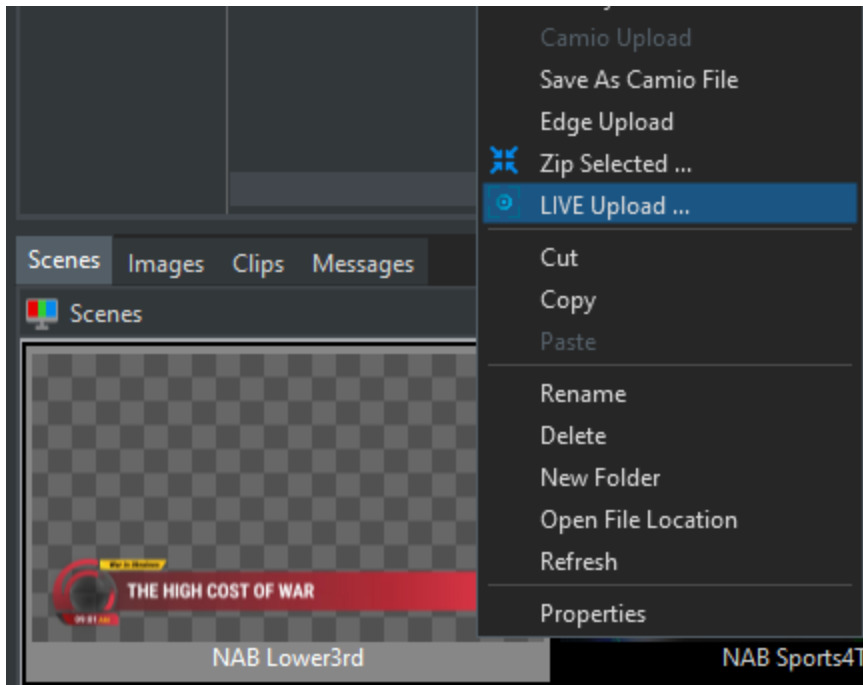

Select the Live Platform from the list of available configured Live environments, in the top right hand corner.

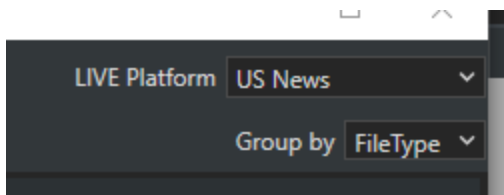

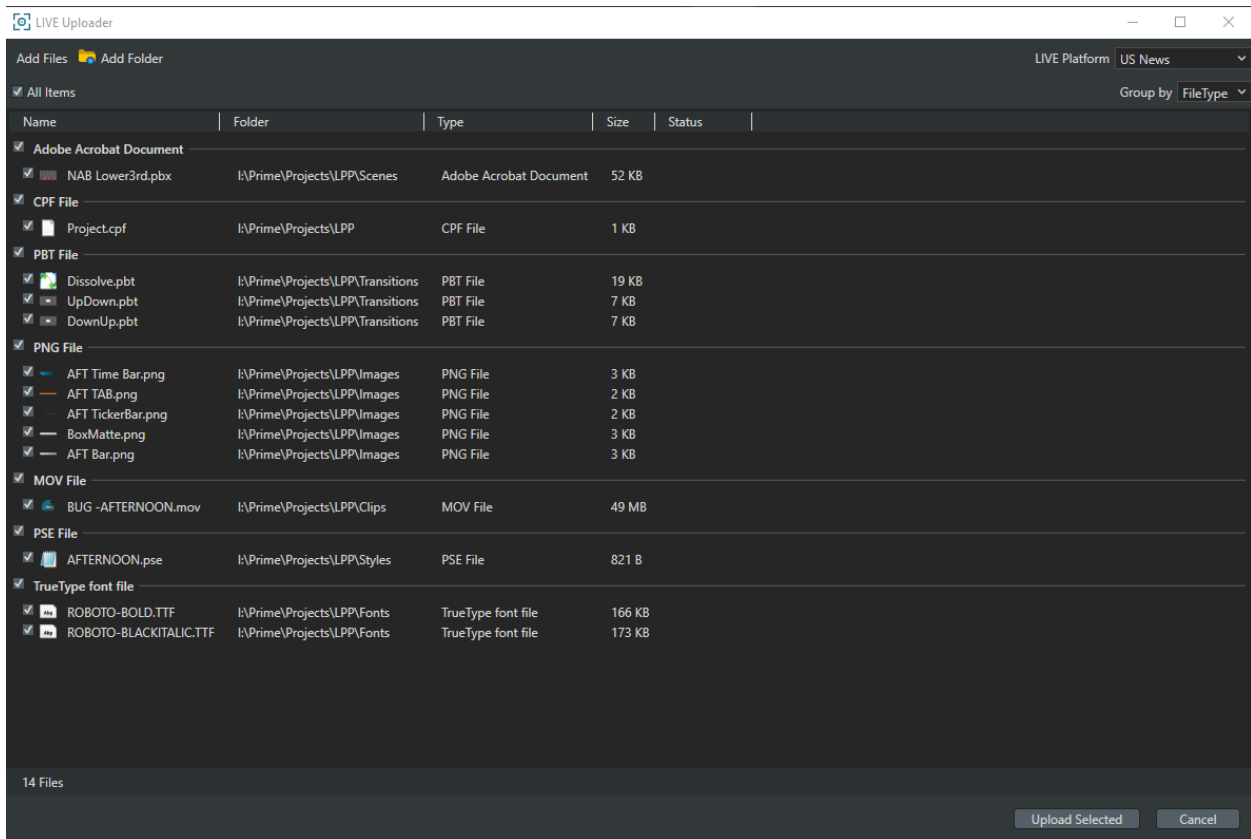

Select Add Files to add additional files.

Select Add Folder to add additional folders

To begin the upload process select “Upload Selected”.

Display Matrix Display Port (GPU) Output

See the separate document: Display Matrix Configuration.

FOR MORE INFORMATION ABOUT CHYRON VISIT:
[HTTP://CHYRON.COM](http://chyron.com)

PRIME System Types

- **Unlicensed** The dongle is not licensed. Contact ChyronHego
- **Designer** PRIME Designer is enabled. Playout is disabled.
- **Playout MX** Licensed for the lower cost hardware platform
- **Playout HX** Licensed for the highest performance platform
- **PRIME LT** This platform only allows for Newtek NDI input/output connections. No other output types can be configured.
- **Switcher** ?
- **CAMIO Renderer** Exclusively used by the CAMIO Renderer to provide previews in ChyronHego CAMIO News System Plugin